



Emergency

2025


WHOLESALE

LUMINAIRES



IP65-IP42

Pratica Modula Easy



TR

P. 2

SPOTLIGHTS



IP20 - IP65

Micro Dot

TR, AT

P. 6

EXIT SIGNS



IP40 20-30m


Exit

TR

P. 8

Pratica Modula Easy

emergency

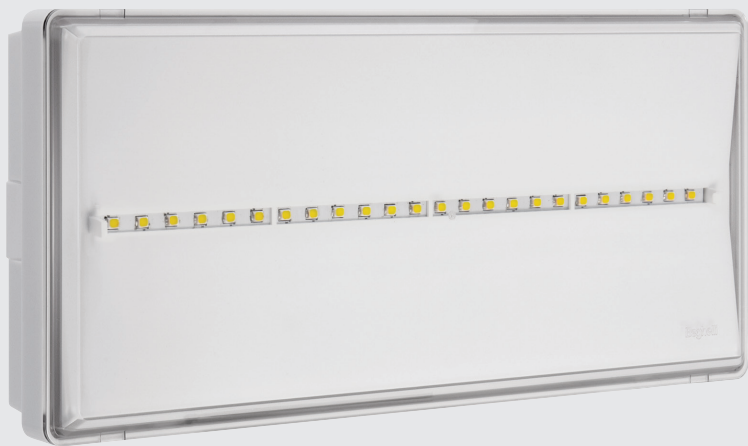

IP65

IP42

IK07

850°



RM

+50°C
0°C



Characteristics

Mounting Wall, ceiling, recessed, false ceiling, edge, tilted 45°, three-phase track, lighting busbars, suspended

Housing Polycarbonate, white RAL 9003


Screen Clear polycarbonate

Compliance CE, UKCA, EN 60598-1, EN 60598-2-22, EN 60598-2-2, EN 62034, UNI EN 1838, UNI 11222,

Applications



Industrial, service sectors, residential, hospitals, hotels, schools, offices

PRATICA MODULA

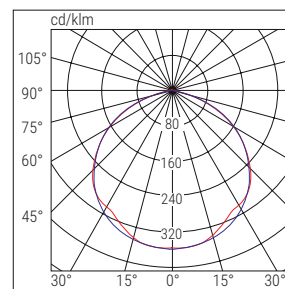

■ C0-C180



■ C90-C270

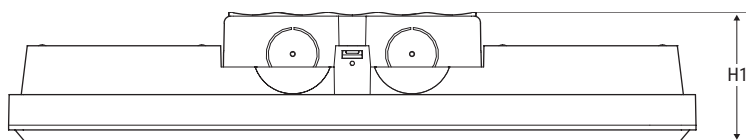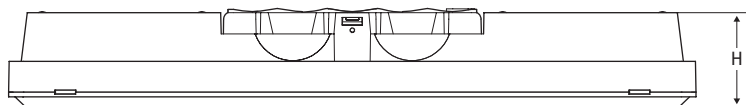

Dimensions mm				Distance of visibility (DV)
L	B	H	H1	
265	119	39	50	20 m

IP42
FLUSH WALL JUNCTION BRACKET INCLUDED

IP65
HIGHER WALL JUNCTION BRACKET INCLUDED

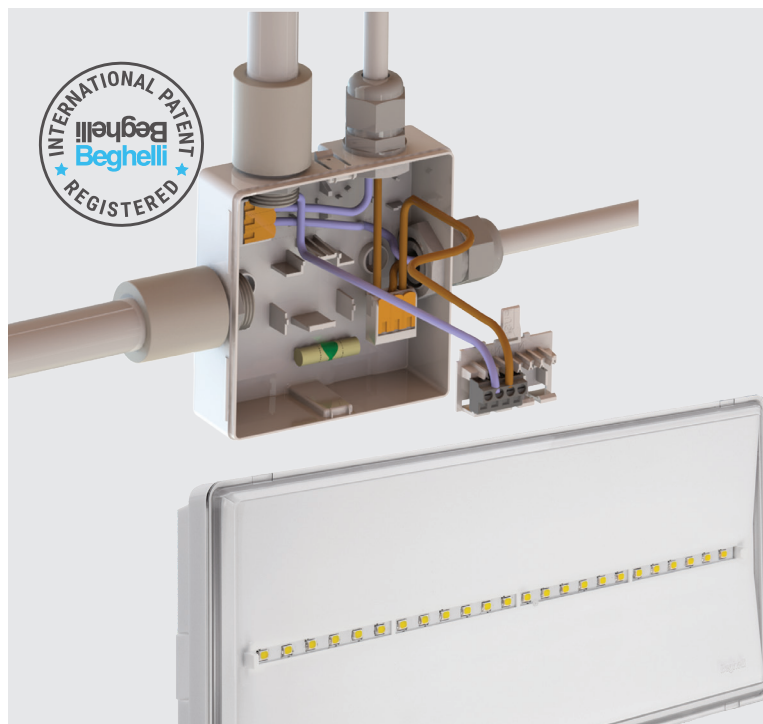

INTEGRATED EASY BOX JUNCTION BRACKET

**INSTALLATION TIMES REDUCED UP TO
MORE THAN 50%**

Modula system group together all the wiring and programming phases before mounting the luminaire.

	Cod.	Description	Version	Autonomy h	SE Flux lm	SA Flux lm	Absorbed Power		Notes
							DC	AC	
TR	18500	PM EASY EU 100 1/3h IP42 TRSA	SE/SA	1/3	100/40	250		1.2W	IP42
	18501	PM EASY EU 100 1/3h IP65 TRSA	SE/SA	1/3	100/40	250		1.2W	IP65
	18510	PM EASY EU 200 1/3h IP42 TRSA	SE	1/3	200/80	250		1.2W	IP42
	18511	PM EASY EU 200 1/3h IP65 TRSA	SE/SA	1/3	200/80	250		1.2W	IP65

ACCESSORIES - included



EASY BOX JUNCTION BRACKET



AESTHETIC FRAME

Cod. 18598

ACCESSORIES - to be ordered separately



CABLE GLAND + KIT IP65 ACCESSORY KIT
Low Conduit Box

Cod. 18592



SUSPENDED MOUNTING HOOKS


Cod. 3723

NEXT >

Pratica Modula Easy

emergency

ACCESSORIES – to be ordered separately



EM PROTECTIVE GRID
305x130x100mm

Cod. **18591**




EASY BOX JUNCTION BRACKET

Cod. **18589**



45° BRACKET

Cod. **18590**




RAIN COVER IN STAINLESS STEEL

Cod. **18597**




THREE-PHASE TRACK KIT

Cod. **4319**



PLASTERBOARD FALSE CEILING BRACKET + FRAME
Paintable

Cod. **18586**



RECESSED FRAME + BOX
Paintable

Cod. **18580**



LH/RH/UP/DOWN STICKERS
Included only in the SA versions

DV 20m - Cod. **18584**




LIGHTING BUSBAR BRACKET
Paintable

Cod. **18587**



SCREENS

DV 20m - Cod. **18593** (LH)
DV 20m - Cod. **18594** (RH)
DV 20m - Cod. **18595** (LOW)
DV 20m - Cod. **18596** (HIGH)




EDGE MOUNTING FIXING BRACKET

Cod. **18585**



EDGE MOUNTED SCREENS

DV 26m - Cod. **4127** (LH-RH)
DV 26m - Cod. **4128** (LOW)
DV 26m - Cod. **4129** (HIGH)



RECESSED BOX ADAPTER

Cod. **18599**



HIGH LUMINOUS EDGE MOUNTED SCREENS

DV 26m - Cod. **18581** (LH-RH)
DV 26m - Cod. **18582** (LOW)
DV 26m - Cod. **18583** (HIGH)



Micro Dot

emergency



WEB
CATALOGUE



IP20
IP65

IK07

850°

+40°C
0°C

RM



Characteristics

Mounting Recessed

Housing Polycarbonate, white

Optics Polycarbonate


Compliance CE, UKCA, EN 60598-1,
EN 60598-2-2, EN 60598-2-22,
UNI EN 1838, UNI 11222, EN 62034

Applications

Service sectors, offices, cinemas, hotels,
schools, shops, shopping centres,
residential.

LUNGALUCE

93%




■ C0-C180

■ C90-C270


LARGALUCE

94%




■ C0-C180

■ C90-C270

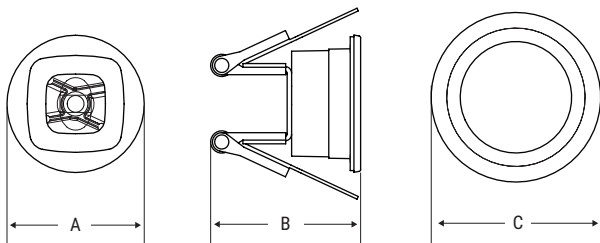

ADAPTER
RING

POWER SUPPLY MODULE - BATTERY

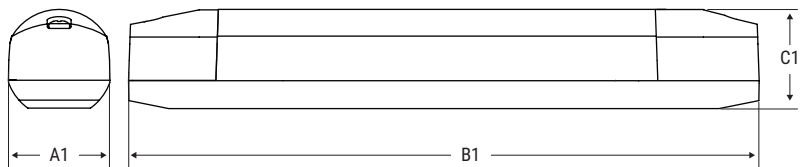

Version	Recessed hole mm	Dimensions mm						n° Module
		A	B	C	A1	B1	C1	
TR	Ø 30/40	37	40	46	27	197	27	1
TR-GL	Ø 30/40	37	40	46	27	197	27	2
AT	Ø 30/40	37	40	46	27	197	27	1
AT-GL	Ø 30/40	37	40	46	27	197	27	2

Performance according to EN 1838

Lens	Height	Centre distance ESCAPE ROUTES		Illuminated surface area LARGE AREAS	
					
	(m)	Wall (m)	Ceiling (m)	Wall (m)	Ceiling (m)
Lungaluce 3m	3	-	18	-	-
Largaluce 3m	3	-	-	-	13x13
		lighting >1lx at floor level along the centre line without reflection Emax/Emin <40		lighting >0,5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire Cod. 17919 500lm				Maintenance coefficient 0.8	

	Cod.	Description	Version	Autonomy h	Flux SE lm	Flux SA lm	Absorbed Power		Notes
							DC	AC	
TR	19715	MICRODOT TR SA/SE IP65 RM	SE/SA	1/1,5/2/3	500/360/250/180	220		3.7W	IP20/IP65
	19718	MICRODOT TR GL SA/SE IP65 RM	SE/SA	1/1,5/2/3	650/650/500/350	220		3.7W	IP20/IP65
AT	19716	MICRODOT AT SA/SE IP65 RM	SE/SA/PS	1/1,5/2/3/8	500/360/250/180/70	220		4.7W	IP20/IP65
	19719	MICRODOT AT GL SA/SE IP65 RM	SE/SA/PS	1/1,5/2/3/8	650/650/500/350/130	220		4.7W	IP20/IP65

ACCESSORIES - included

	LARGALUCE LENS
	LUNGALUCE LENS
	ADAPTER RING Ø40mm

ACCESSORIES - to be ordered separately

	RM INIBIT REMOTE CONTROL Cod. 2730	RM
	MICRODOT BLACK FRAME Lungaluce/largaluce lens and adapter ring included Cod. 19733	



7 spotlight



WEB
CATALOGUE



IP40

850°

IK05



+40°C
0°C

Characteristics

Mounting Wall, false ceiling, ceiling with rods and cables, edge mounting on wall, edge mounting on ceiling, three-phase track


Housing Polycarbonate, white RAL 9003

Screen Clear PMMA

Compliance CE, UKCA, EN 60598-1, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

Applications

Service sectors, industry

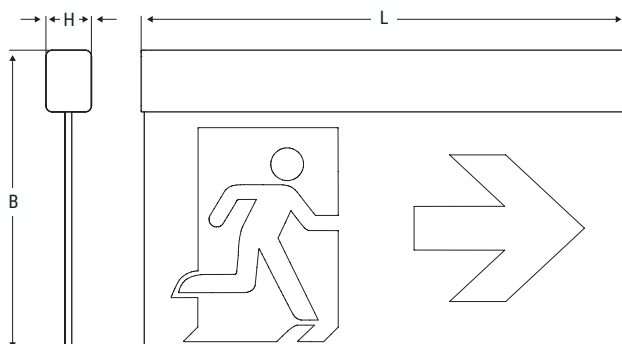

DV 20m



DV 30m



W	Dimensions mm			Distance of visibility (DV)
	L	B	H	
2	299	155	30	20 m
3	314	194	30	30 m

	Cod.	Description	Version	Autonomy h	Distance of visibility DV	Absorbed Power		Notes
						DC	AC	
TR	4320N	EXIT DF20M SA RM	SE/SA	1/1,5/2/3	20m		3.2 W	
	4321N	EXIT DF30M SA RM	SE/SA	1/1,5/2/3	30m		3.2 W	

ACCESSORIES - included



LH/RH/DOWN SCREENS

Screen print on opal polycarbonate

DV 20-30m



UNIVERSAL BRACKET

ACCESSORIES - to be ordered separately



RM INIBIT REMOTE CONTROL

Only TR and AT devices equipped with RM module

Cod. **2730**

RM



SUSPENDED MOUNTING ACCESSORY WITH CABLES

Cod. **14771**



SUSPENDED MOUNTING RODS

250 - 500 - 1000 mm

Cod. **4315** (250mm) - **4316** (500mm)
4317 (1000mm)



EDGE MOUNTING WALL BRACKET

60m versions only

Cod. **19045**



THREE-PHASE TRACK KIT

Cod. **4319**



CEILING RECESSED MOUNTING ACCESSORY

Distance of visibility

DV 20m - Cod. **4312**
DV 30m - Cod. **4313**



9 exit signs



BEGHELLI S.p.A. Via Mozzeghine 13/15 - 40053 Valsamoggia loc. Monteveglio (Bo) - Italy
Tel. +39 051 9660411 - info@beghelli.it - www.beghelli.com