

EuroCompleta LED


LED emergency luminaire



GENERAL CHARACTERISTICS

- Power*** 11, 24 W
- Power Supply** 230Vac ± 10% 50Hz
- Operation** Maintained (SA), Not Maintained (SE), Rest Mode
- Protection grade** IP65, IP42, IK08
- Autonomy** 1h, 3h
- Working temp.** -10°C ÷ +50°C
- Mounting** wall, ceiling, recessed, suspended ceiling, electrified track
- Housing** white polycarbonate RAL 9003
- Optics** symmetrical, white
- Diffuser** transparent polycarbonate
- Application** escape routes, antipanic

* Indicative power for comparison with fluorescent tube fixtures

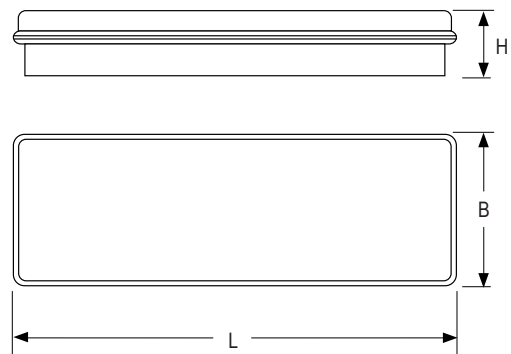

Power* W	• Dimensions (mm) •			Visibility distance (VD)
	L	B	H	
11, 24	300	138	55	24 m

EuroCompleta LED

W*	Order code	Description	Model	Autonomy	Battery	N° LED	** Flux SE lm 1h	Flux SE lm 3h	Flux SA lm	Power consump. max W	Weight kg	Pack single
11	4113	EUROCOMP LED IP42 SESA 1/3H LI-FE	SE/SA	1/3h	LiFe 3,2V 0,5Ah	16	120	40	120	2,5	0,8	1/12
24	4114	EUROCOMP LED IP42 SESA 1/3H LI-FE	SE/SA	1/3h	LiFe 3,2V 1,5Ah	16	350	70	200	4	0,8	1/12
W*	Order code	Description	Model	Autonomy	Battery	N° LED	** Flux SE lm 1h	Flux SE lm 3h	Flux SA lm	Power consump. max W	Weight kg	Pack single
11	4115	EUROCOMP LED IP65 SESA 1/3H LI-FE	SE/SA	1/3h	LiFe 3,2V 0,5Ah	16	120	40	120	2,5	1	1/12
24	4116	EUROCOMP LED IP65 SESA 1/3H LI-FE	SE/SA	1/3h	LiFe 3,2V 1,5Ah	16	350	70	200	4	1	1/12

* Indicative power for comparison with fluorescent tube fixtures ** Minimum flux guaranteed according to EN 60598-2-22

SIGN DIFFUSER VISIBILITY FLAG 24M



4117 LABELS AS PER TABLE

supplied

SAFETY SIGNALING (Visibility distance VD in table)



4124 SCREEN WITH LEFT/RIGHT ARROWS

to be ordered separately


4125 SCREEN WITH DOWN ARROWS

to be ordered separately

4126 SCREEN WITH UP ARROWS

to be ordered separately

SUSPENSION MOUNTING




3723 SUSPENSION HOOKS

to be ordered separately



ELECTRIFIED TRACK MOUNTING




3723 SUSPENSION HOOKS

to be ordered separately




Ø 16 OR Ø 20 MOUNTING



3727 PG 16/PG 20 CABLE GLAND

supplied




RECESSED MOUNTING




2742 IP 65 RECESS BOX

to be ordered separately

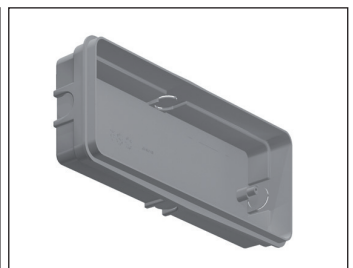


RECESSED MOUNTING ON SUSPENDED CEILING OR PLASTERBOARD




2751 FALSE CEILING BRACKETS

to be ordered separately



PROTECTION GRID



3907 PROTECTIVE GRID

to be ordered separately

