

**EDVEX** DOOR ENTRY

CATALOGUE ENGLISH

**VIEW** 
IoT smart lifeCONNECTED
PRODUCT



Intelligent products and interconnected systems.

Vimar is a one-stop shop offering connected systems and products for new builds, refurbishments or to modernise existing systems. A combination of solutions designed to enhance comfort, energy efficiency, safety and security, with matching styling. Customised products that liaise with one another continuously and in a perfectly integrated way to provide a concrete solution to the needs of those who build and enjoy spaces. **Our solutions respect the identity of every setting**, for total control of your home and of the building.





Communicating is easy with Elvox Video door entry systems.

Seeing what goes on outside the home, recognising those who ring our doorbell, even when we are out, are all crucial operations for living a quiet life. This is why we need access to sophisticated solutions based on innovative technology and a comprehensive range that can ensure safety and user-friendliness with a system that is simple to install.

High-performance technology to multiply solutions.

Due Fili Plus, IP and SIP technologies can be easily used to create even large systems, guaranteeing the highest performance in any type of building, from small homes to large residential complexes. High-performance systems that are capable of accurately meeting all building requirements.



A wide range of different indoor stations and outdoor stations.

An extensive selection of video entryphones, entryphones and outdoor stations for residential and service industry facilities. The products vary in dimensions, design, structure, type of system, smart and simple functions and various modes of installation.




IP, SIP and Due Fili Plus technologies


for high-performance, flexible systems.




Due Fili Plus technology is used to create high-performing video door entry and door entry communication systems in all types of building, whether new builds or refurbishments, in the simplest possible way. Due Fili Plus technology guarantees faultless connections between all devices used for receiving and transmitting power, audio/video and data signals.

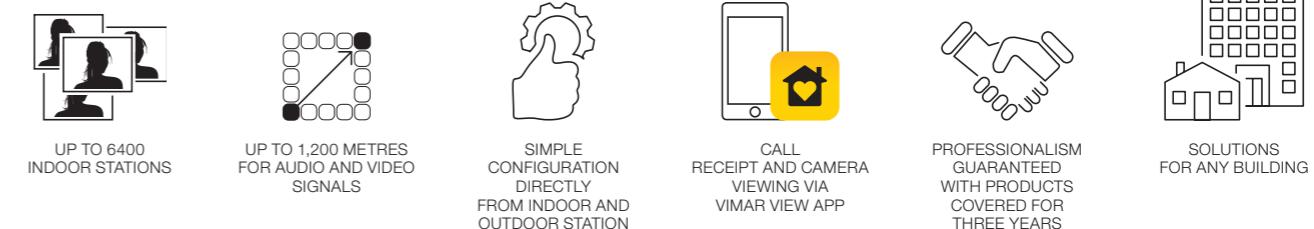

A system based on IP technology enables it to go beyond the limits of traditional video door entry systems: enhanced performance levels, multiple audio/video communication between indoor stations and outdoor stations and a potentially infinite number of users. All this is made completely simple, also through the use of existing LAN networks, without laying any specific wiring and with the possibility of sending calls to your smartphone instead of to the indoor station.


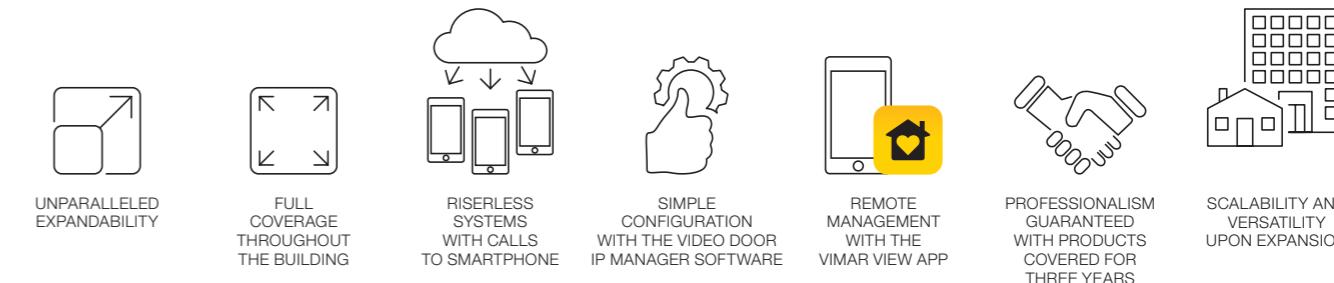


SIP (Session Initiation Protocol) is the most popular protocol used in the VOIP telephony business market, allowing the **creation of communication sessions of both audio or audio-video, between one or more participants**. These sessions include Internet phone calls (VoIP).

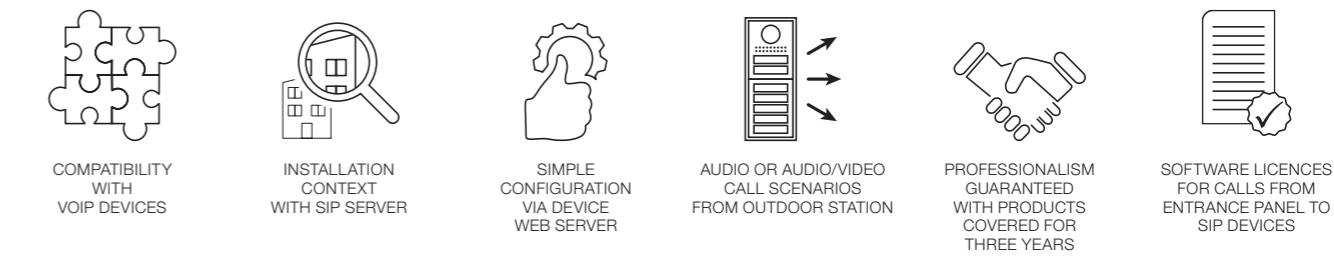

Tab 7S Up and Tab 5S Up connected video entry-phones for Due Fili Plus systems and supervisors for View Wireless connected systems.


Thanks to the firmware update, the Tab 7S Up and Tab 5S Up hands-free video entryphones have been integrated with new functions used to **control functions (lights, blinds and roller shutters, sensors, scenarios, climate control, energy and access control) of the View Wireless connected system**, previously created and configured with the View Wireless App. With the update, the graphic interface of the Tab menu has also been renovated and will be completely in keeping with the modern design of the Vimar View App. The update is also available for the Tab 5S Up and Tab 7S Up video door entry systems **already installed** and connected to the Internet.

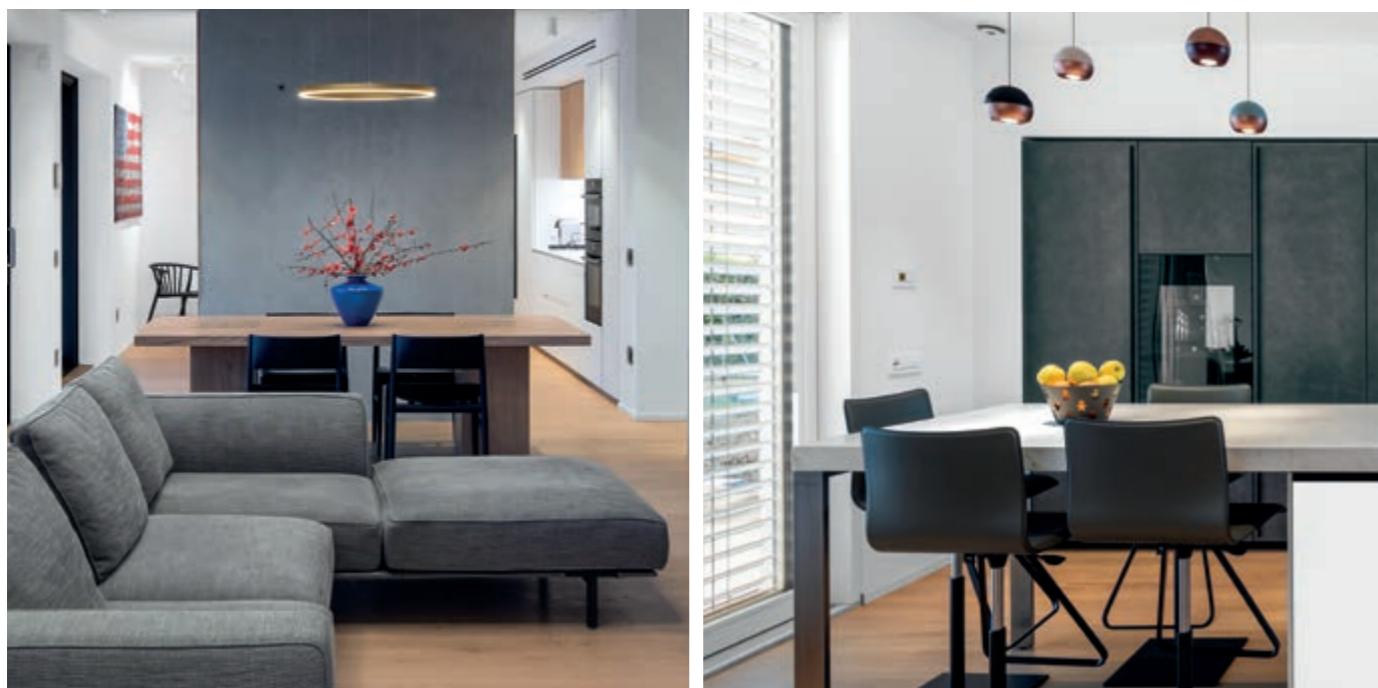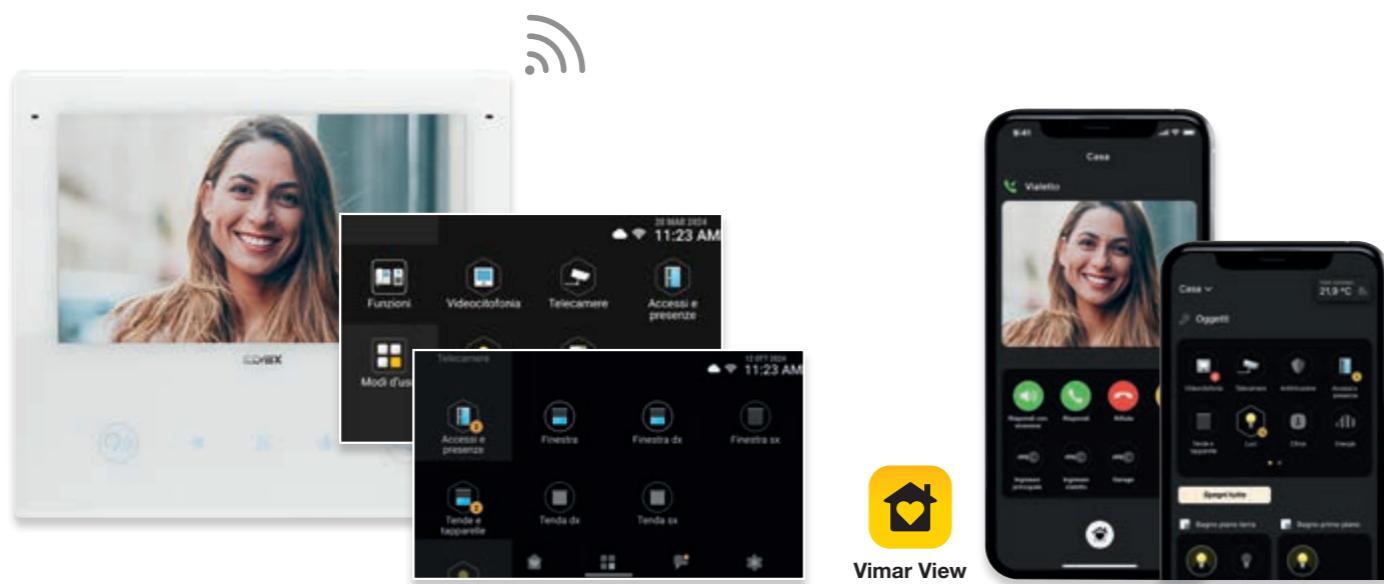

Due Fili Plus video door entry system



View Wireless connected system

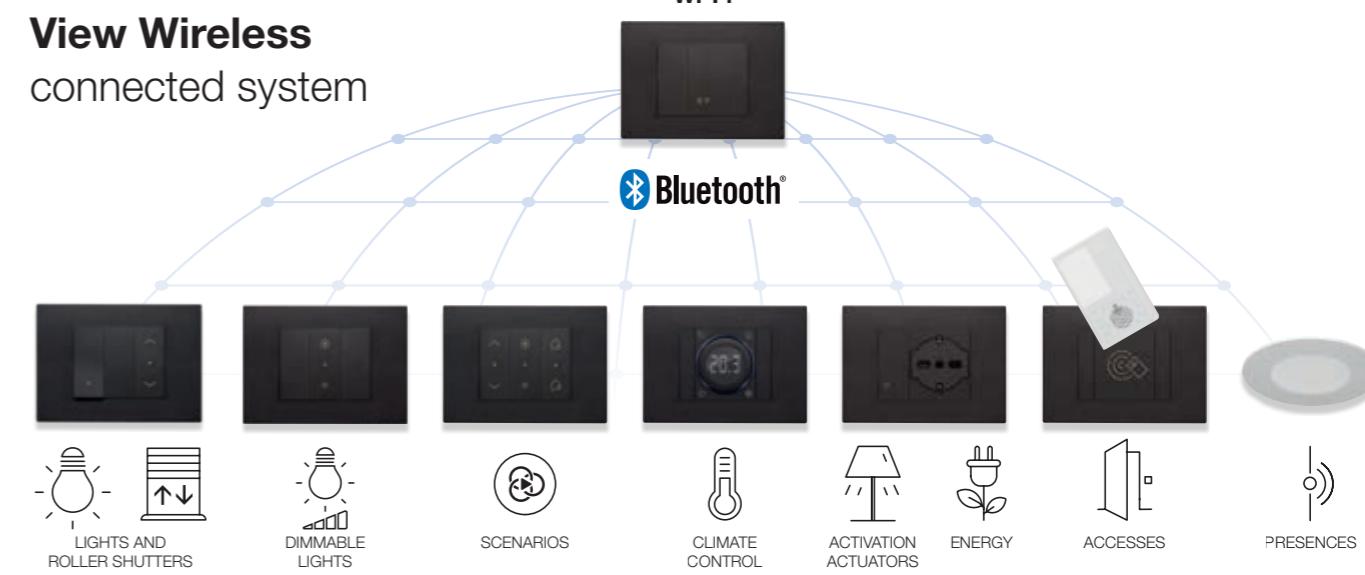

Characteristics:

- Control of all the video door entry functions from the video entryphone menu.
- Fast buttons on the front to answer calls, release a lock and auxiliary functions.
- Call forwarding via the integrated Wi-Fi to your smartphone with the Vimar View App.
- Import into Tab 7S Up and Tab 5S Up video door entryphones of the list of configurations and functions from the View Wireless system, via access to the Vimar cloud.
- Management and control of functions from the video entryphone menu.
- Scenario activation using the fast buttons on the front of the video door entry system or from the touch screen menu.
- Possibility of expanding the View Wireless system, according to the user's needs.
- Integrable in the system via the View Wireless App.


Vimar View App:

the only App for all Vimar systems.

The **Vimar View** App is the one and only App for managing Vimar's professional systems: **smart, home automation system, burglar alarm system, connected surface mounting thermostats** and **video door entry** for systems with IP and Due Fili Plus technology.


Used in combination with the Tab 7S Up, Tab 5S Up and IoT video door entry Gateways, outstanding performance levels can be achieved.

Up to 10 different video door entry systems can be managed in complete safety, for instance, your main home, your holiday home, the office and your relatives' homes too. Calls can be forwarded to up to 10 different users. To enjoy life and get out and about freely and with peace of mind, without ever losing sight of what's going on in your space.

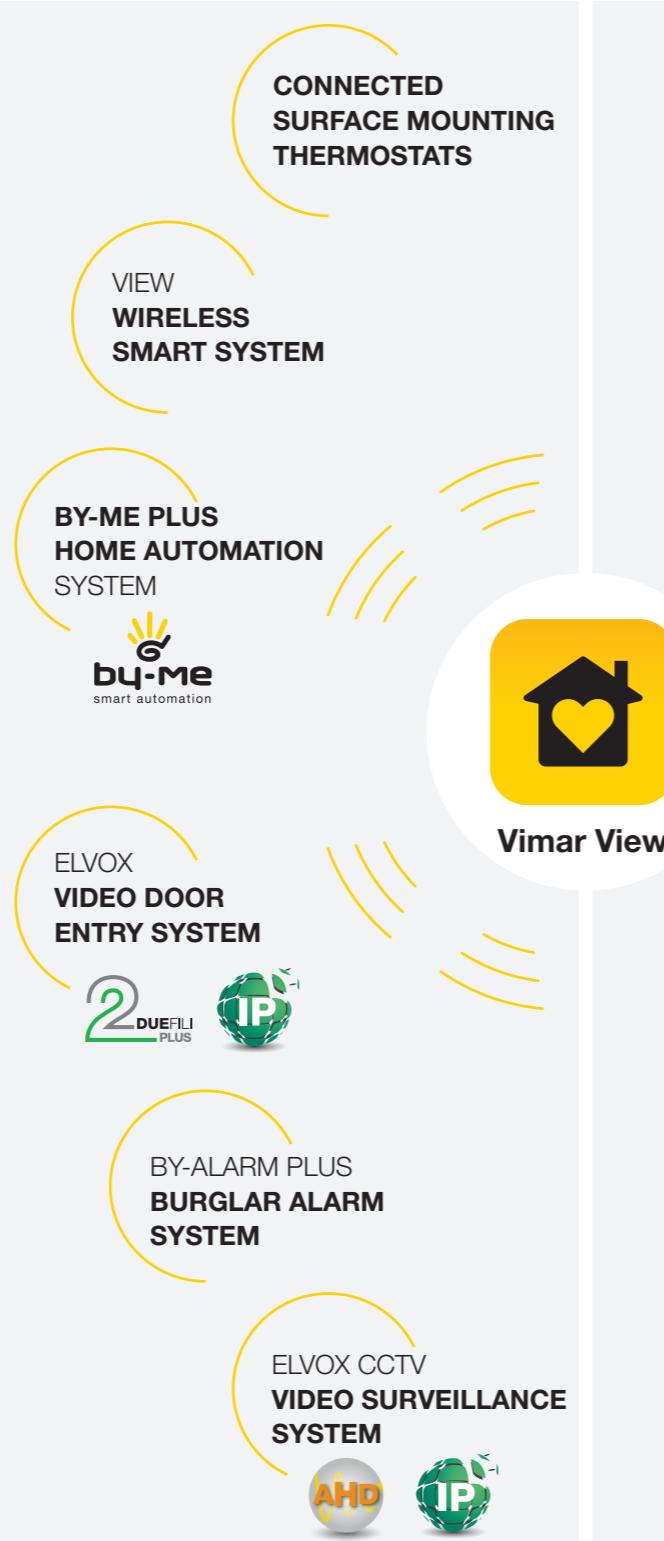


Multi-system

Up to 10 systems can be controlled with a single App.

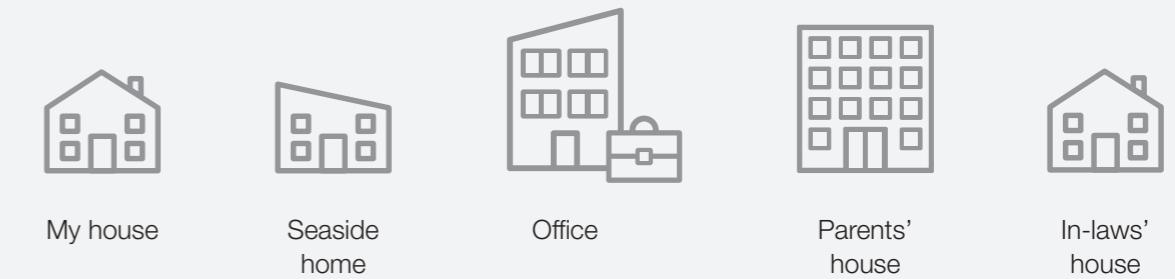

Multi-user

The video entryphone forwards the call to up to 10 users.

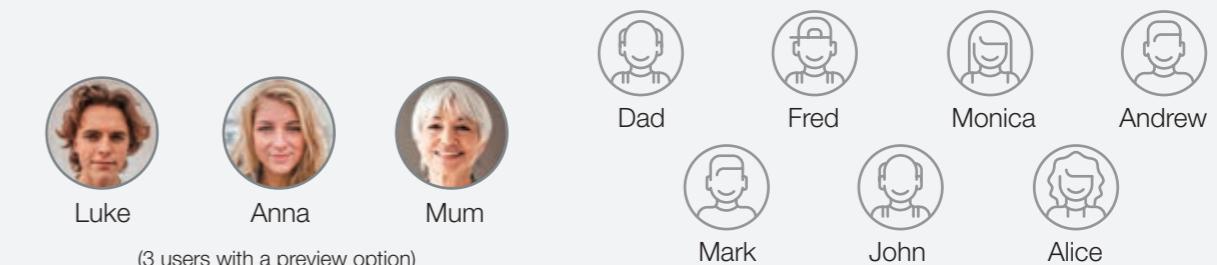

Multi-lingual

14 language versions: Italian, English, French, German, Spanish, Greek, Hebrew, Portuguese, Russian, Arabic, Turkish, Polish, Swedish, Dutch and simplified Chinese.

Multi-system

The **Vimar View** App manages and receives notifications from 10 different systems, with both Due Fili Plus and IP technology.






Vimar View App means more functions and more control.

Very simple configuration.

In just a few steps, you can associate the Vimar View App with the video door entry functions of your system thanks to the use of intuitive wizards.

Opening the entrance gate.

When you're not at home, but you need to let someone onto your property, you can open the gate from your smartphone or tablet. Problem solved.

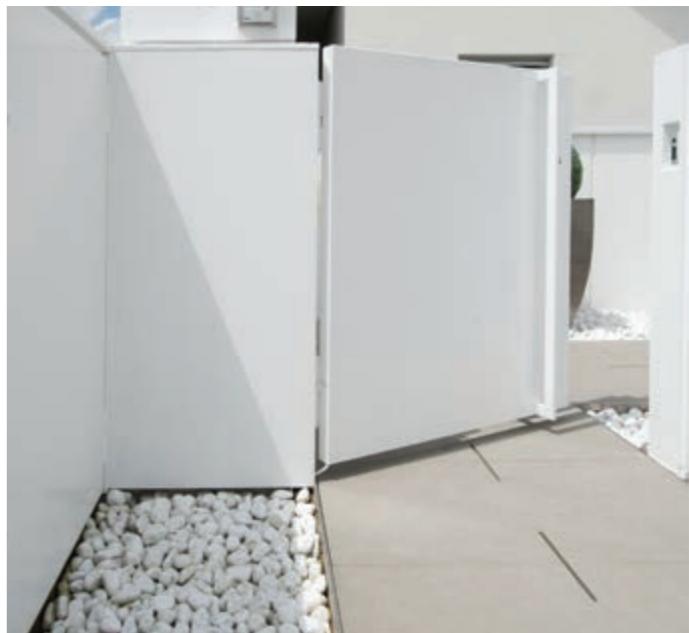

Activating auxiliary functions.

When on holiday or simply out and about, a simple tap on your smartphone or tablet will ensure your garden gets exactly the amount of water it needs, for instance; or you can open gates, garages and doors, turn on the lights in the garden or along the path.



Intercom calls.

In addition to talking between two video entryphones in the same building, thanks to the Vimar View App - from each system manageable - you can also make calls to and from the associated mobile device. Immediate and direct dialogue with your home, but also with your loved ones who, if they need help, can call your smartphone directly from the video entryphone.



Controlling all the cameras.

The video entryphone or smartphone and tablet give you round-the-clock control over all spaces, and you can keep an eye on things at all times. You can view the images of the cameras associated with the system or activate the video entryphone camera, without anyone ringing at the door.



Indoor and outdoor stations, communicating is easy, from home and also remotely, in total safety.

The **outdoor stations** vary in dimensions and types of installation, but they have one thing in common: elegance and sophisticated design in keeping with the most demanding architectural requirements. Surface mounting or flush mounting outdoor stations, monobloc, modular or special flush with the wall, they differ in their modern design and the availability for any type of installation.



PIXEL AND PIXEL HEAVY

Pixel and Pixel Heavy. Just 10 cm wide, affording simple installation in compact spaces, they stand out for their **extensive modularity**.


Pixel Up. It is made of **316 stainless steel** with brushed finish, distinguished by a linear design and by a reduced protrusion from the wall, of **just 3 mm**. It has a protection degree of IP54 and IK08 shock resistance.

Roxie. Robust, **versatile** and **sophisticated** video **entrance panel**. Ideal for installation in small and medium-sized home environments, with the possibility of calling **1, 2 and 4 homes**. It has a protection degree of IP54 and IK08 shock resistance.

Steely and Patavum. Steely in **steel** boasting a design that is trendy, linear and simple, with a contemporary taste. Patavum in **satin finish brass** with sinuous curves, beauty and elegance, ideal in premium settings.

1200 and 1300 series. Entrance panels with soft and modern silhouettes, and **scratch-resistant finishes**. 1200 series, in **stainless steel** with embossed surface and 1300 series in **electro-polished anodised aluminium**.

The **indoor video door entry system** stations - hands-free or with a handset - stand alone or integrated in the By-me Plus home automation system, feature exquisite, modern, prized finishes and are thinner than traditional devices. A full range designed elegantly to adapt to the widest range of living styles. Top-quality materials, stylish silhouettes, prized finishes for functional styling and totally user-friendly operation.

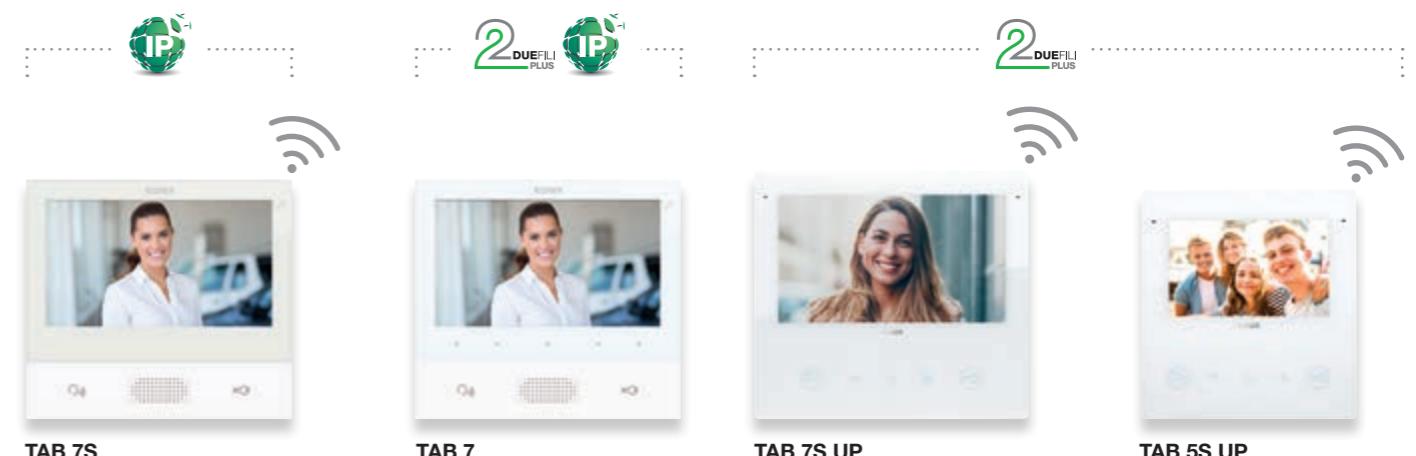

TAB 7S

TAB 7

TAB 7S UP

TAB 5S UP

Tab 7S and Tab 7. Tab 7S available with **integrated Wi-Fi** and **touch display**, allows **call repetition** and system management with the Vimar View App. Tab 7 is available for IP and Due Fili Plus technologies, **easy to use** yet superior in style. Both with a 7" display.

Tab 7S Up and Tab 5S Up. Light, sleek and sophisticated silhouettes, easy to use and programme, with 7" or 5" **touch display** and **integrated Wi-Fi**, in constant dialogue with the Vimar View App via smartphone or remotely. Integrated with new features used to **control functions (lights, blinds and roller shutters, sensors and scenarios)** of the View Wireless connected system.



TAB 4,3

TAB FREE 4,3

TAB JR.

VOXIE

Tab 4,3 and Tab Free 4,3. With a 4.3" display, they provide a generous view of the world outside your home. **Compact, stylish** video entryphones, **with or without handset**, distinguished by a smooth glass effect surface.

Tab jr. and Voxie.

Entryphones with **handset or hands-free**, for those seeking the **basic essentials in both the silhouettes and the functions**, devised for those who don't need the video function: they blend in with any lifestyle.



Residential



Single home



Brown

Brown
Jones


Two-family home

Terraced houses
with main communal entranceBrown
Jones
Evans
Wilson

Four-family compounds



Bed and Breakfasts

HILLTOP
VIEW

Offices



Sports facilities

OUTDOOR STATIONS

Roxie.

Robust, versatile and sophisticated.

Roxie is modern, with understated silhouettes, and it stands out for its elegance and robustness. Made of zamak, it was built to stand the test of time and withstand all weather. It features innovative, state-of-the-art technology which makes it a simple yet high-quality choice.

Surface
mounting with
rain-proof frameFlush
mounting with
frame

Robust structure.

Made of zamak with RAL 9007 aluminium grey coloured metallic finish, weather resistant with IP54 protection degree (water and dust) and IK08 shock resistance.



Wide recording angle.

Camera with superior visual performance, crystal-clear images and wide recording angle.



Supplementary video camera.

Video signal input for connection to an additional outdoor camera.



Audio

"Invisible" speaker; outstanding audio quality.



Audible and optical signalling.

Audible signalling with voice messages and optical signalling via signal LEDs.



Up to 4 call buttons.

Possibility of managing calls with 1, 2 and 4 push buttons (backlit)



Installation versatility.

Surface mounting with and without rain guard, flush mounting with frame.



Easy to configure.

Easy configuration of the various basic and advanced functions with the View Wireless App designed for user-friendly configuration.



View Wireless

Possibility of performing configuration also from buttons, DIP switches and SaveProg software.

OUTDOOR STATIONS

Roxie.

Several functions for top-performing solutions.

Roxie stands out for the attention and care for every tiny detail, from the layout of the electronics to the versatility afforded by the various functions, to create a complete and secure video door entry system with ease.



Virtual credentials for access control.


Access control of the **Roxie** video entrance panel, which can be activated with **tags** (digital proximity keys) or with **transponder cards**, can now also be managed using the **View Key** App, with which the user can open the entrances controlled by the outdoor station directly from their smartphone. The ideal solution for small hospitality facilities such as **B&Bs**.

From the View portal, which can be accessed via a browser from any PC or tablet, the accommodation facility manager can create new users, enter how long guests are staying for (check-in, check-out) and send e-mails containing virtual access keys to be activated in the App. The same portal can also be used to manage the validity periods of accesses via physical cards enrolled in the system and also consult the access logs. After receiving the e-mail invitation, the customer then uses the **View Key** App to activate their digital key ring clearly and effortlessly. Operation is a breeze: thanks to Bluetooth® connectivity, simply approach the entrance panel with your smartphone to activate the opening of the entrance controlled by the outdoor station in one simple move.

Access control with tags and transponder cards:

- **Mifare RFID digital key tag**, to be used in proximity of the entrance panel.
- **Mifare transponder card**, ideal in applications for small hotels, accommodation facilities and wellness amenities.



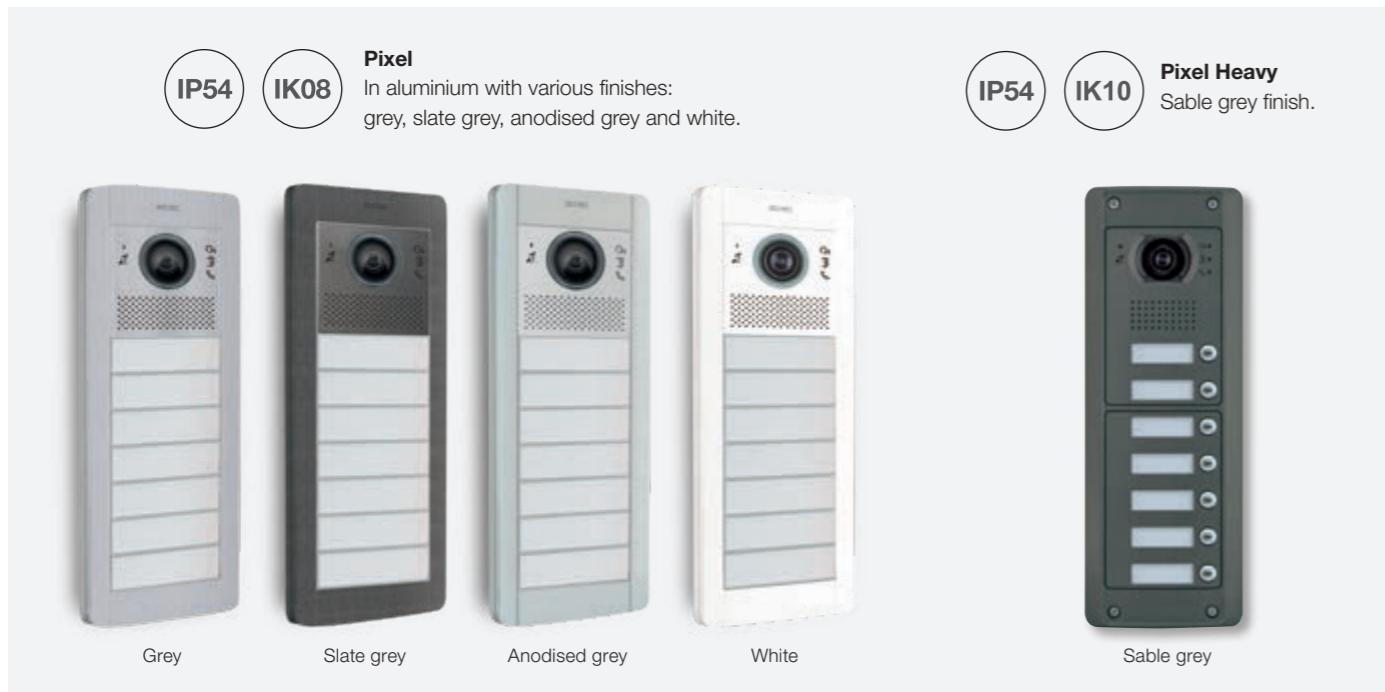

OUTDOOR STATIONS

Pixel e Pixel Heavy. Beauty and strength.



Modular entrance panels with a slim, modern design. Pixel, in aluminium, with four colour variants: grey, white, slate grey and anodised grey. Pixel Heavy, in zamak, with a single special sable grey finish, which offers greater weather and impact resistance, with IK09 and IK10 protection degrees. Affording extensive modular design possibilities and freedom of composition, Pixel can be ordered specifically as you want it, responding perfectly to actual installation needs.

Video camera with wide-angle lens.

The audio/video module has a video camera with a wide-angle lens and high-definition recording. A zoom function can also be set from the indoor stations, where multiple recording windows can also be browsed.

High sensitivity and automatic lighting control.

The sensor sensitivity recognises guests even in poor lighting. The luminous intensity of the lighting LEDs is automatically adjusted according to the surrounding luminous intensity.

Up to 4 push buttons in a single module.

The audio or audio/video module, which is the heart of the panel, comes with 4 push buttons in two rows for installation in small residential contexts.

Push buttons with LED backlighting.

The call buttons have LED backlighting with white LEDs for maximum readability of names. Backlighting and the intensity setting is controlled by the integrated dusk/dawn sensor.

Visual call signalling.

An LED on the front indicates calls in progress and any active communications, whether the lock control is enabled, or a missed call if the line is busy.

Echo canceller and noise reduction.

Echo Canceller means you can have a natural, two-way conversation, automatically avoiding annoying audio feedback (Larsen effect). You will hear loud and clear thanks to the Noise Reduction function.

Hard of hearing function and speech synthesis for visually impaired users.

The hard-of-hearing function allows hearing aid wearers to listen to the conversations directly in the hearing aid; the voice synthesis allows the blind and poor-signed to listen to a specially recorded vocal message reproduced by the entrance plate for each command.

Automatic gain control.

Sound levels are always outstanding thanks to automatic gain control (AGC) and voice activity detection (VAD).

Impact resistance and degree of protection.

Pixel is an aluminium panel affording a high degree of protection against atmospheric agents (IP54) and against impacts (IK08). Pixel Heavy in zamak is even more resistant, with IK09 and IK10 ratings.

Functional, ultra-slim design.

Being just 100 mm wide and protruding from the wall by just 14 mm (Pixel) or 18.5 mm (Pixel Heavy), the panel's small, shape-enhancing dimensions enable it to be mounted on metal pillars, making it the ideal solution for confined spaces.

Flexible, modular development, from 1 to 84 calls.

Pixel and Pixel Heavy can be used to create various combinations according to need, starting from 1, 2 and 3 modules vertically and up to 3 rows horizontally, for a composition of 9 modules and allowing up to 84 calls with rocker buttons.

Modular design.

Owing to the availability of different-sized push buttons, Pixel can be composed freely to accommodate specific installation requirements.



Single axial
button
(one call)

Double axial
button
(two calls)

Double row single
rocker button
(four calls)

OUTDOOR STATIONS

Pixel and Pixel Heavy.


Absolute modularity.

**Installation to suit your needs.**

Rapid front access to the audio/video unit and other expansion modules for routine maintenance without having to remove the panel completely from its mounting frame.

LCD colour display and contacts list with up to 6400 names.

With its 3.5" LCD colour display and user-friendly navigation menu, it can manage up to 6400 names. Calls can be made by scrolling the contacts list or entering the required number. And with an 80° horizontal viewing angle, information can easily be read on the display even in direct sunlight.

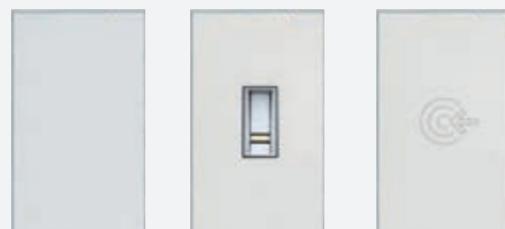**Expansion modules.**

Pixel is a dynamic solution, as it allows you to create all the compositions you need, using additional modules and combining audio or audio/video electronic units. Every panel can hold up to 5 button modules in a single row and 10 in a double row, complete with alphanumeric keyboard, display with electronic contacts list, or backlit name plate, biometric sensor or transponder.

Flush-mounting in series or surface mounting with rain-proof frame.

Pixel panels can be either flush mounting or surface mounting. In both cases, they guarantee great functional performance. For mounting in series, the flush mounting boxes are fitted with a spacer that secures them tightly together. In Pixel entrance panels, it works like a cable outlet because the void, watertight interior guarantees total protection for the wiring. Furthermore, a cardboard antimortar cover protects them during installation. Flush mounting can be completed by adding the rain-proof frame which is incorporated into the surface mounting boxes.



Flush mounting boxes for Pixel panels





Flush mounting boxes for Pixel Heavy entrance panels

For installation with universal adaptors.

Universal adaptors are designed to mount Pixel and Pixel Heavy modular panels to replace and renovate an existing entryphone or video entryphone system. Being universal, these adaptors are totally compatible with the most widely available flush mounting boxes on the market.



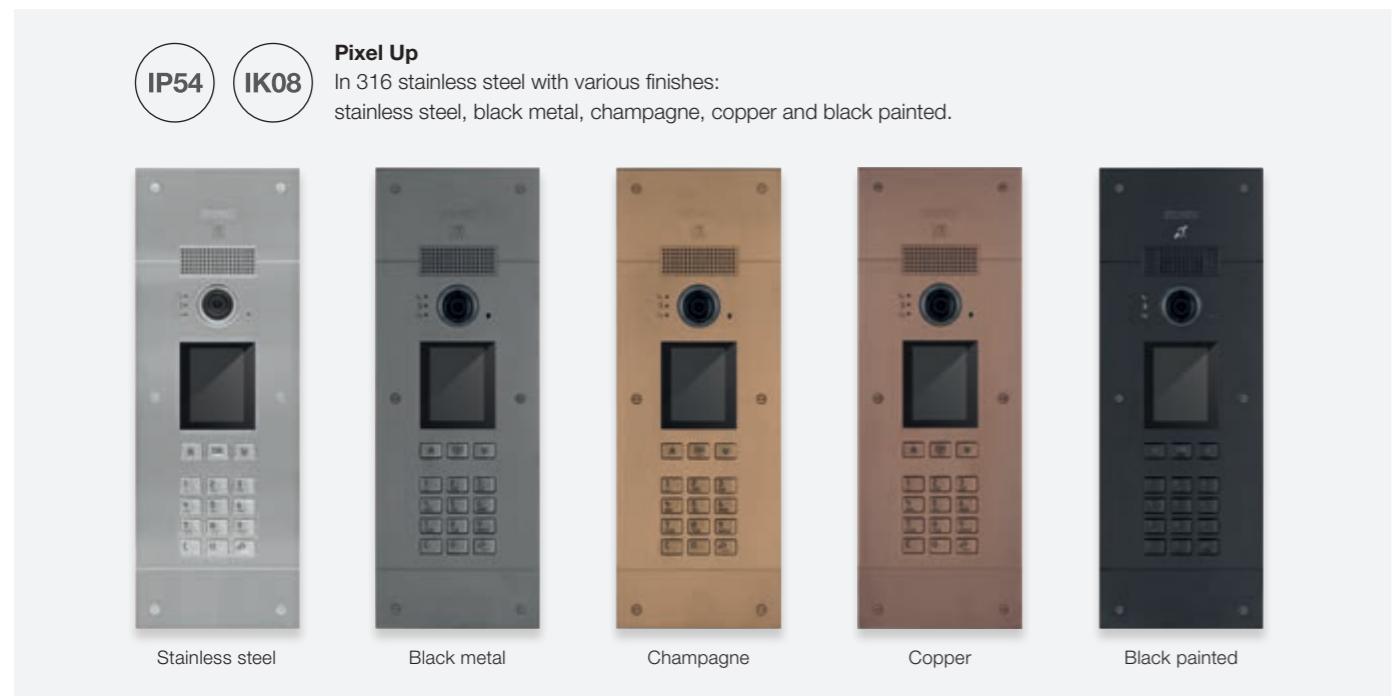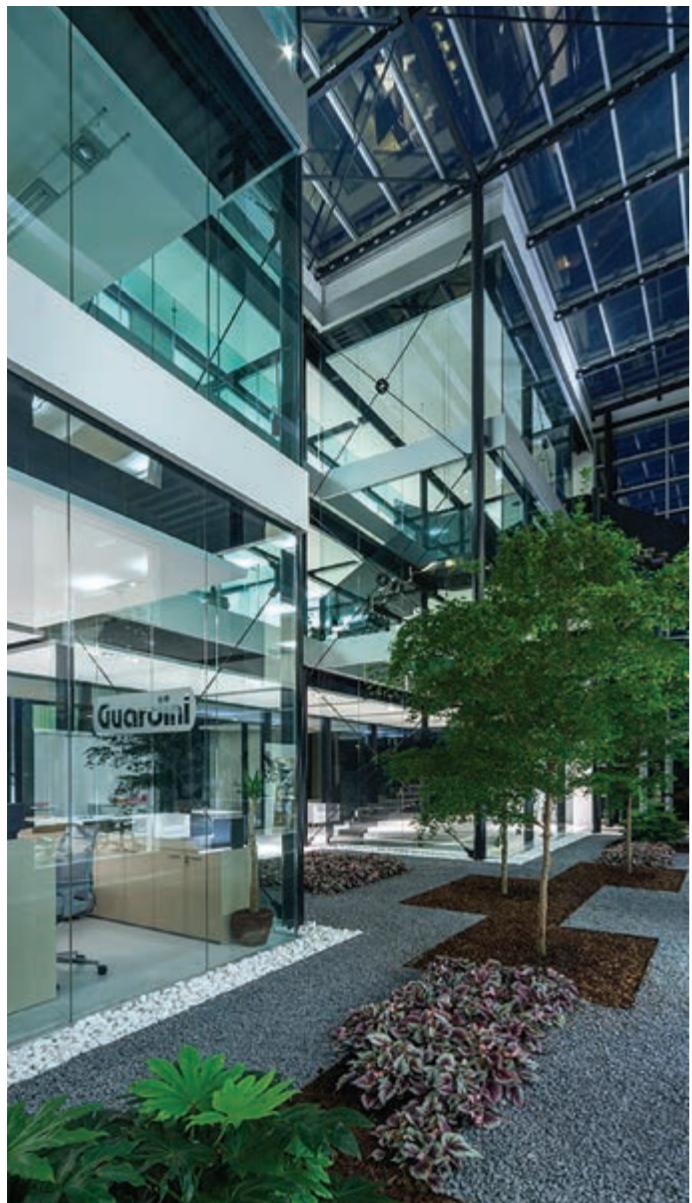

OUTDOOR STATIONS

Pixel Up.

Slim and strong.

Pixel Up is the entrance panel with front cover plate made of 316 stainless steel with brushed finish, with thin thickness and distinguished by a linear design and by a reduced protrusion from the wall, of just 3 mm. Available in the version with alphanumeric keyboard, stainless steel buttons and colour display protected by 5 mm thick polycarbonate glass, it has protection degree IP54 and protection degree IK08 for impact resistance. For flush mounting, the entrance panel is supplied with a stainless steel box, to which the cover plate is fixed using special anti-tamper screws.

Wide-angle camera.

Camera with high-definition wide-angle lens. Recording range can be controlled directly from the indoor station using the pan&zoom function.

Sensor: high-sensitivity and HDR.

The high sensitivity of the sensor allows you to see even in areas with low brightness. The High Dynamic Range (HDR) technology in fact allows you to identify the caller even in poorly lit areas.

ABC.. Accessibility.

ABC.. The display features high-contrast colours to facilitate name identification and improve reading. The device uses large-sized characters and symbols, so it can also be used by the visually impaired.

Backlit keyboard.

C 3, 7, 9
C 4 Backlit stainless steel keys with Braille codes featuring multitap function for rapid name search.

Automatic brightness setting.

The intensity of the LEDs used for lighting the video camera is self-adjusting according to the environmental light, to ensure optimal visibility of the caller and the surrounding area.

High performance 3.5" display.

3,5" Wide viewing angle and backlighting that allow easy reading of information even in bright light. 5 mm thick polycarbonate screen protector.

Composition.



The 405x145 mm cover plate is fixed to the mounting box (382.1x124.1x60 mm) with special steel anti-tamper 6 screws. It can also be surface mounted using the dedicated box with rain-proof frame.



Wide-angle camera.



Sensor: high-sensitivity and HDR.

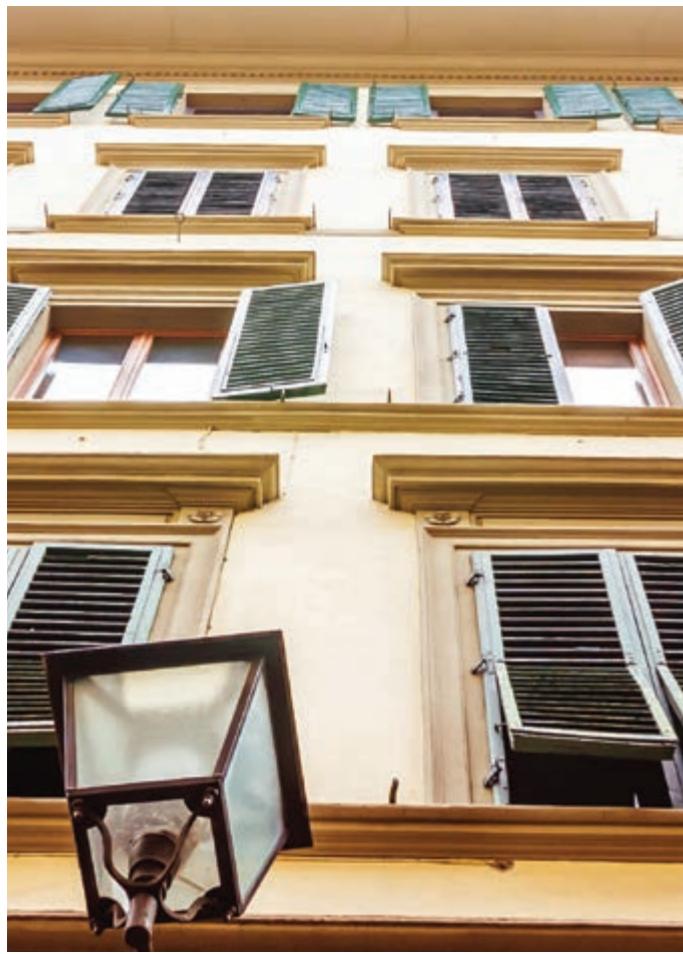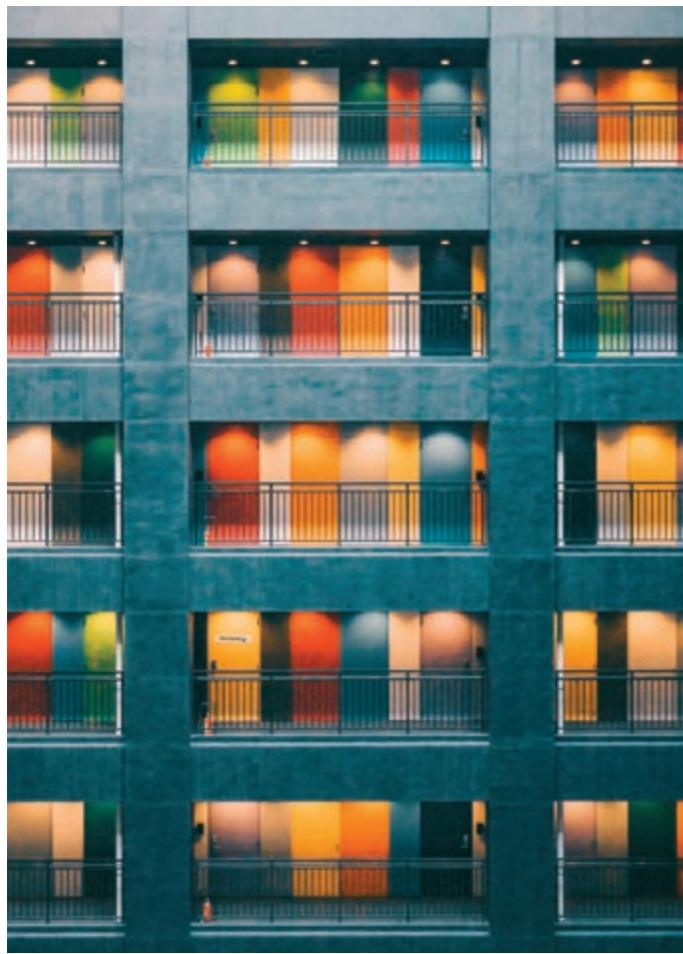

OUTDOOR STATIONS

Steely and Patavioum.

One design for every style.

Two video door entry entrance panels, which differ in shape, finish and material, yet which have one thing in common: sophisticated design, in keeping with the highest architectural expectations. These are the assumptions on which the new Patavioum is based, combining the charming appeal of brass with rounded, elegant and timeless silhouettes, and Steely, in steel, modern and linear. Perfect for interpreting all styling and functional requirements.

Steely: modern appeal and impeccable styling.

Trendy, linear and simple. Three characteristics which - when combined with technological innovation - make Steely the perfect complementary feature for any building, accommodating all functional needs.

Made of steel, a simple, hard-wearing material that characterises the DNA of the Steely entrance panel and complements its contemporary, modern and technological style.

Patavioum: everlasting appeal.

Golden reflections emphasise the sinuous curves for an ever trendy concept of beauty and sophistication. The brass used and the timeless design make it ideal in prestigious settings or combined with historical buildings.

In brass with an elegant satin finish, on request Patavioum is also available in a polished version to enhance and endow every space with its very own personal form of expression.

Camera with manual vertical and horizontal tilt functions.



Lighting of recording area with white LED light.

Full duplex communication.

The internal and external volume, and the sound balance can be adjusted to obtain an optimum conversation volume.



Fully modular. Patavioum and Steely can also be combined to suit individual requirements, placing the cover plates side-by-side horizontally, even vertically for Steely.

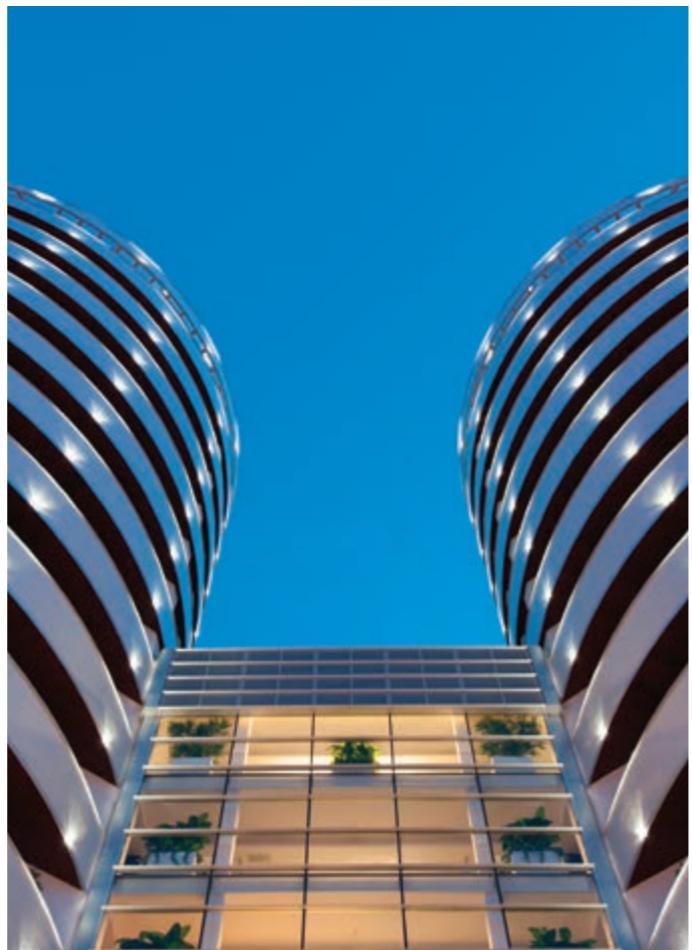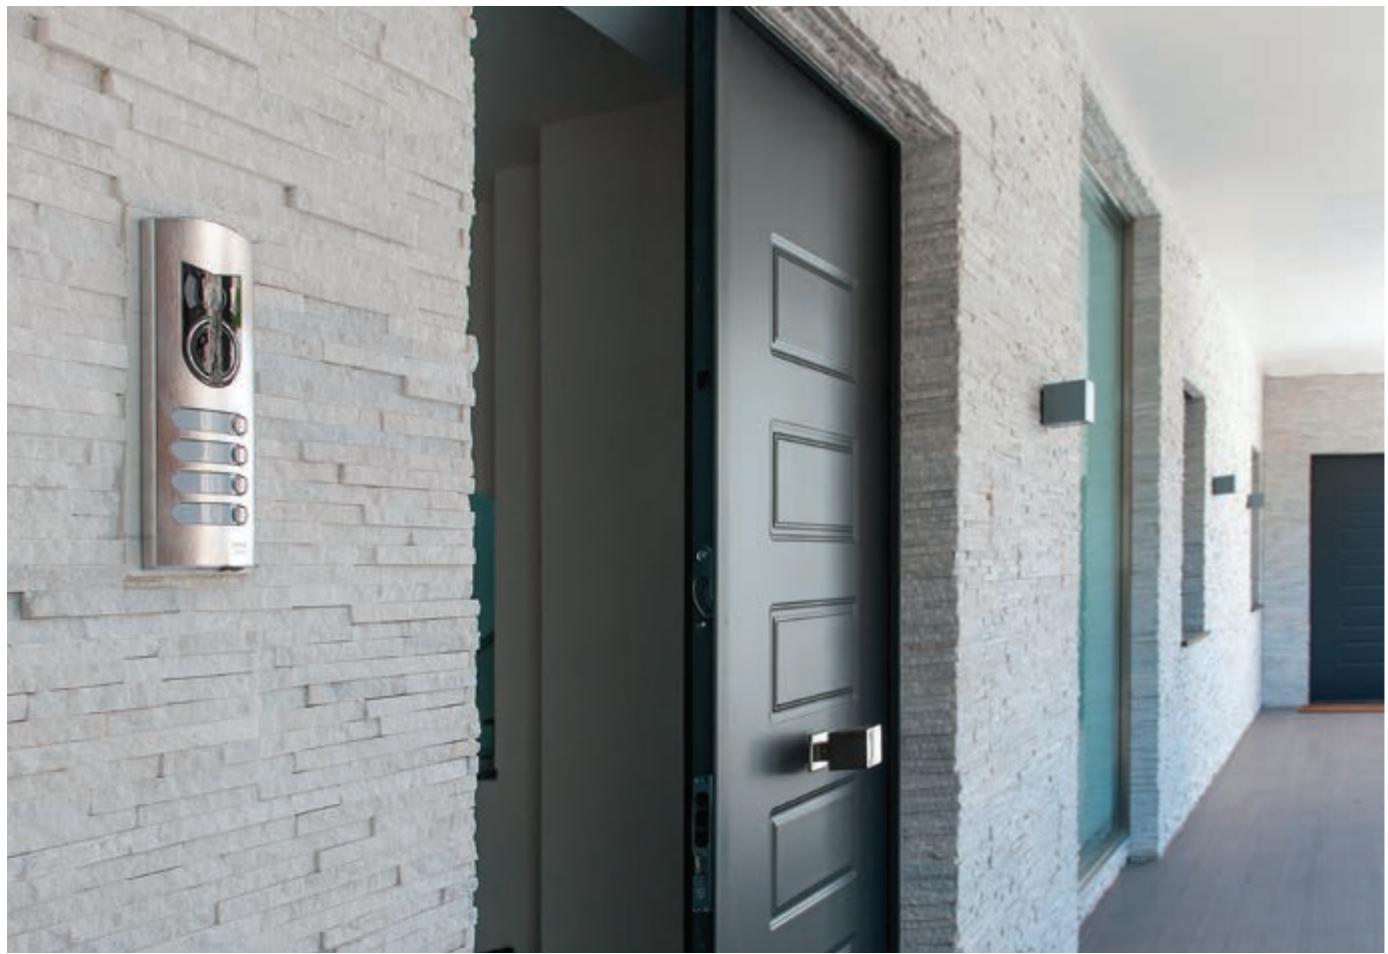

OUTDOOR STATIONS

1200 and 1300 series. Modular and versatile.



Video door entry entrance panels, with common features yet with different materials, Series 1200 in stainless steel and series 1300 in anodised aluminium. In audio and audio/video version, to be completed with electronic units, to arrange multiple combinations and adapt to any lifestyle to perfection. Series 1200 and 1300 can be composed as desired, choosing between the audio unit and the audio/video unit, expansion modules with push button modules, display and alphanumeric keyboard. In the series 1300 cover plates, the blank modules can be replaced with traditional push buttons and vice-versa, so you can compose your keyboard to your liking.

**Series 1200: high performance and versatility.**

Fine finishes, high-performing yet concurrently user-friendly technology. Series 1200 can be flush mounted or surface mounted and is also available in a reinforced version, in sable grey satin-finish paint, which is particularly weather-resistant and offers a IK10 degree of protection against impacts.

Series 1300: built to suit your needs.

Soft design with scratch-resistant finish. Made from 1.8 mm thick electro-polished anodised aluminium. Designed both for flush mounting and for surface mounting with a rain-proof frame.



INDOOR STATIONS

Tab 7S Up and Tab 5S Up, connected video entryphones.

Ease and safe communication.

The video door entry indoor stations are renewed with two important innovations, ideal for renovation or new buildings. Functional and connected, they can be managed remotely thanks to the Vimar View app, very easy to program and install.



TAB 7S UP
7" touch display



 **Slim profile.**
Surface mounting or semi-flush mounting, affording minimal protrusion from the wall (13.1 mm), thanks to the dedicated mounting box for masonry and hollow walls.

 **Finishes: white and the new black.**
Black and white glass cover, to adapt to various décors with elegance.

 **High resolution display.**
The colour display frames a high definition image of who's ringing at your door, 1024 x 600 pixels for Tab 7S Up and 800 x 480 pixels for Tab 5S Up.

 **User-friendly graphic interface.**
Smart menu with scrolling pages and selectable black or white background.

 **Capacitive keyboard.**
Touch controls with intuitive icons and LED backlighting.




TAB 5S UP
5" touch display



 **Optical and acoustic signalling.**
Crystal-clear sound and visual feedback confirm the activation of the functions, facilitating use for the visually impaired or hearing aid wearers too.

 **Integrated Wi-Fi.**
With Wi-Fi it is possible to manage your calls via the restyled Vimar View App.

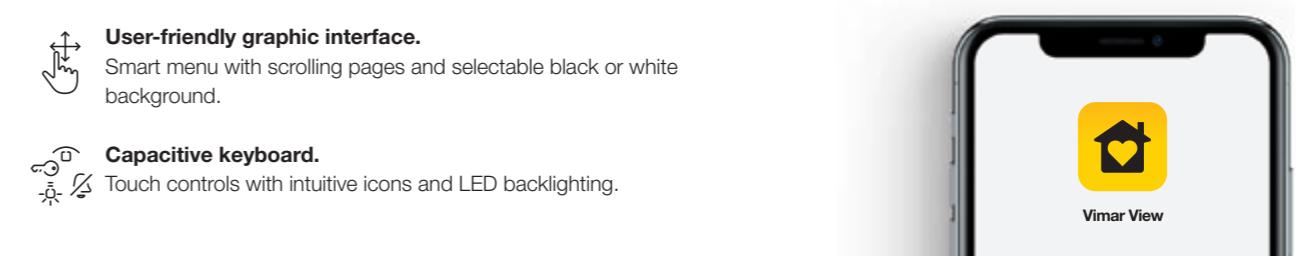



TAB 7S

INDOOR STATIONS


Tab 7S and Tab 7.

Light weight and understated silhouettes.

In addition to traditional video door entry functions, Tab 7S with integrated Wi-Fi and View App allows call repetition on your smartphone, ensuring total control even when you are out and about.



TAB 7S
7" touch display

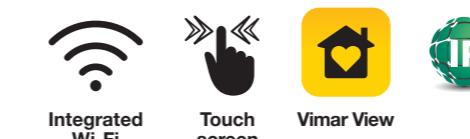

 **Tab 7S, with integrated Wi-Fi.**

Communicates instantly with smartphones and tablets via the View App. Just tap once to answer video entryphone calls from any room in the home, with complete freedom of movement: receive calls from the entrance panel, make intercom calls, release the lock, activate auxiliary services, switch on the stair lights, start the irrigation system, send and receive text messages or consult recorded messages.



TAB 7
Display da 7"



 **Extra high resolution 7" display.**

The LCD colour display offers a magnificently large and well defined image: 7" with 800x480 pixel resolution.

 **Capacitive keyboard and touch controls.**

Flush capacitive buttons, in keeping with the minimal design of the entire device. The Tab 7S model also offers the touch screen function: fast and sensitive, this allows the user to activate controls simply by touching the display.

 **No-nonsense speaker.**

To achieve a sound system as clear and free of disturbance as possible, voice reproduction is always faultless.



 **White, glass effect.**

Selected to blend in with any interior décor, used for the special "glass effect". The effect is sparkling, like glass, and creates artful suggestions of transparency.

 **Teleloop.**

So that hearing aid wearers can also use the system; with tactile aids designed to facilitate operation of the controls by persons with impaired vision.



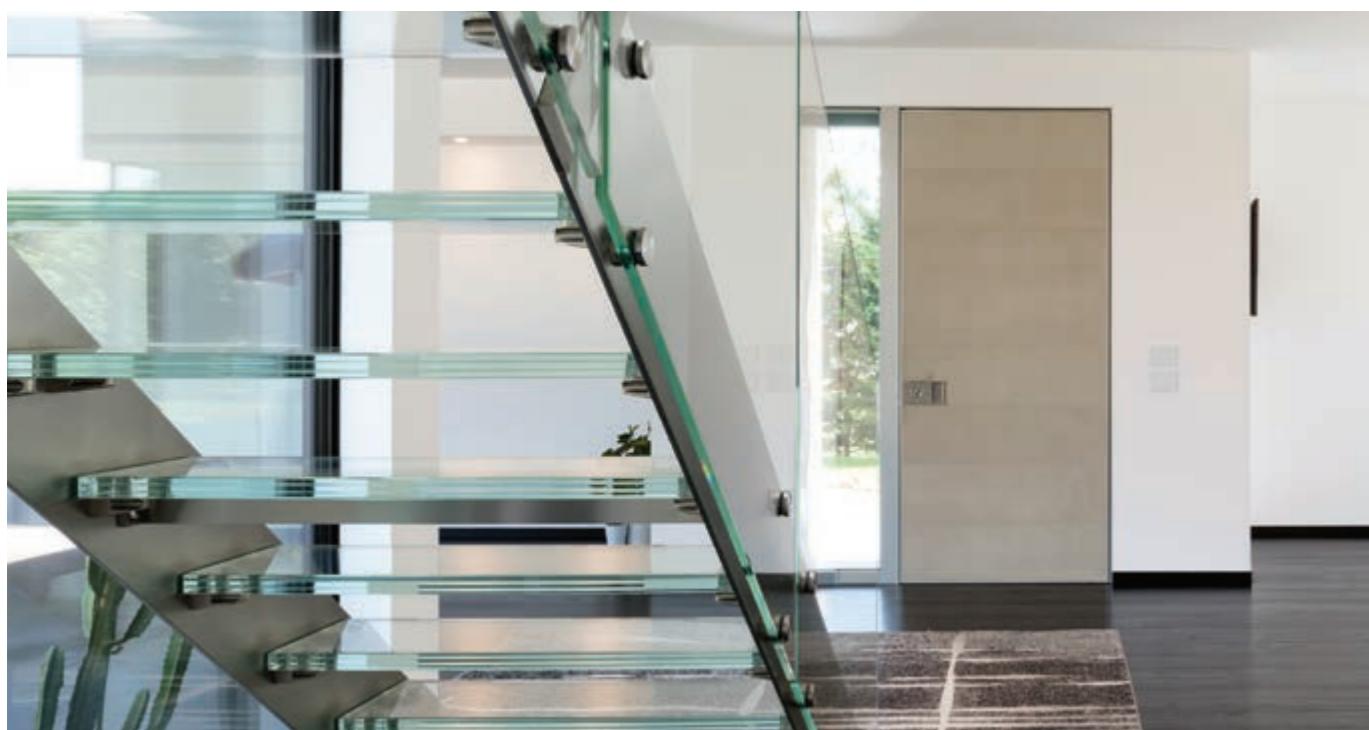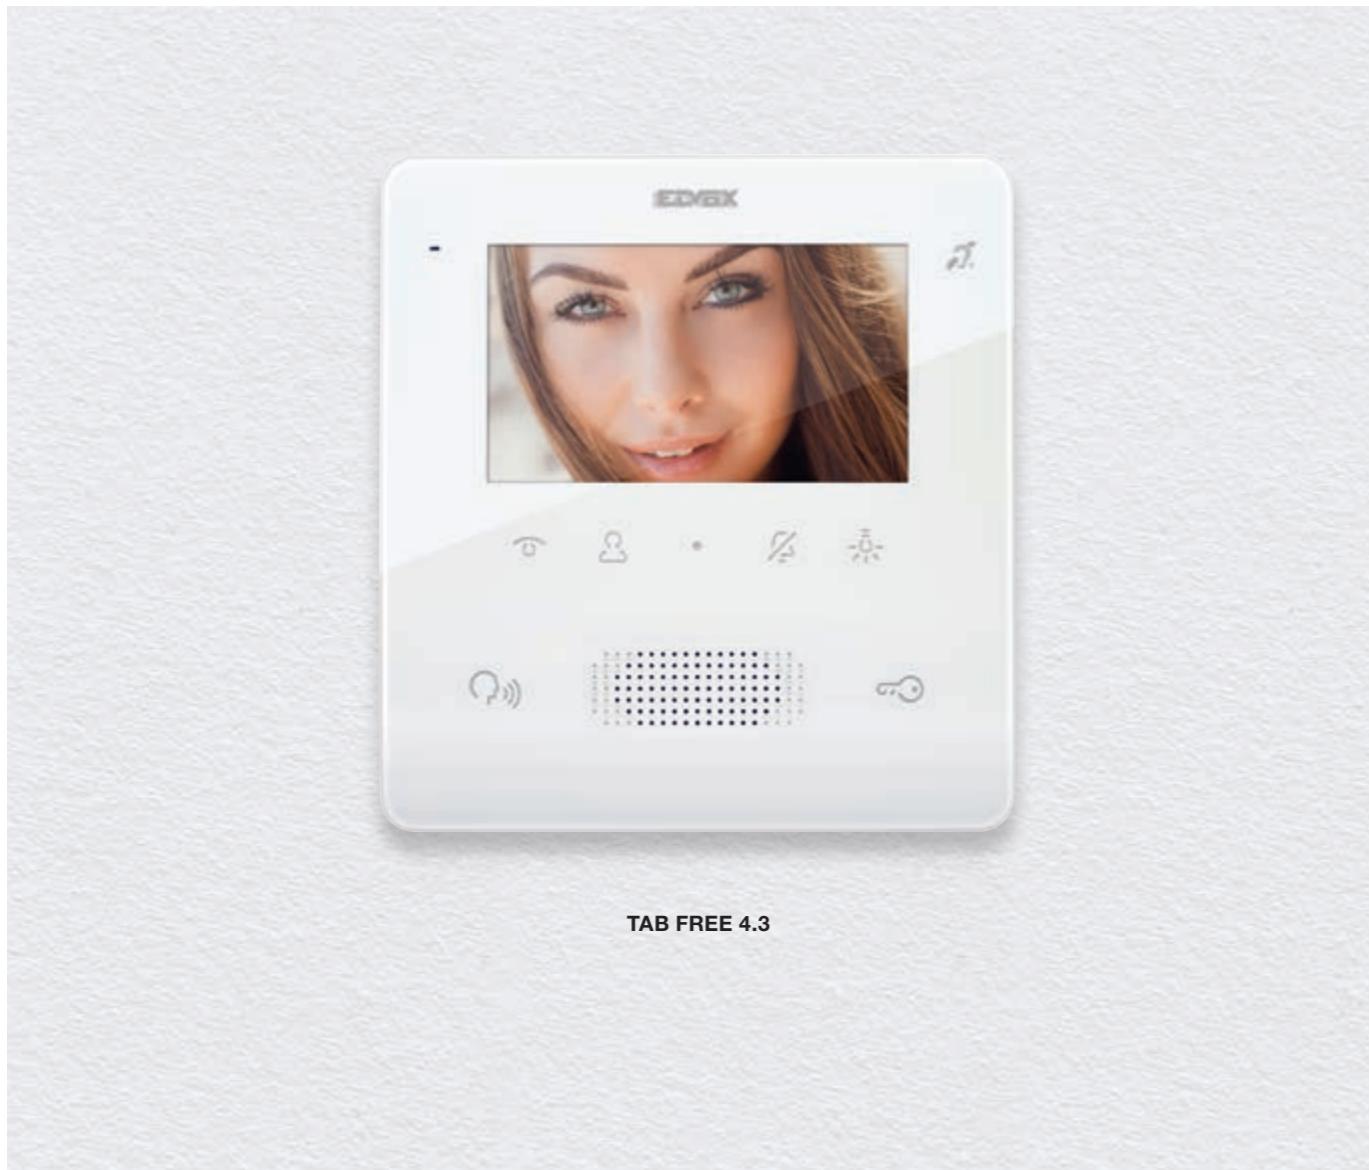

INDOOR STATIONS

Tab Free 4.3.

Compact video entryphone with a stylish silhouette.

Tab Free 4.3 with 4.3" colour display and capacitive keyboard, is designed to communicate with the outside in complete freedom while keeping your hands free and providing a generous view of the world outside your home. A compact, stylish video entryphone supplied of many functions and signalings for the call management. The gentle silhouettes soften the corners and extend across the entire smooth, glass-like surface.

 **OSD scrolling menu.**

The user can easily access the OSD scrolling menu from the display, to customise the video entryphone settings. The installer can also configure the advanced functions of Tab Free 4.3 on the OSD menu.

 **No-nonsense speaker.**

Its generous dimensions stand out on the video entryphone for an audio output as clear and free of disturbance as possible, for perfect, high-quality sound.

 **10 different ringtones.**

10 different default melodies to choose from: simply select your favourite and adjust the volume according to your requirements and the application contexts.

 **Professional firm function.**

Setting this function in Tab Free 4.3 allows the lock to be released automatically following a call from an outdoor station.

 **Pan & Zoom function.**

You can check the recording range of the outdoor station video camera which features the same function from the video entryphone.

 **Alert notification.**

The video entryphone can be used to configure one of the hotkeys on the front so that, when activated, users can send priority requests for support to the porter's lodge.

 **Accessibility.**

Equipped with a teleloop, a solution that also allows hearing aid wearers to use the system and they have tactile aids to facilitate operation of the controls by persons with impaired vision.





TAB 4.3



TAB JR.



INDOOR STATIONS

Tab 4.3 and Tab jr. with handset.

Simplicity at your hands.

With handset, Tab 4.3 with 4.3" display and Tab jr., solutions for every needs. The simplicity of these devices does not condition their purposes because they are equipped of all the video and intercom functions are needed.

4,3" **Tab 4.3 - Colour LCD display.**

The world outside the walls of your home has never been so bright and beautiful. The high-performance colour display that offers a perfect picture of the person at the door.

Tab 4.3 and Tab jr. - Capacitive keyboard.

Keys and controls flush with the surface with backlighting and differential reactivity to avoid accidental activation. The keys grant access to the primary video door entry functions: answering a call, opening the lock, self-start, ringtone mute, auxiliary service activation. Moreover, the answer call and open lock keys are easily recognisable even by the visually impaired.

Tab 4.3 and Tab jr. - Optical and audible signalling.

Crystal-clear sound and visual feedback confirm the activation of the functions, facilitating use for the visually impaired or hearing aid wearers too.

Tab 4.3 and Tab jr. - Accessibility.

Equipped with a teleloop, a solution that also allows hearing aid wearers to use the system and they have tactile aids to facilitate operation of the controls by persons with impaired vision.

Tab 4.3 and Tab jr. - No-nonsense speaker.

Its generous dimensions stand out on the video entryphone for an audio output as clear and free of disturbance as possible, for perfect, high-quality sound.

Tab 4.3 and Tab jr. - 10 different ringtones.

10 different default melodies to choose from: simply select your favourite and adjust the volume according to your requirements and the application contexts.

Tab 4.3 and Tab jr. - Alert notification.

It is possible connecting an external push button to send an assistance request as a priority to the concierge stations.

Tab 4.3 - Pan & Zoom function.

You can check the recording range of the outdoor station video camera which features the same function from the video entryphone.






INDOOR STATIONS

Voxie.

The new line of entryphones.

The Voxie entryphones blend in seamlessly with any architectural context. Simple shapes, slim silhouettes, ergonomic controls and with an elegant matt white finish. For those looking for a striking yet simple appearance and full functionality, which can easily be activated from the push buttons on the device. From adjusting the ringtones and the volume, to the door release button; the alarm indicator and the controls which can be programmed to suit individual requirements. There is even the possibility to make intercom calls if the building has more than one indoor station, such as in service industry facilities like offices, hospitals or production departments in a factory.

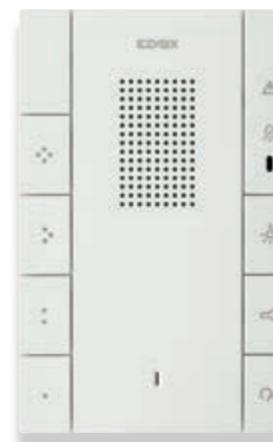**Voxie hands-free.**

Is available for surface mounting with 7 push buttons and teleloop function

**Voxie handset.**

Is available for surface mounting with 2 push buttons (also in a version with teleloop) or 6 push buttons. To choose the functions to suit your individual requirements.

4 programmable push buttons to suit individual daily requirements.

Auxiliary function activation push button, such as switching on the light in the entrance hall.

Lock release command sending. Thanks to the white signalling LED, in the Voxie Hands-free, if a sensor has been installed at the gate or at the main door, the door open is signalled.

Hands-free Push button. To start and end the conversation, with white LED signalling that the conversation is under way.

Automatic answer. Where activated, this function allows you to talk to the caller automatically without touching the entryphone.

One-way public paging. The Paging function allows a group of indoor stations to ring and to make a one-way public paging on the speaker of the Voxie hands-free entryphone.

Audio volume and ringtone adjustment functions, also adjustable during a conversation.

Programmable melodies that can be differentiated for calls from an outdoor station, landing calls and intercom calls, depending on the models.

Alarm condition signalling, thanks to the red LED.

Index

Elvox Door entry

Guide to choosing outdoor stations and indoor stations	40
 Due Fili Plus technology	44
 IP technology	104
 SIP technology	136
 Sound System technology	146
Other kits:	
- IP over 2 wires kits	156
- Stand alone video entry kits	160

Guide to choosing - Outdoor stations

Video entryphone and entryphone panels

TYPE	MONOBLOC	MODULAR			FLAT	MONOBLOC		
		ROXIE	PIXEL	PIXEL HEAVY		PIXEL UP	1300	1200
SERIES								
CALL TYPE	Push buttons	Push buttons	Alphanumeric with electronic contacts list	Push buttons	Alphanumeric with electronic contact list	Alphanumeric with electronic contacts list	Push buttons	Alphanumeric with electronic contact list
TECHNOLOGY:								
AUDIO/VIDEO								
AUDIO								
INSTALLATION	Recess/surface mounting	Recess/surface mounting	Recess/surface mounting	Recess/surface mounting	Recess/surface mounting	Recess/surface mounting	Recess/surface mounting	Recess/surface mounting
NUMBER OF CALLS	1, 2 and 4	Buttons along 1 row from 1 to 42	from 1 to N (IP and SIP)	Buttons along 1 row from 1 to 42	from 1 to N (IP and SIP)	from 1 to N (IP and SIP)	Buttons along 1 row from 1 to 6400	from 1 to 6400
COLOUR/CAMERA	✓ (with wide-angle lens)	✓ (with wide-angle lens)	✓ (with wide-angle lens)	✓ (with wide-angle lens)	✓ (with wide-angle lens)	✓ (with wide-angle lens)	✓	✓
TELELOOP		✓		✓	✓			
AUTOMATIC VOLUME CONTROL		✓		✓	✓			
ECHO CANCELLER		✓		✓	✓			
ACCESS CONTROL	View Key App/ Digital key tag/ Transponder card	Module+ card	Module+card/ from keypad		From keypad	Module+card/ from keypad	From keypad	From keypad
COLOUR/FINISH	Grey	Grey Slate grey White Anodised grey	Sable grey	Stainless steel	Electro-polished anodised aluminium	Stainless steel with embossing		
ACCESSORIES FOR INSTALLATION	Rainproof frame/ Frame for semi-flush mounting	Rainproof frame/ Surface mounting box with rain-proof frame		Surface mounting box with rain-proof frame	Rainproof frame/ Surface mounting box with rain-proof frame	Rainproof frame/ Surface mounting box with rain-proof frame		
PROTECTION DEGREE IK / IP	IK08 / IP54	IK08 / IP54	IK10 / IP54	IK08 / IP54	IK07 / IP54	IK10 / IP54		

* For systems with over 20 calls, please contact the sales network for advice regarding structure and additional system components.

Guide to choosing - Outdoor stations

MONOBLOC	MODULAR	FLAT		MONOBLOC	OTHER	
1200 REINFORCED	8000	PATAVIA	STEELY	1300/E	POST BOX	LETTERBOX ENTRANCE PANEL 2550
Push buttons	Alphanumeric with electronic contact list	Push buttons	Alphanumeric with electronic contact list	Push buttons	Alphanumeric with electronic contact list	Push buttons
Flush mounting	Recess/surface mounting	Flush mounting	Flush mounting	Recess/surface mounting	Flush mounting	Recess/surface mounting
from 1 to 28	from 1 to 6400	from 1 to 43	from 1 to 6400	from 1 to 36	from 1 to 6400	from 1 to 2
✓	✓	✓	✓	✓	✓	✓
	From keypad	From keypad	From keypad	From keypad	From keypad	
Sable grey	RAL 7035 grey	Satin finish brass Polished brass	Stainless steel	Electro-polished anodised aluminium	Sable grey	Natural anodised aluminium
	Rainproof frame/ Surface mounting box with rain-proof frame					Integrated rain-proof frame
IK10 / IP54		IK08 / IP54	IK07 / IP54	IK08 / IP54	IK07 / IP54	

Video entryphones

SERIES	TAB 7S UP		TAB 7S	TAB 7
	 7" display	 7" display	 7" display	7" display
TECHNOLOGY				 
FLUSH MOUNTING				
SEMI-FLUSH	40517+40591	40517.04+40591		
SURFACE MOUNTING	40517 (with Vimar flush mounting box V71701 or V71303 or V71703 or V71318 or V71718)	40517.04 (with Vimar flush mounting box V71701 or V71303 or V71703 or V71318 or V71718)	40607 (with Vimar flush mounting box V71701 or V71303 or V71703 or V71318 or V71718)	40605 (IP) 40505 (Due Fili Plus) (with Vimar flush mounting box V71701 or V71303 or V71703 or V71318 or V71718)
TABLE	40517+40596	40517.04+40596	40607+40195	40605+40195 (IP) 40505+40195 (Due Fili Plus)
COLOUR	White	Black	White	White



Vimar View App available in the Apple and Google Play stores.

Vimar View

Entryphones

SERIES	TAB JR.	VOXIE		
				
TECHNOLOGY				
FLUSH MOUNTING				
SURFACE MOUNTING	7509 7509/D	40540	40542	40547
TABLE	7509+753A+753B 7509/D+753A+753B	40540+40598	40542+40598	40547+40598
COLOUR	White	White	White	White

SERIES	TAB 5S UP		TAB FREE 4.3	TAB 4.3
	 5" display	 5" display	4.3" display	4.3" display
TECHNOLOGY				
FLUSH MOUNTING				
SEMI-FLUSH	40515+40590	40515.04+40590		
SURFACE MOUNTING	40515 (with Vimar flush mounting box V71701 or V71303 or V71703 or V71318 or V71718)	40515.04 (with Vimar flush mounting box V71701 or V71303 or V71703 or V71318 or V71718)	7559 7558 (with Vimar flush mounting box V71701 or V71303 or V71703 or V71318 or V71718)	7549 7548 (with Vimar flush mounting box V71701 or V71303 or V71703)
TABLE	40515+40595	40515.04+40595	7559+753A+753B 7558+753A+753B	7549+753A+753B 7548+753A+753B
COLOUR	White	Black	White	White



Due Fili Plus technology, quick and flexible.

Due Fili Plus technology is used to create high-performing video door entry and door entry communication systems in all types of building, whether new builds or refurbishments, in the simplest possible way. Due Fili Plus technology guarantees faultless connections between all devices used for receiving and transmitting power, audio/video and data signals.



Up to 6400 indoor stations.

Systems can be created to manage up to a maximum of **484 outdoor stations** and up to **6,400 indoor stations**. With the **expansion interface**, you can expand the system by replicating several Due Fili Plus systems with up to **32 blocks** and **128 reception video-switchboards**.

Up to 1200 metres.

Due Fili Plus technology can be used to create extended systems, with a distance between the indoor station and outdoor station of up to **1,200 metres, without losing any audio or video signal quality**. The signal is carried along a single, small-diameter twisted-pair cable.

Simple configuration.

Programming is really simple. The installer can programme the outdoor station directly from the indoor station. Once the indoor station has been encoded, the system can even simulate an audio/video call from the outdoor station, to check whether installation was successful straight away.

Scenario activation.

The **Tab 7S Up** and **Tab 5S Up** hands-free video entryphone systems have been integrated with new functions used to **activate scenarios in the View Wireless connected system**, thanks to rapid buttons on the front and the video entryphone menu. The scenarios you previously created and configured with the **Vimar View** App are imported into the video entryphones via the Vimar cloud. The update is also available for the Tab 5S Up and Tab 7S Up video door entry systems already installed and connected to the Internet.

Remote management by smartphone and tablet.

The restyled **Vimar View** App enables remote video door entry system management via smartphone and tablet in combination with the **Tab 7S Up** and **Tab 5S Up** video door entry indoor stations. It allows you to receive a video entryphone call, see the video surveillance cameras or open your door wherever you are. What's more, it allows you to manage up to **10 mobile devices** and up to **5 different systems**.



Professionalism guaranteed.

Our professional, technologically sophisticated products are designed to guarantee superior performance and durability. Famed for their top quality, they are **guaranteed for three years**, a whole year more than the legal requirements.

Solutions for any building.

Our video door entry system solutions adapt to the most diverse application environments. Versatility and scalability, combined with sophisticated technology and ease of use make our products suitable for the smallest apartment to large shopping centres and executive compounds, through to large industrial estates.


For renewing an existing or creating a new system it is necessary to define the type of system, to identify the various components required.

Audio-only system (Due Fili Plus).


Basic system components:

- Entrance panel.
- Power supply and indoor unit (audio).
- In "audio-only" system, the wiring of the devices (entrance panel, indoor unit, power supply unit, etc.) is linear (in-out) or star-wiring.

With single entrance panel.

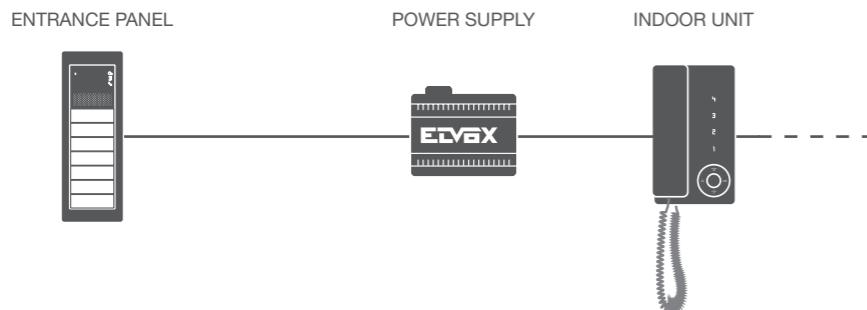

With multiple entrance panels.

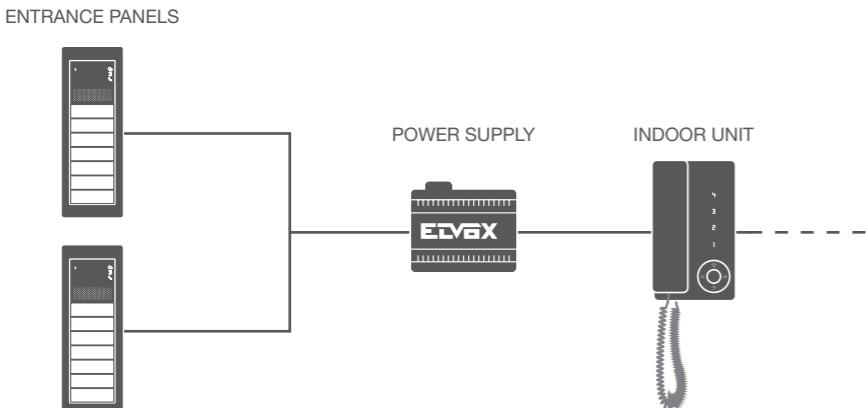

Mixed systems (Due Fili Plus).

Basic system components:


- Entrance panel.
- Power supply and indoor units (audio + video).
- Linear wiring (in-out, no additional device needed).

In mixed systems (audio+video), for solutions with multiple audio and video external units, the concentrator is required.


In the case of indoor units, on the other hand, installations may use:

- Linear wiring (in-out, no additional device needed).
- Concentrator (combines multiple inputs).
- Wiring with floor distributor, allowing 4 outputs to be taken off the riser.


With single entrance panel.

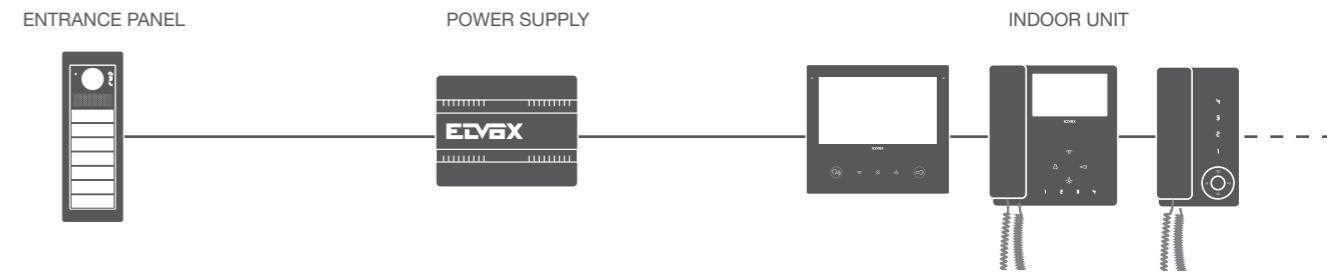

With more than one entrance panel and in-out wiring.

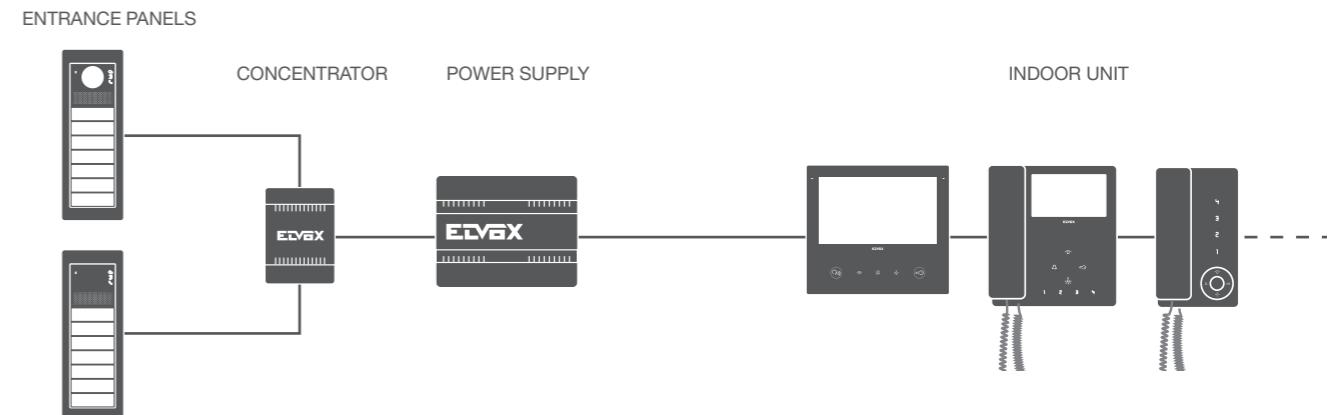

With more than one entrance panel and floor distributor.

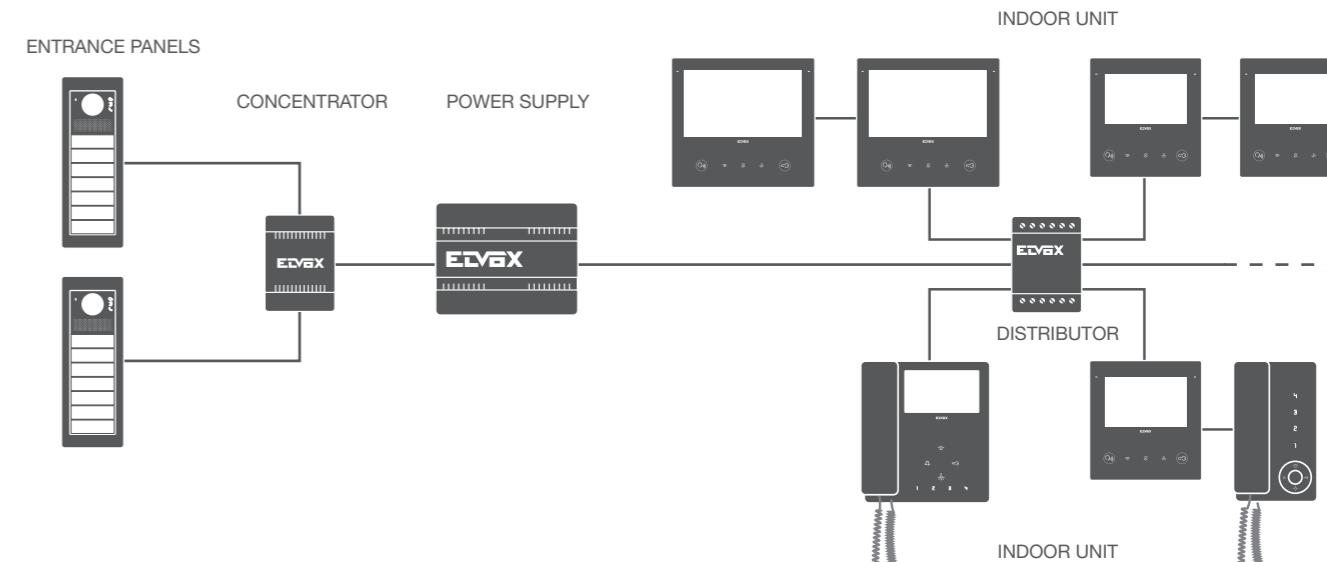

Due Fili Plus - Examples of standard systems

When set up a new systems or updating existing systems, the system type must be defined in order to identify the various components required. The components for each type of system can be fitted within certain distances, as follows:

- system components:

- maximum distance between the indoor unit and the furthest entrance panel;
- maximum distance between the entrance panel and the power supply;

- type and length of the cable.

The diagrams below show various system types, each indicating the relevant thresholds to be observed.


Type of cable

CABLE	ARTICLE	UNDERGROUND	AUDIO SYSTEMS	MIXED SYSTEMS
Elvox - section 1 mm ²	732I.E.100, 732I.E.500	Yes	Recommended	Recommended
Elvox - section 1 mm ²	732H.E.100, 732H.E.500	No	Recommended	Recommended
Cat.5/6		No	Yes	Yes
Twisted phone 0.28 mm ²		No	Yes	Yes
Single > 0.2 mm ² *		No	Yes	Yes

* also refers to cables for alarm systems


Due Fili Plus - Examples of standard systems

Basic video door entry system.

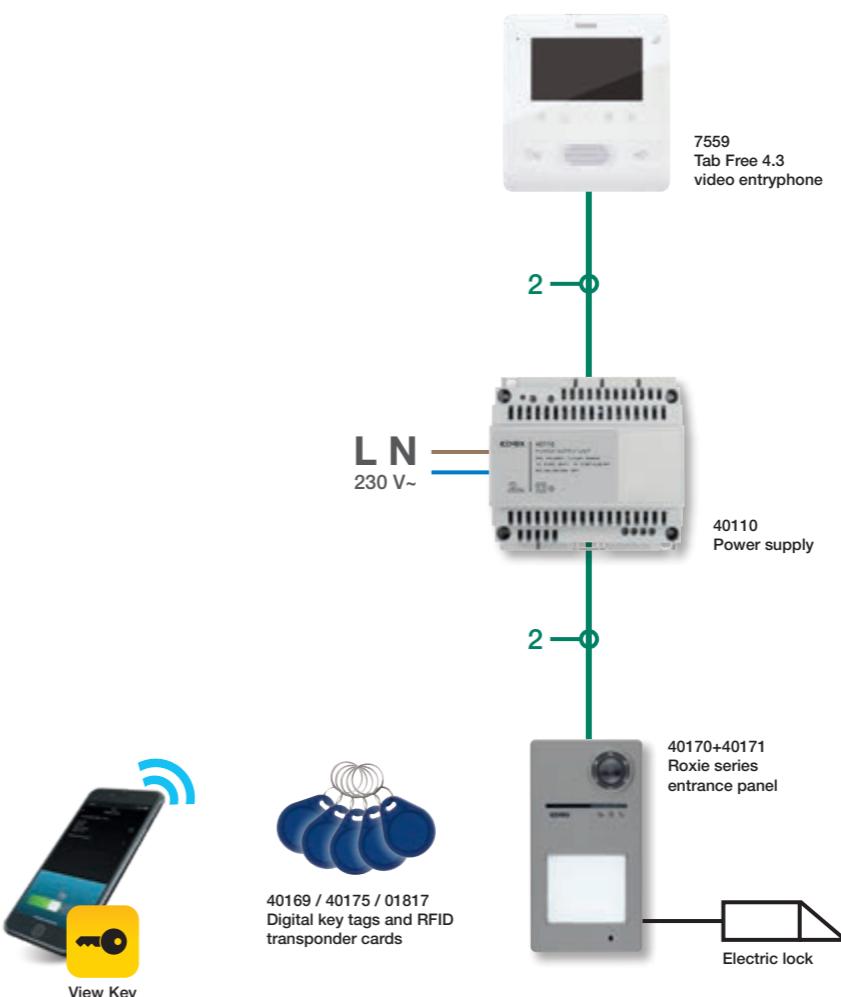



Note: for further information (cables, distance between devices, configuration, etc.), refer to the Due Fili Plus video door entry system technical book available on the web site.

Villa with video door entry system.


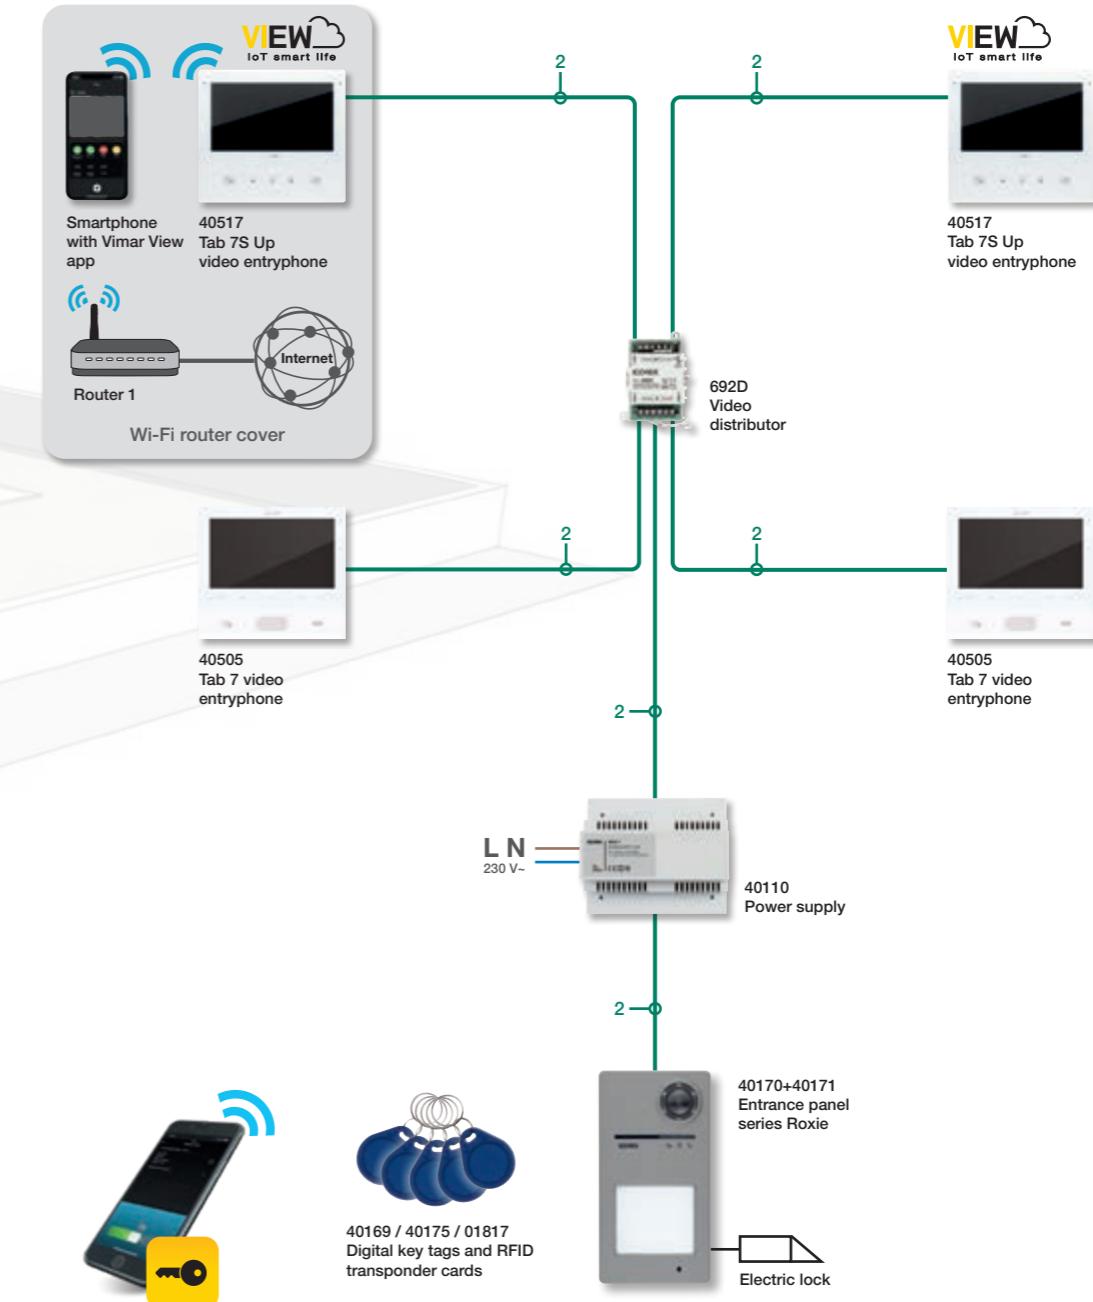


Note: for further information (cables, distance between devices, configuration, etc.), refer to the Due Fili Plus video door entry system technical book available on the web site.

Villa with video door entry system and extended cable runs, through the cable riser amplifier.

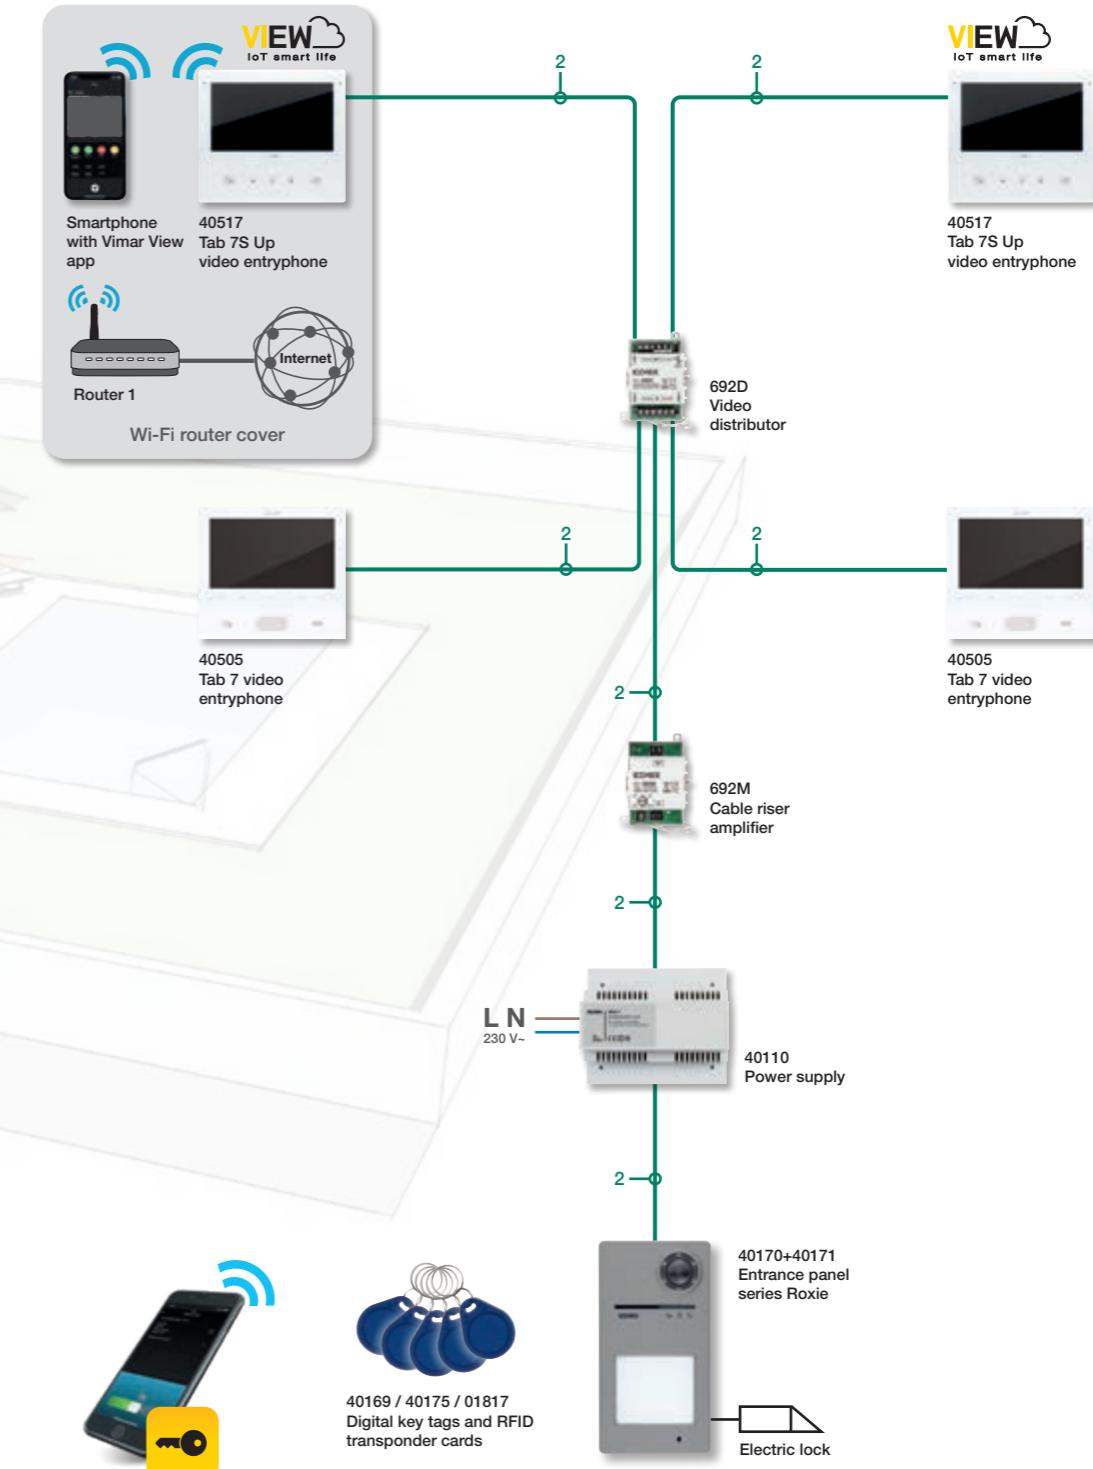
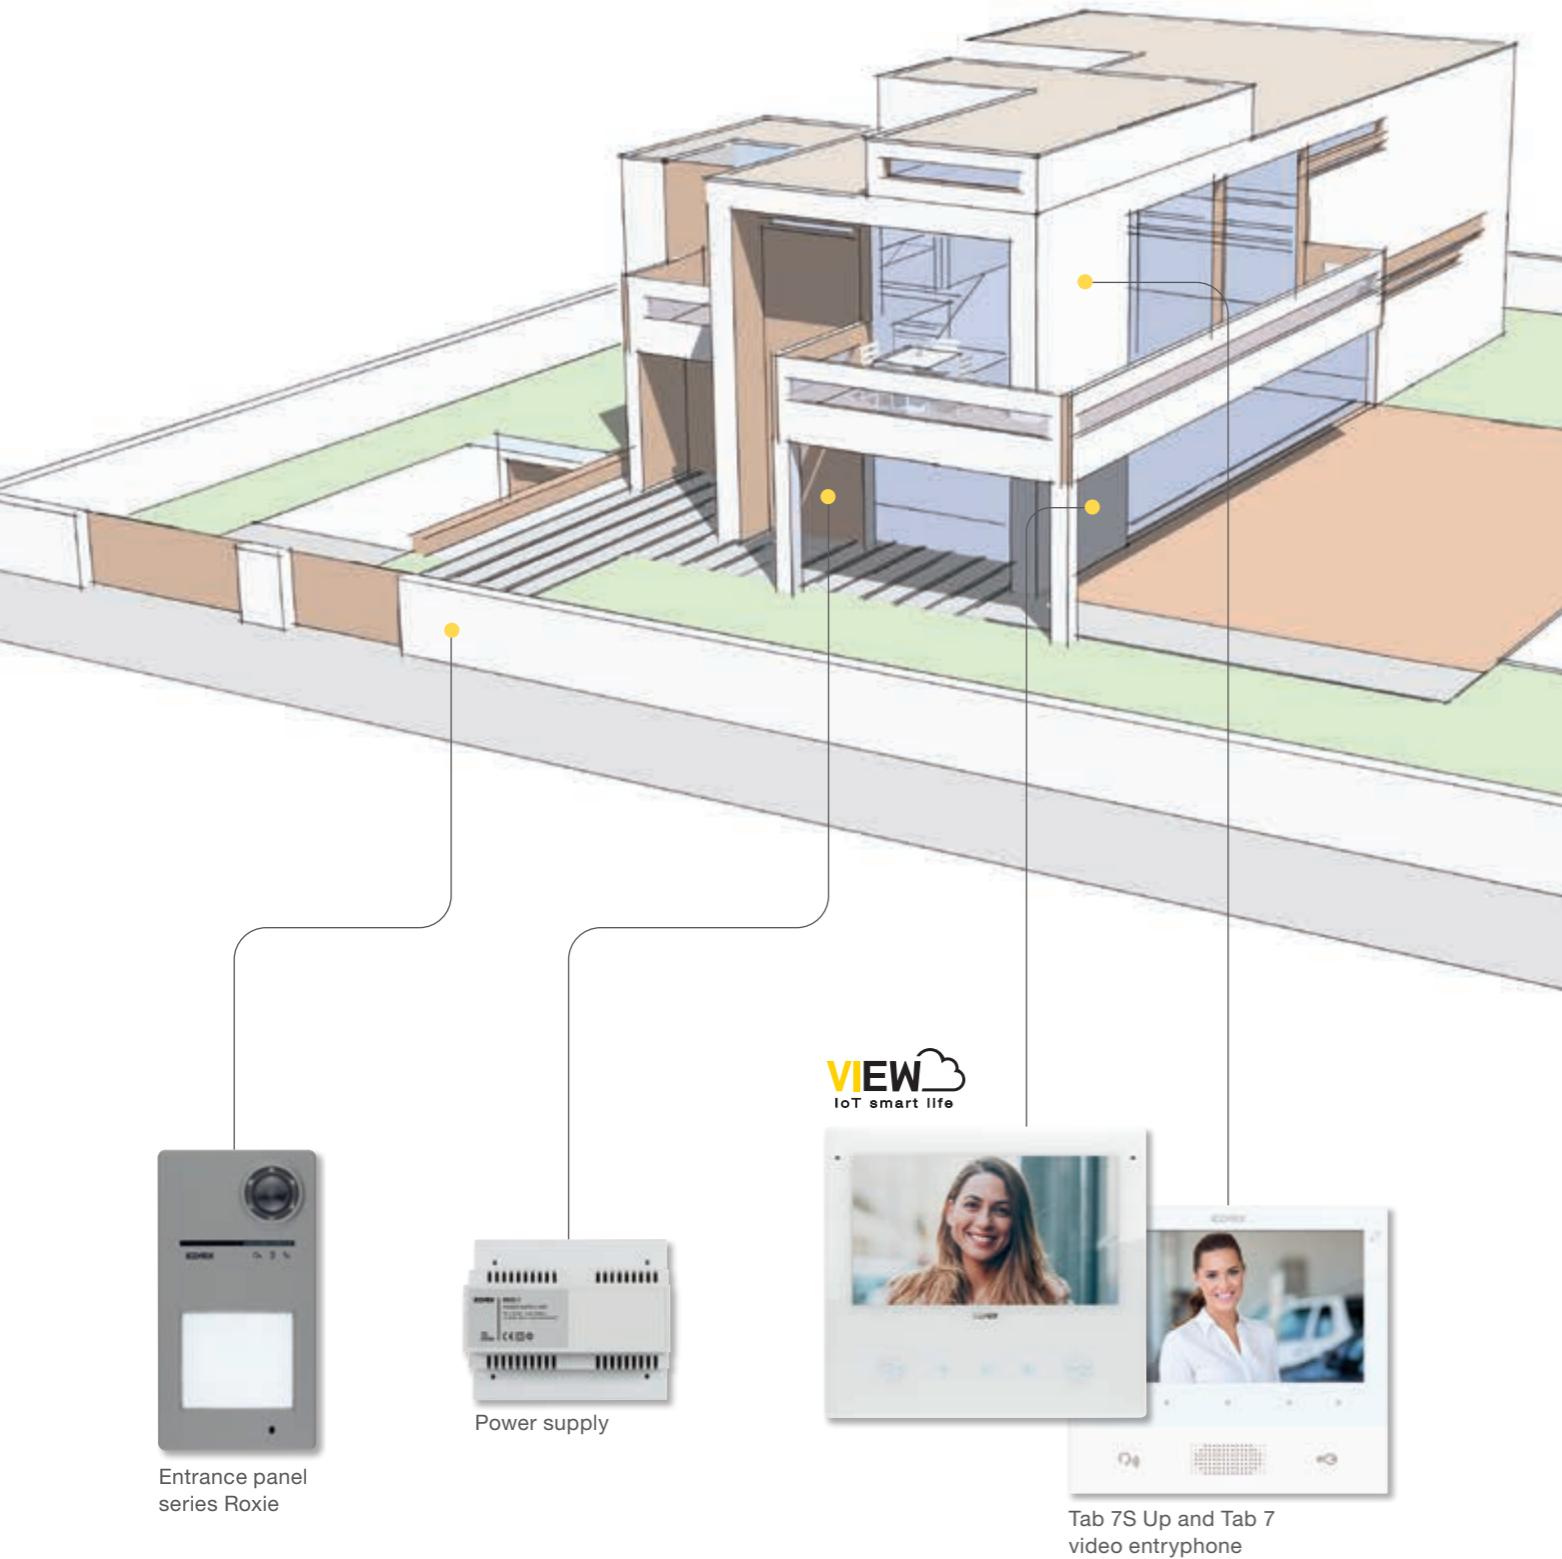


Note: for further information (cables, distance between devices, configuration, etc.), refer to the Due Fili Plus video door entry system technical book available on the web site.

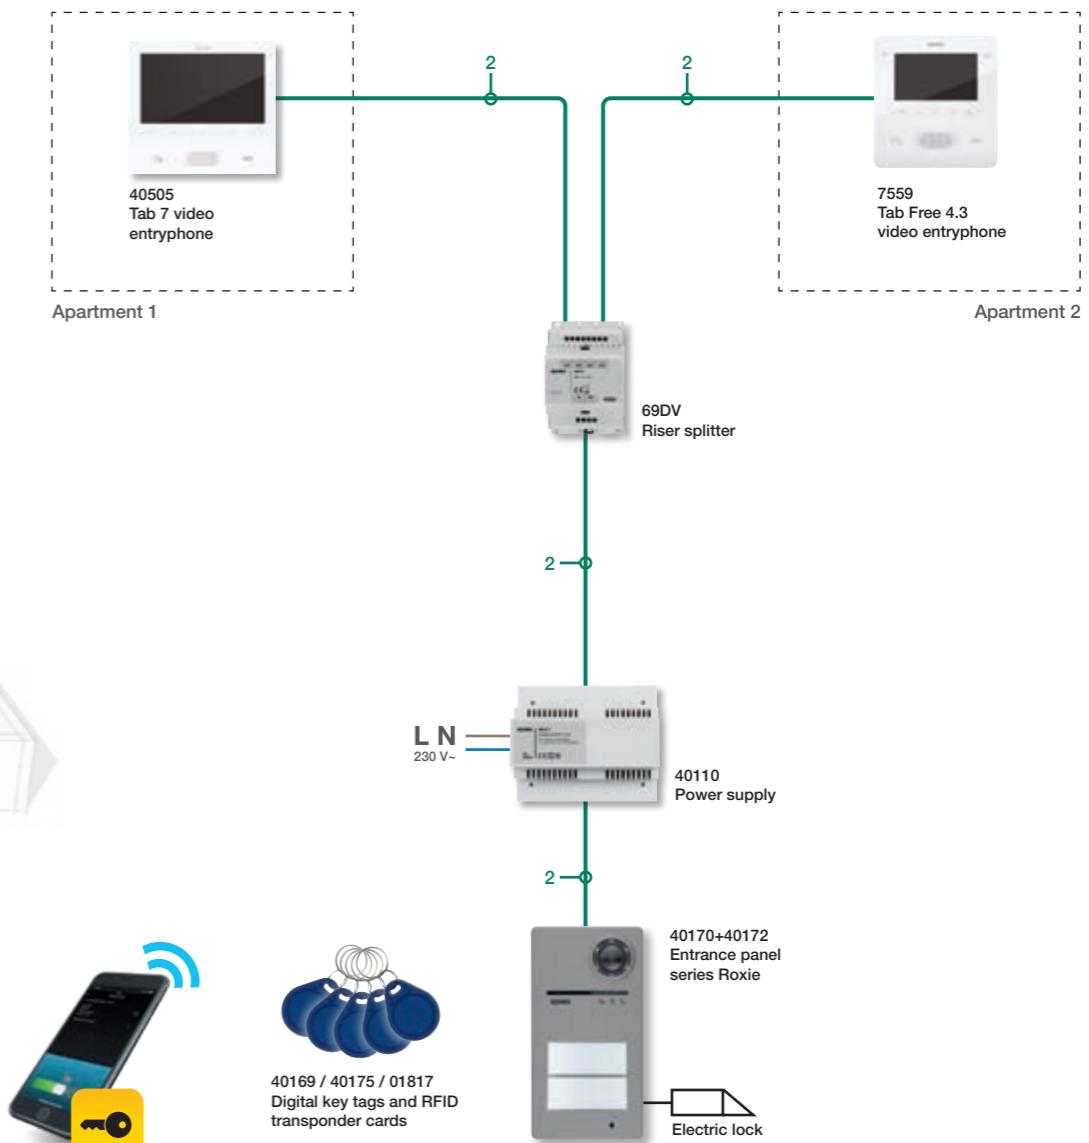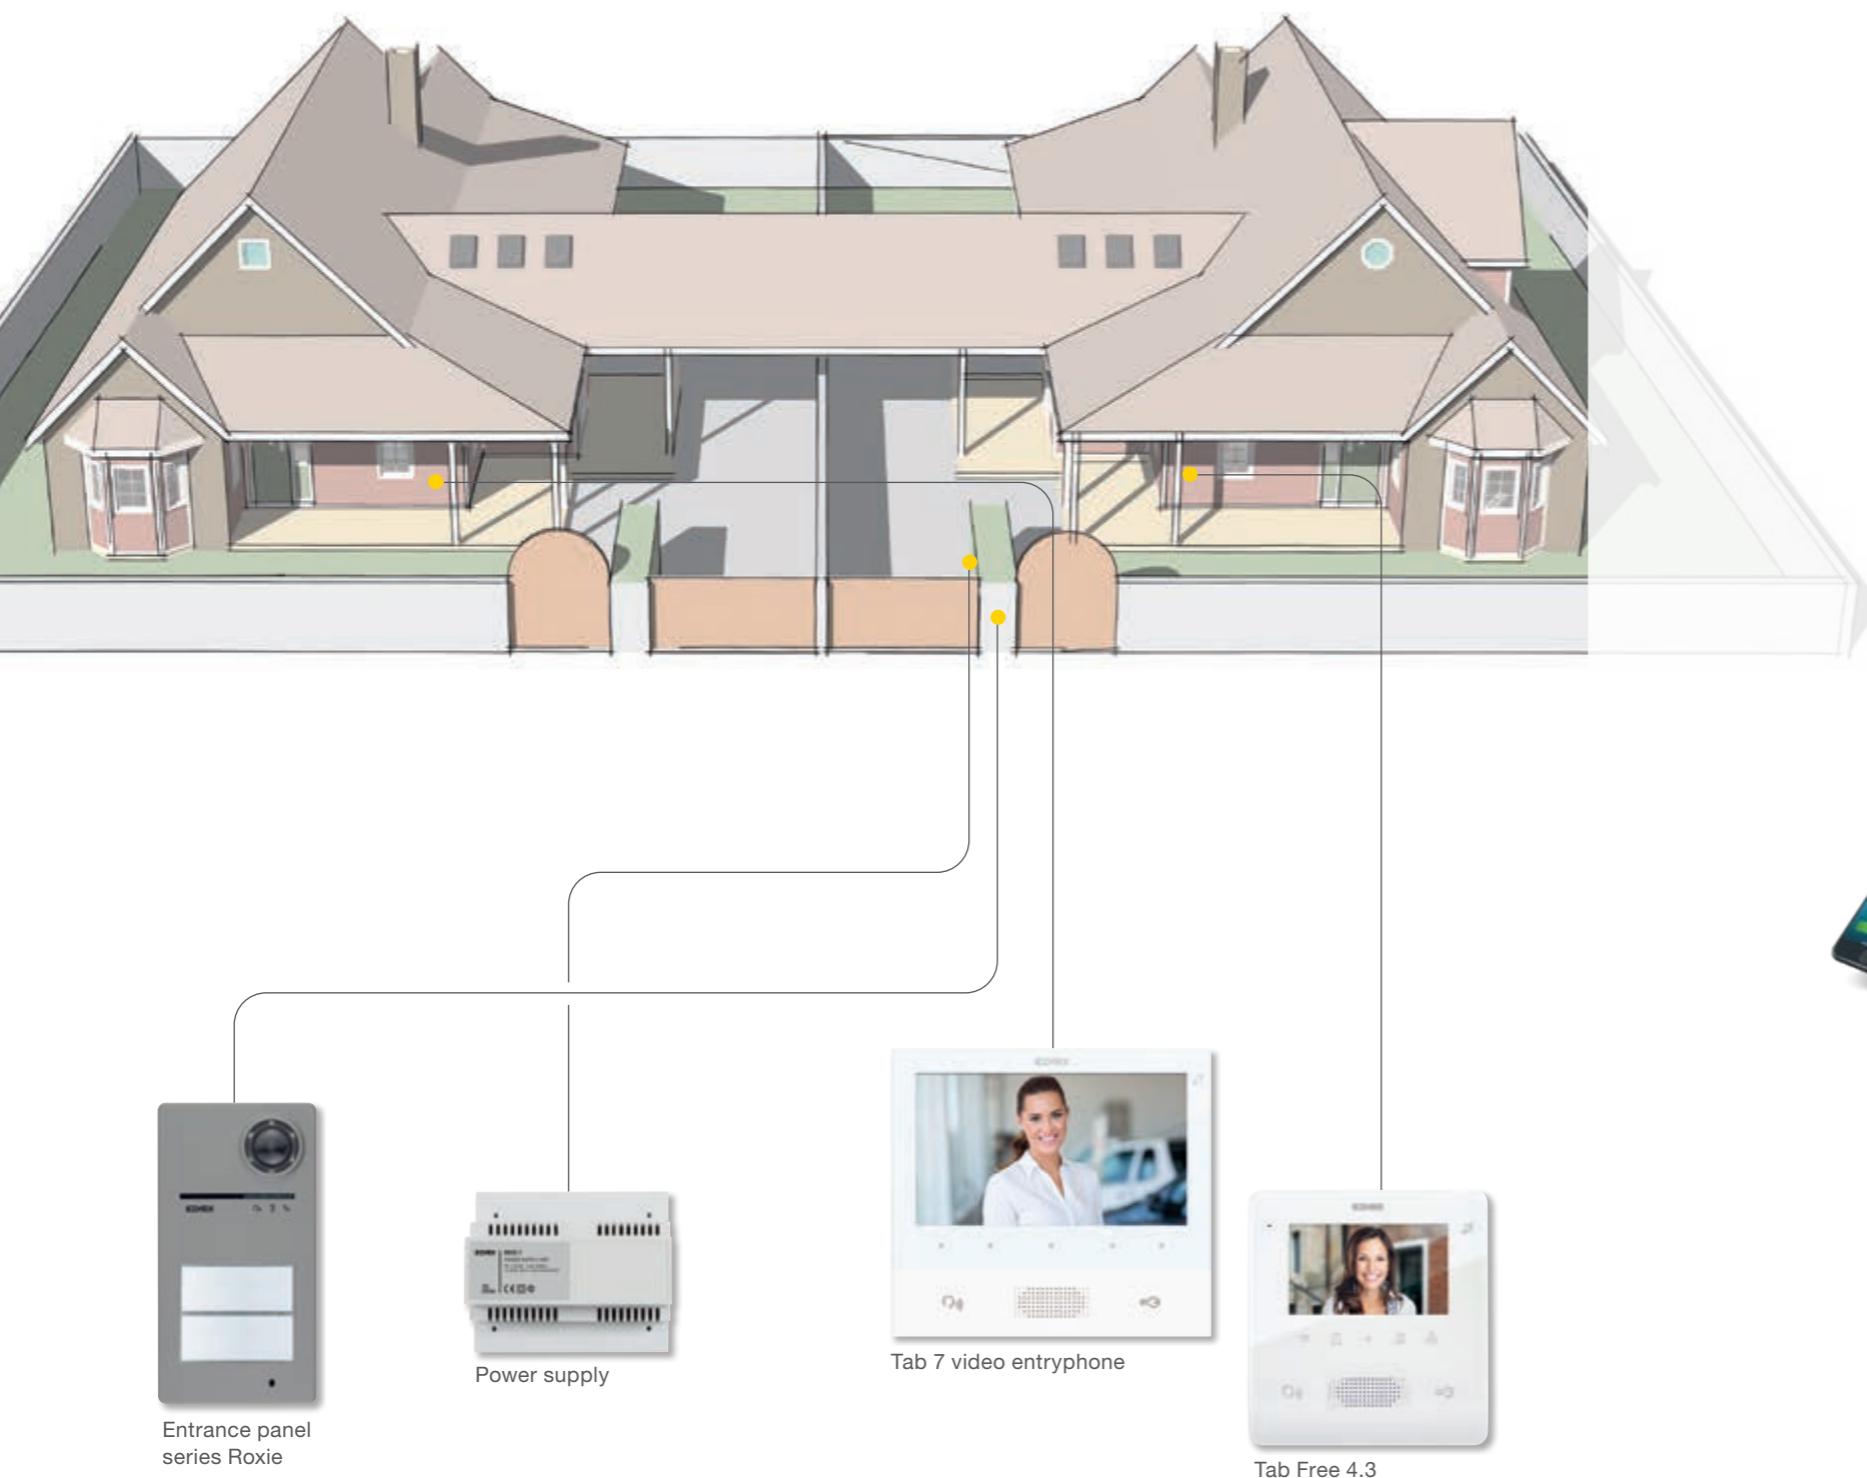




Note: for further information (cables, distance between devices, configuration, etc.), refer to the Due Fili Plus video door entry system technical book available on the web site.

Semi-detached villa with video door entry system and extended cable runs, through the cable riser amplifier.

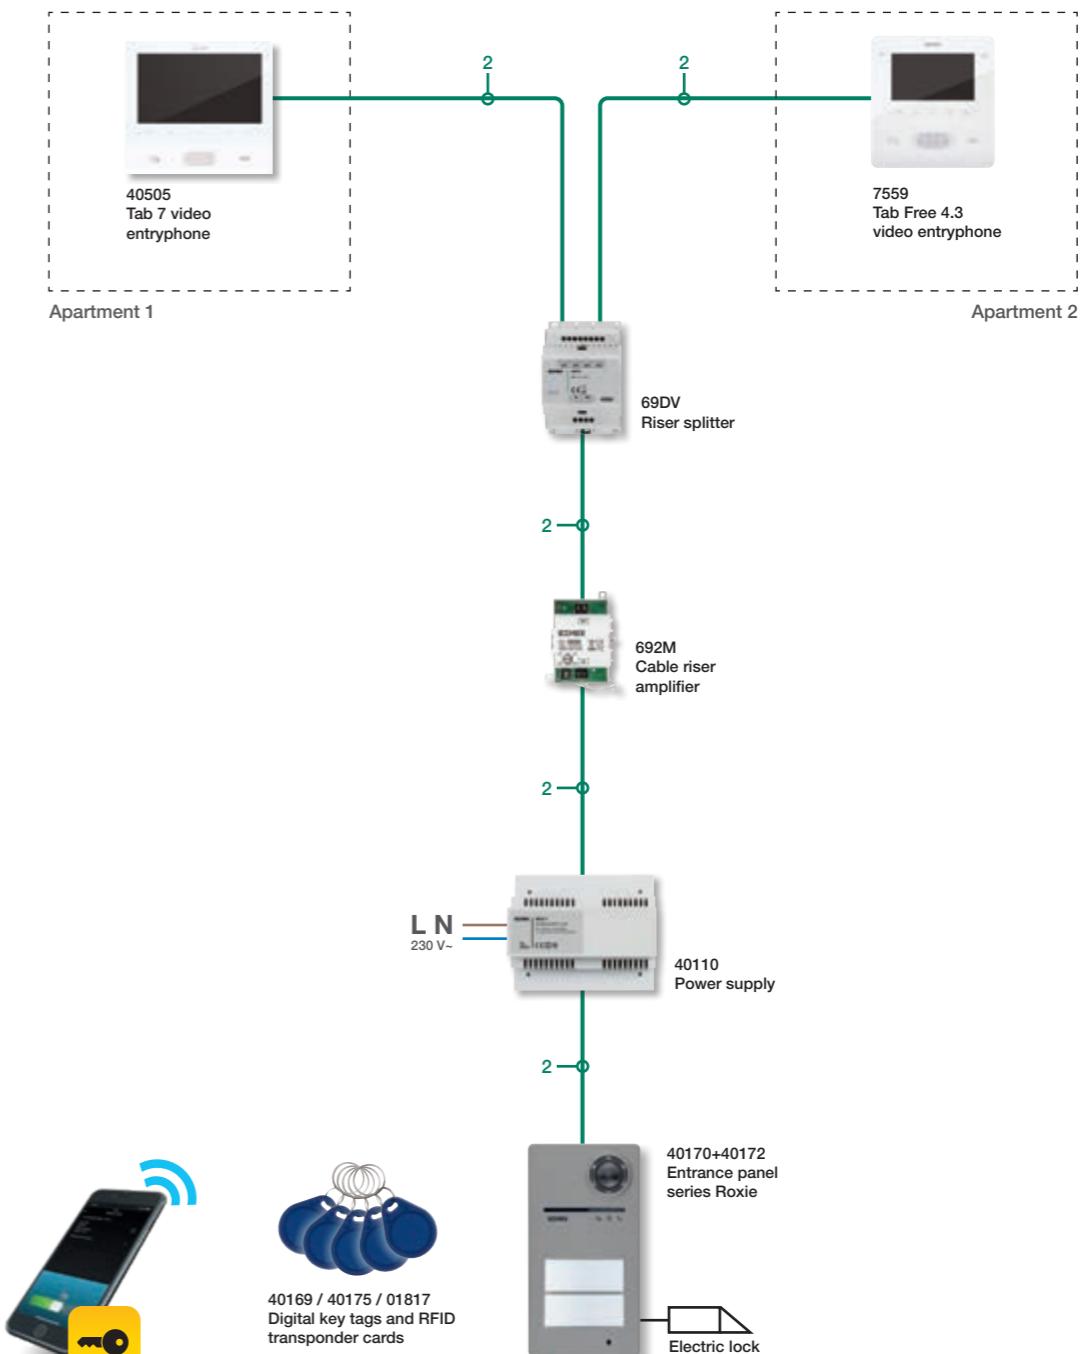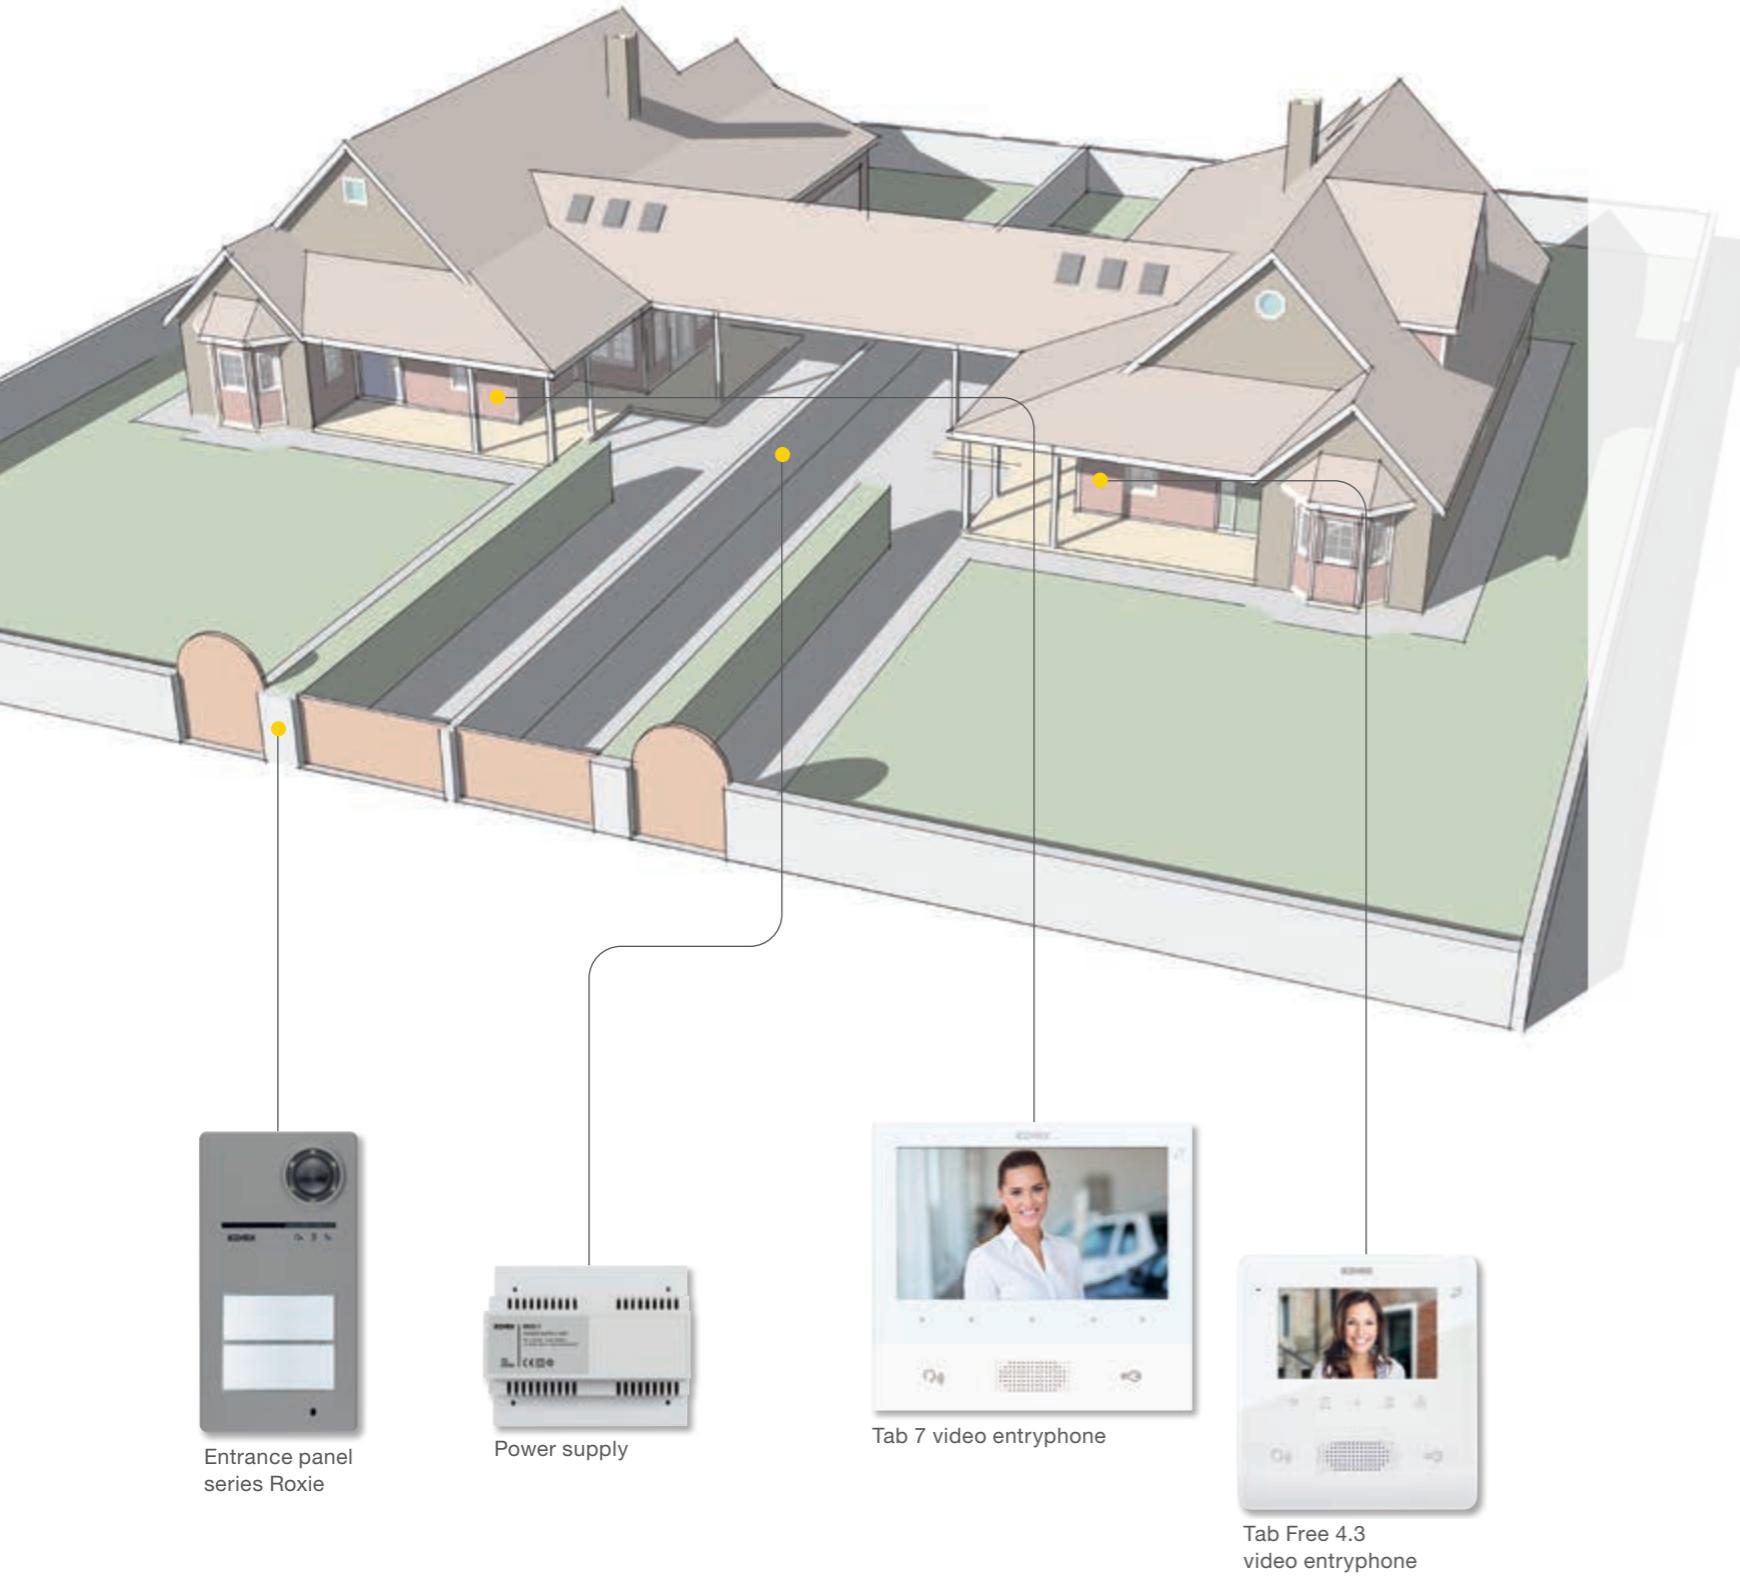


Note: for further information (cables, distance between devices, configuration, etc.), refer to the Due Fili Plus video door entry system technical book available on the web site.

Four-family villa with video door entry system.

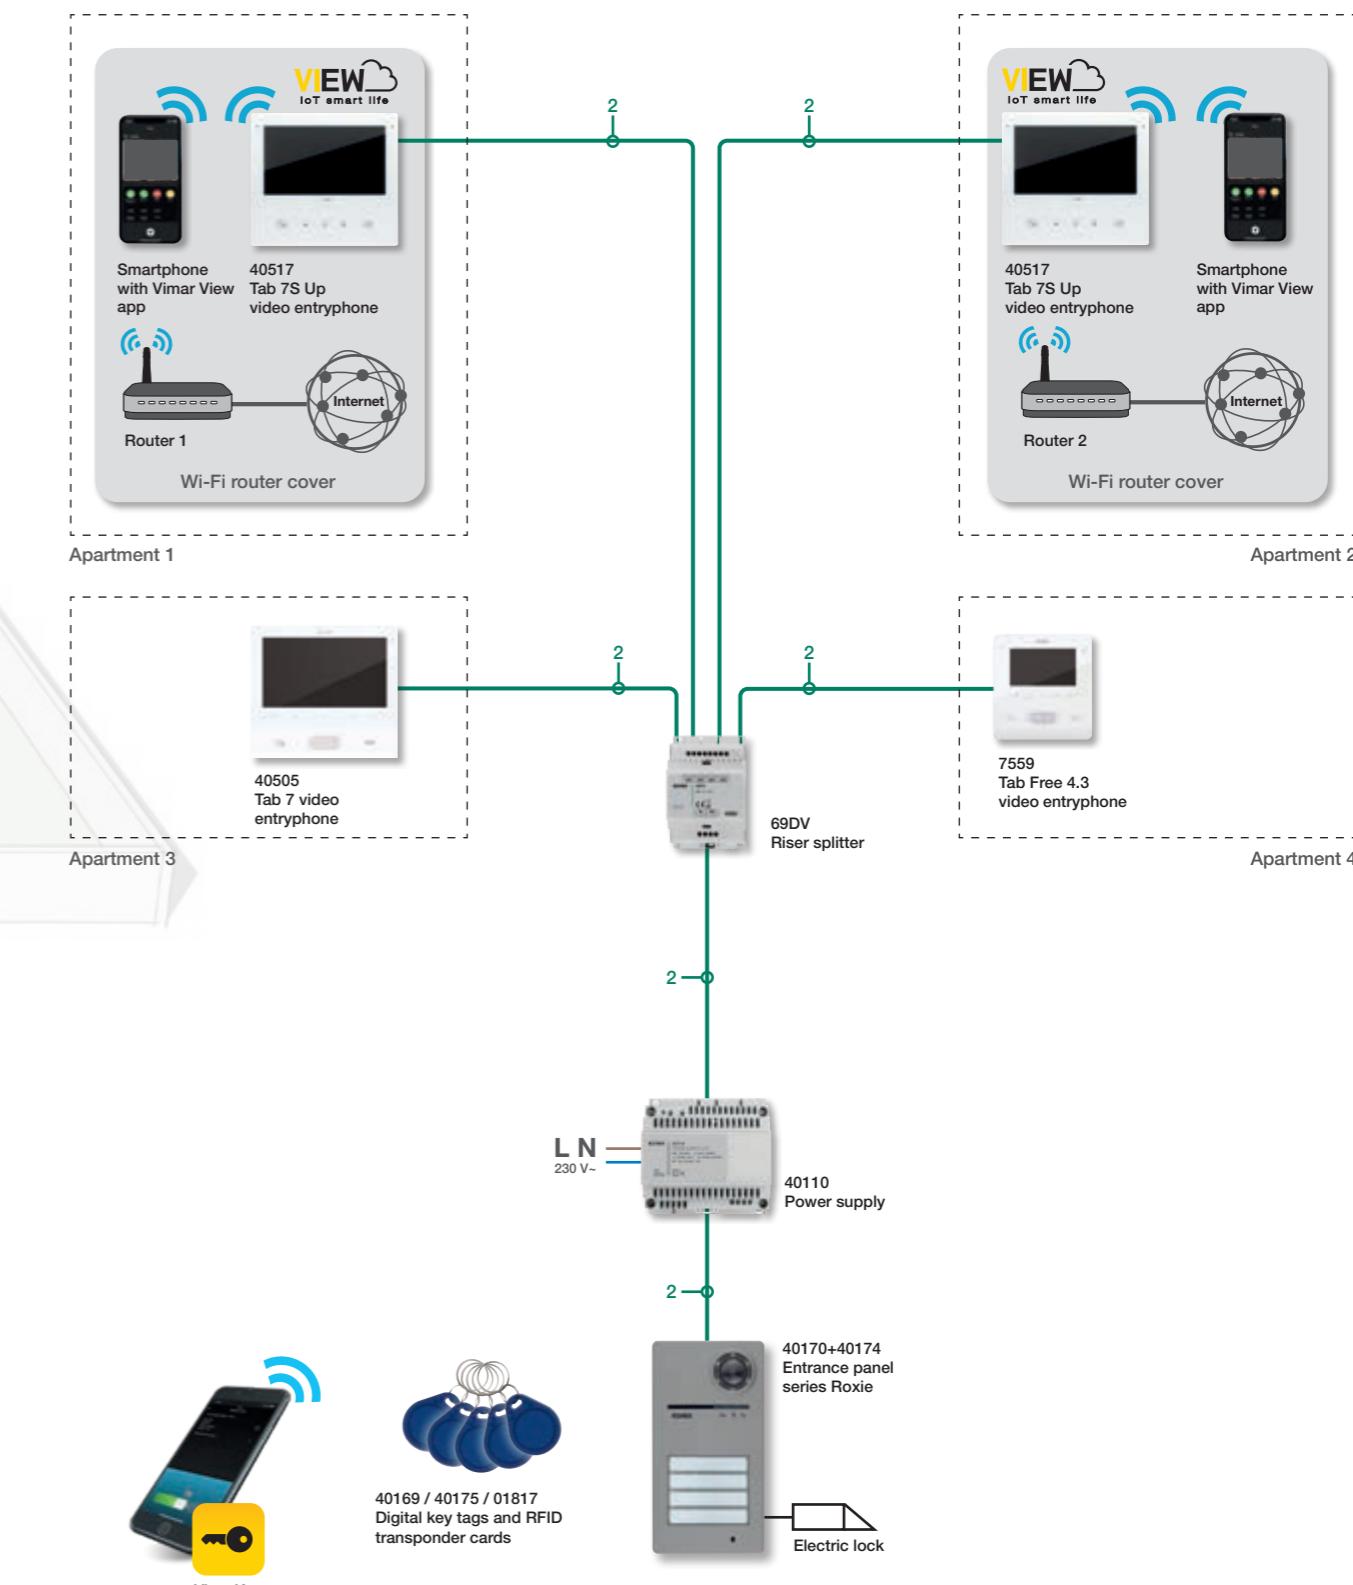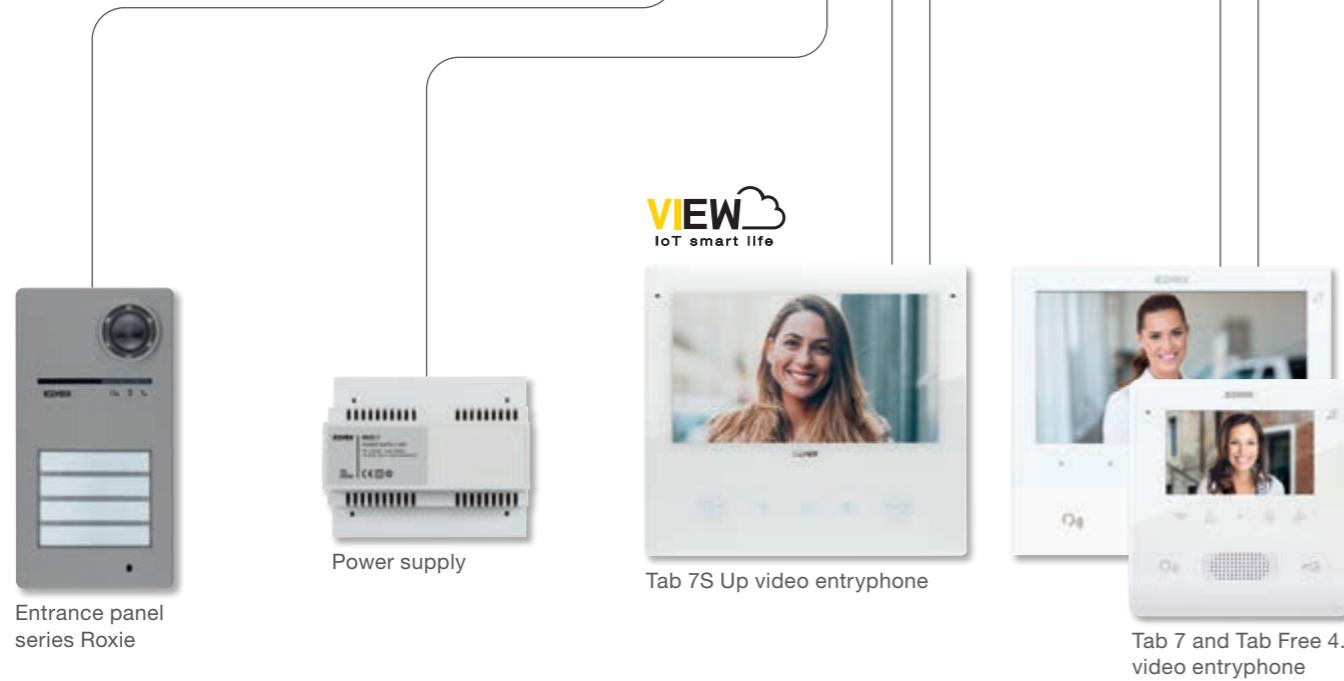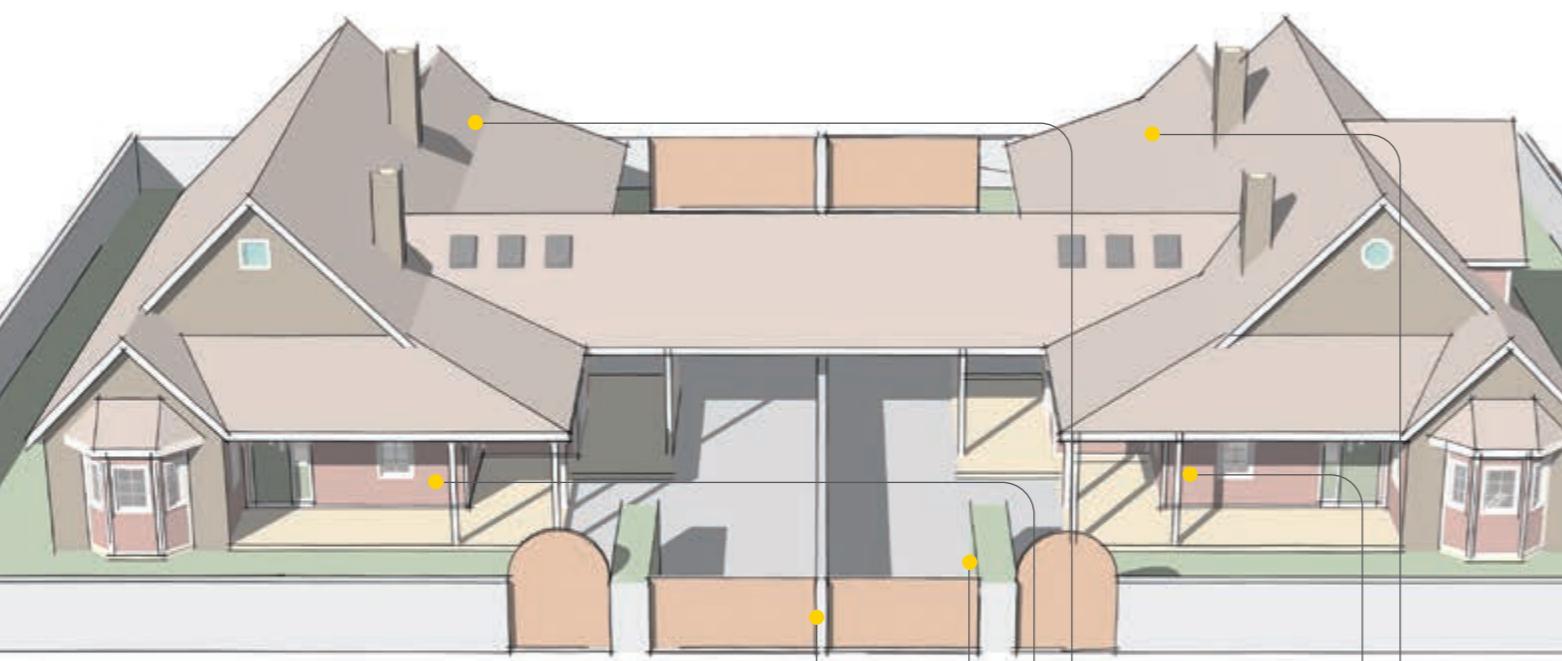

Note: for further information (cables, distance between devices, configuration, etc.), refer to the Due Fili Plus video door entry system technical book available on the web site.

Apartment block with video door entry system serving up to 8 indoor units

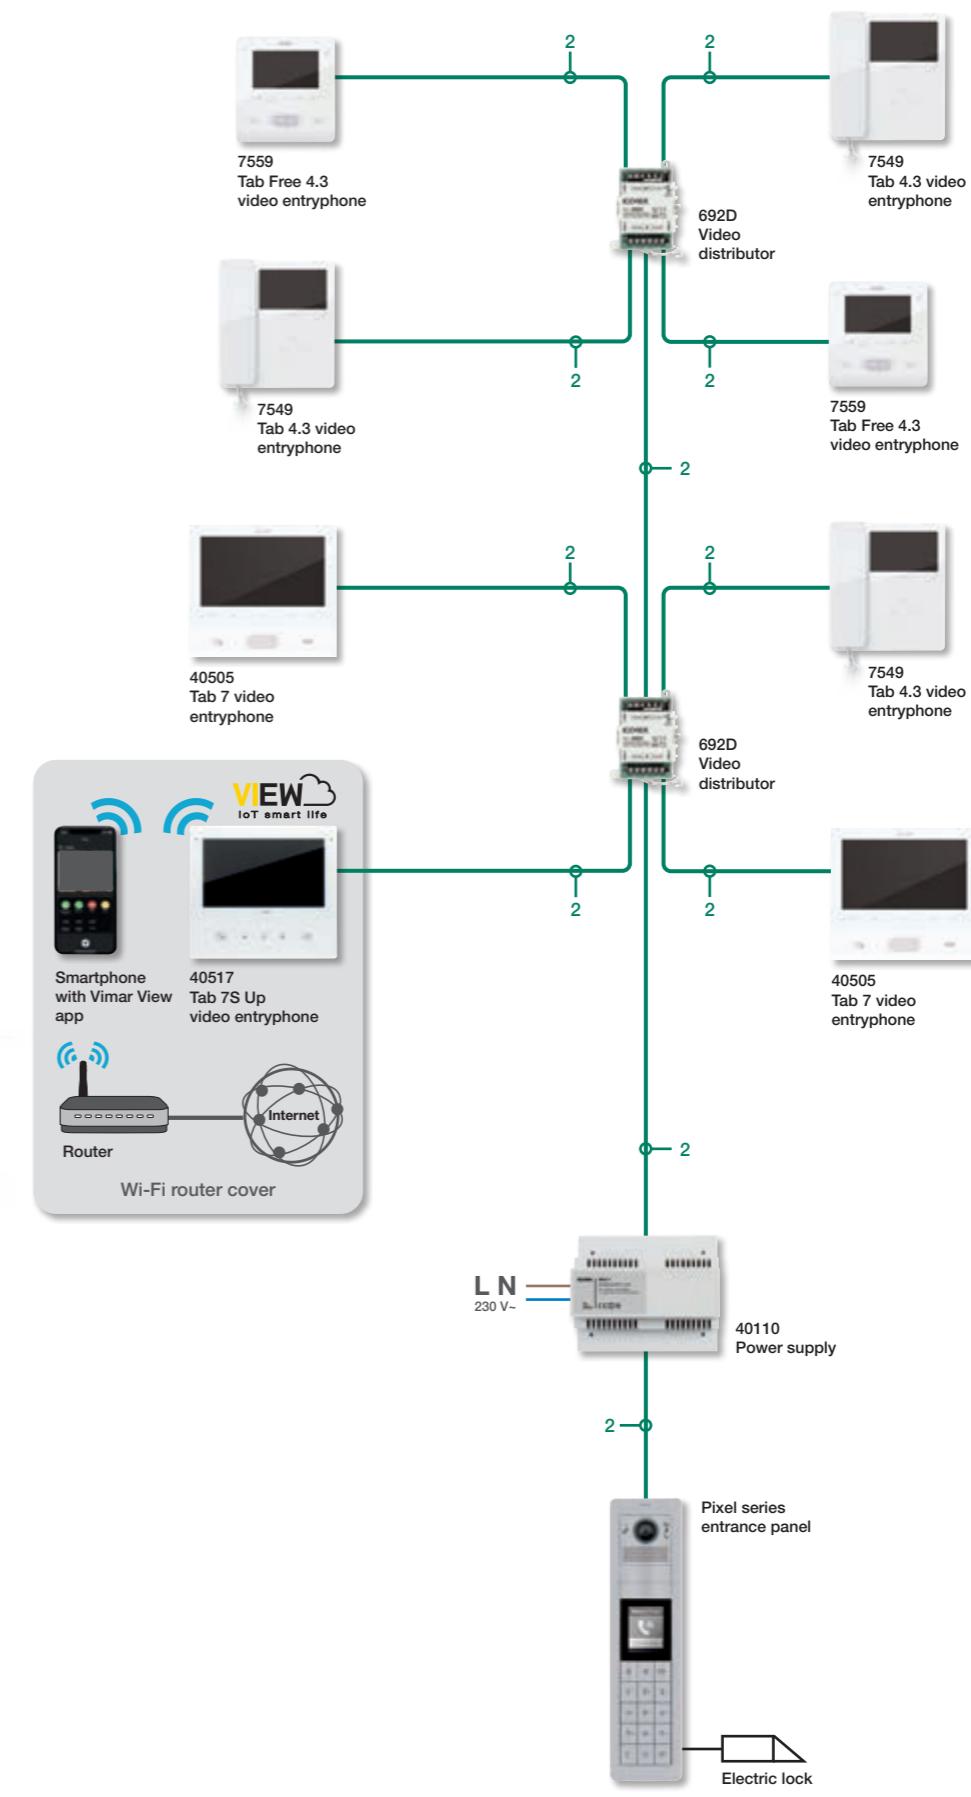


Note: for further information (cables, distance between devices, configuration, etc.), refer to the Due Fili Plus video door entry system technical book available on the web site.

Due Fili Plus - Examples of standard systems

Apartment block with video door entry system and extended cable runs, through the cable riser amplifier.




Due Fili Plus - Examples of standard systems


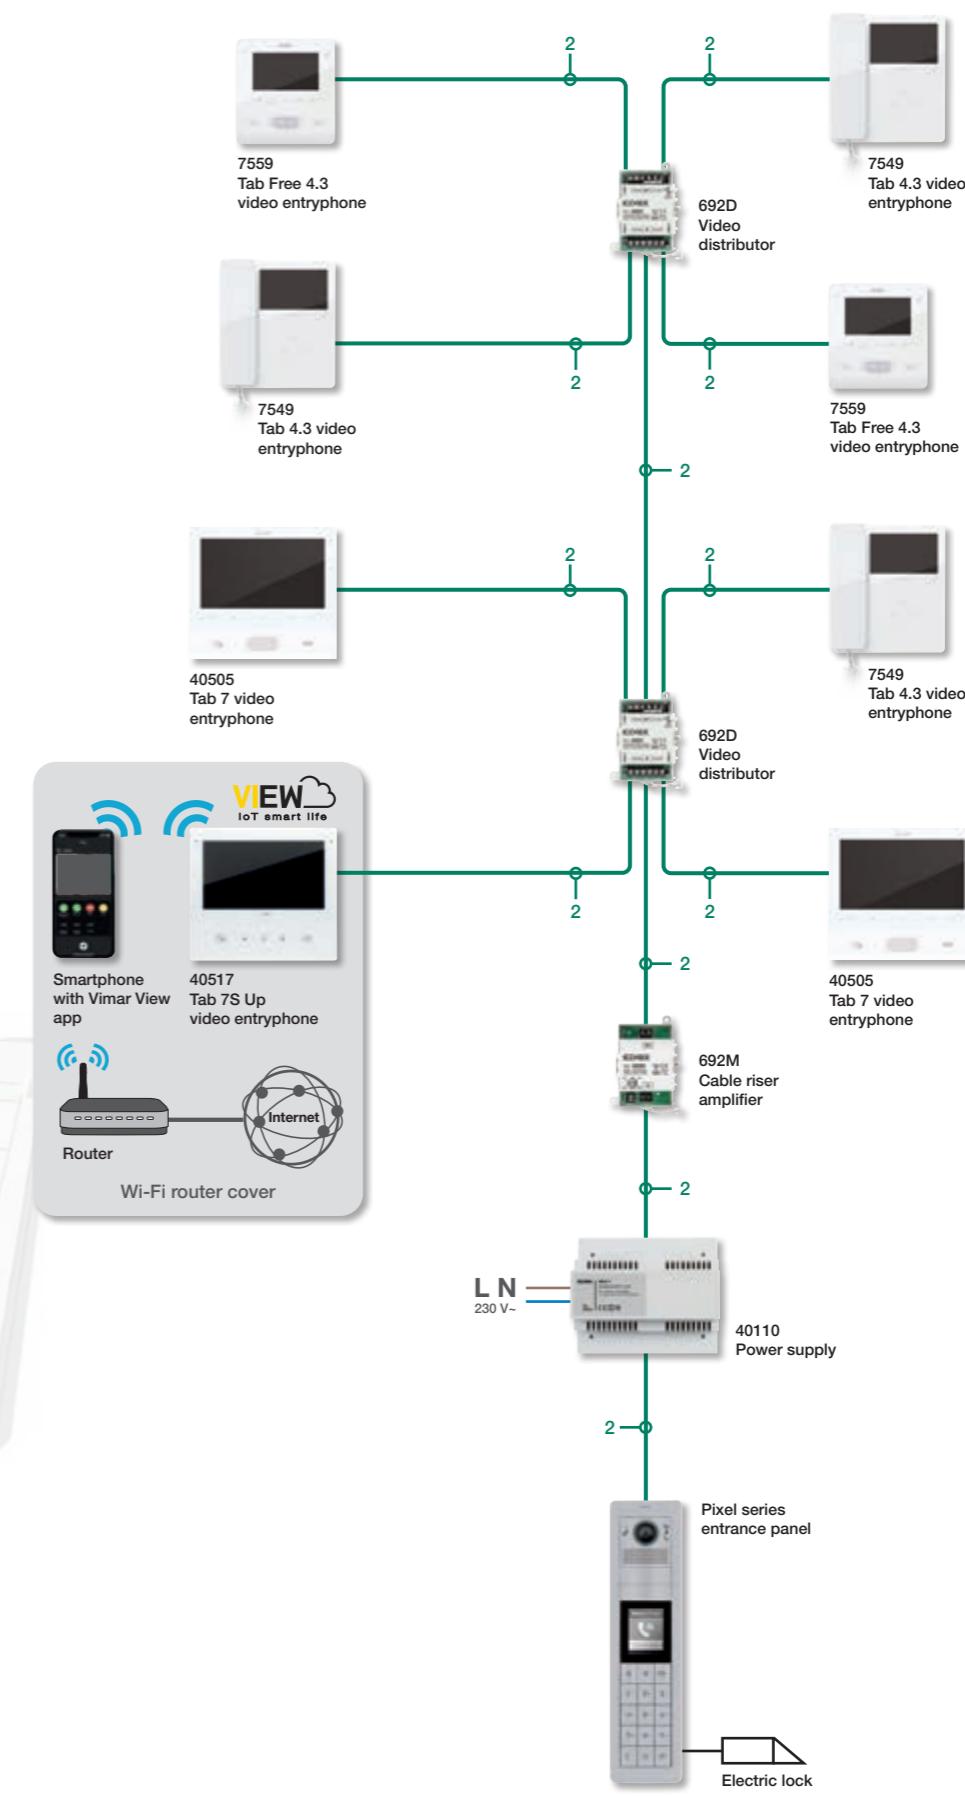


Note: for further information (cables, distance between devices, configuration, etc.), refer to the Due Fili Plus video door entry system technical book available on the web site.


Residential complex with video door entry system serving up to 200 indoor units.

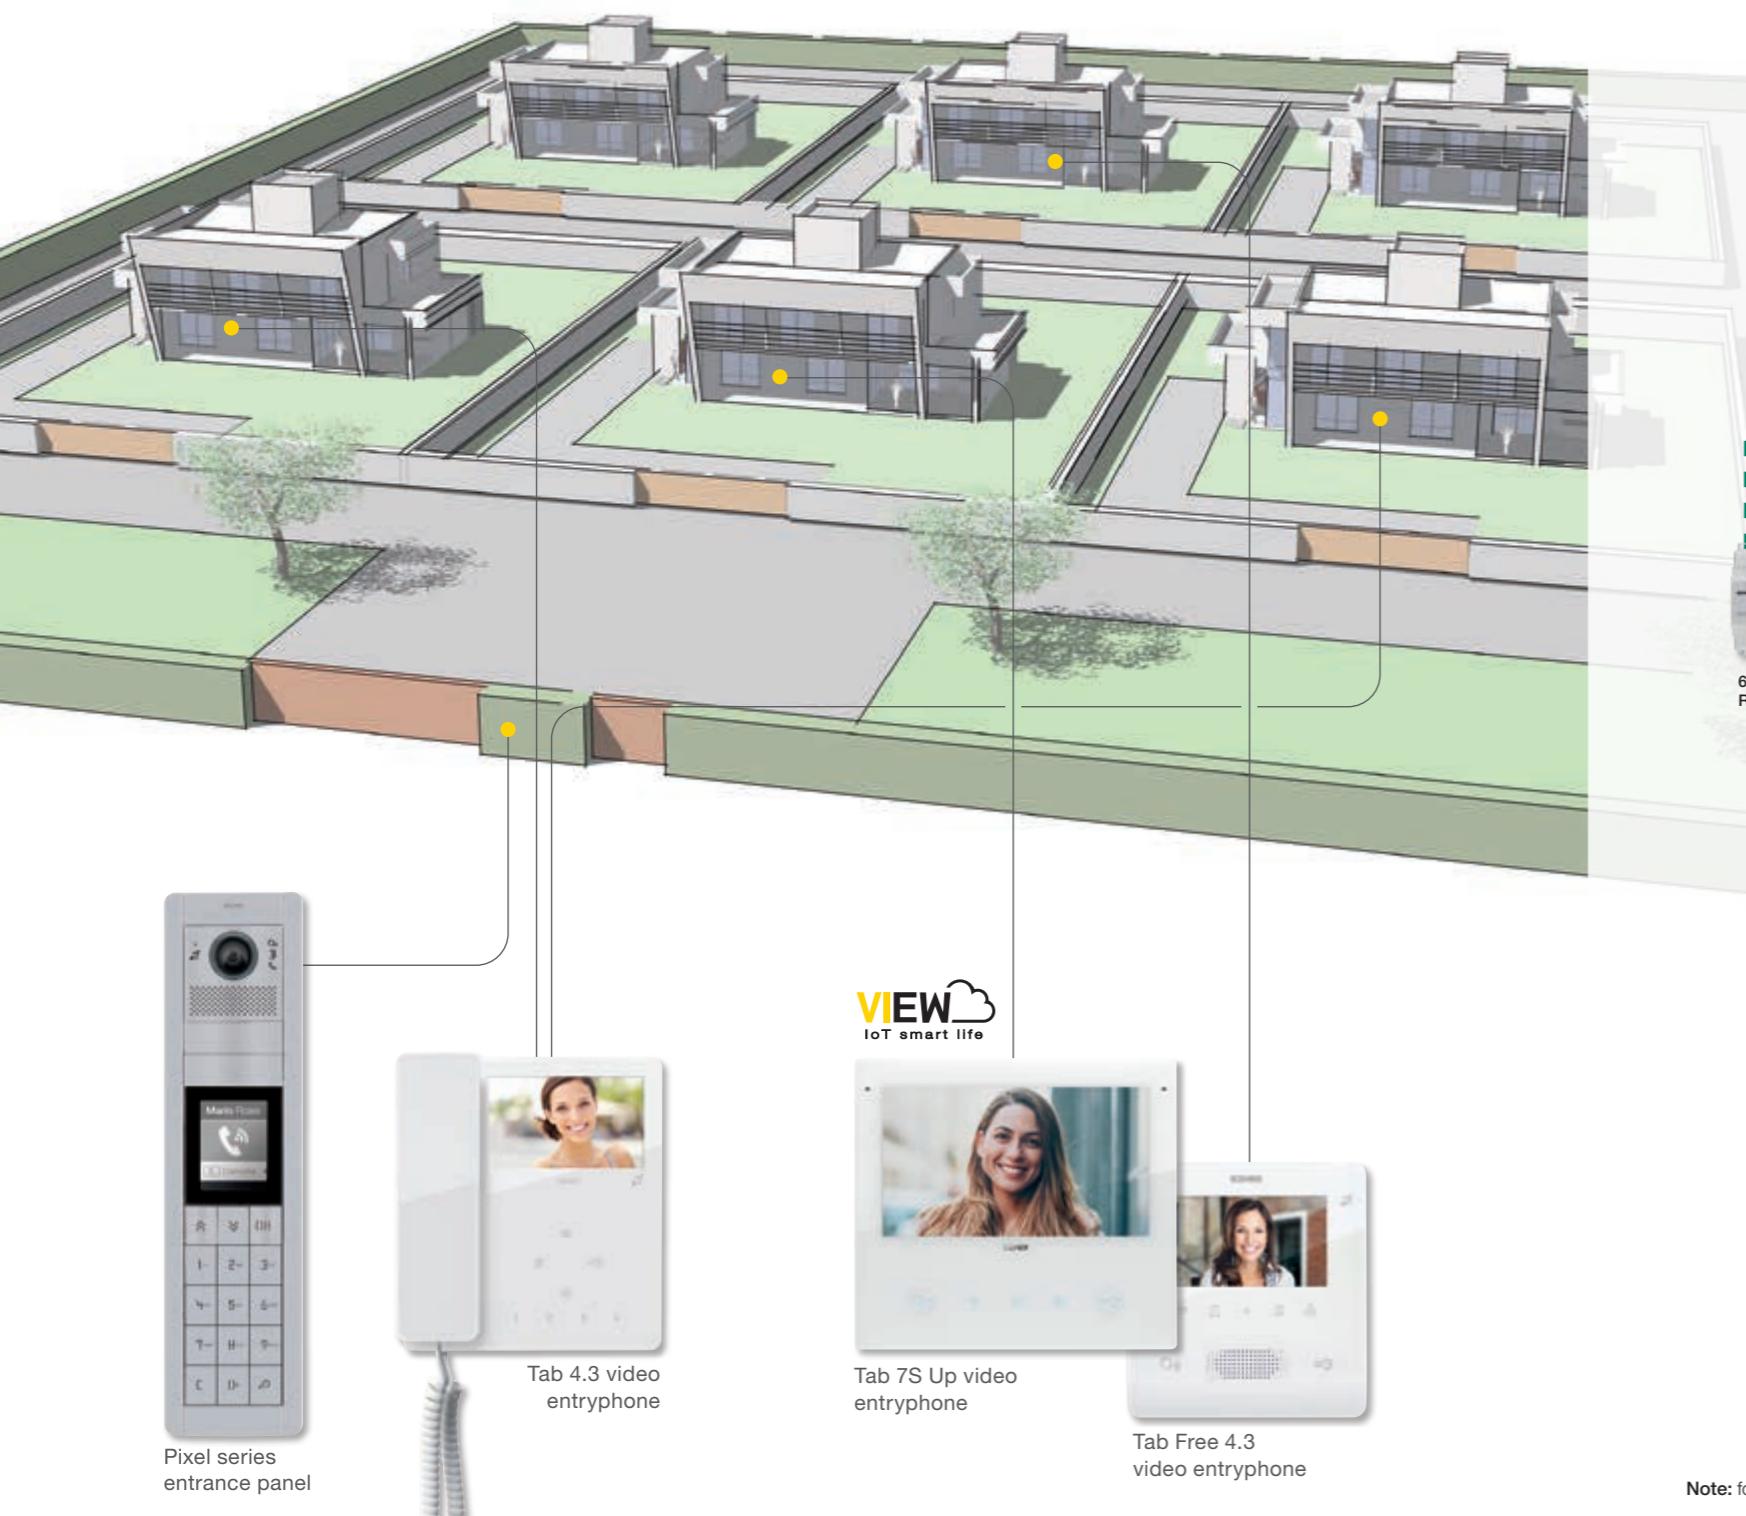

Note: for further information (cables, distance between devices, configuration, etc.), refer to the Due Fili Plus video door entry system technical book available on the web site.

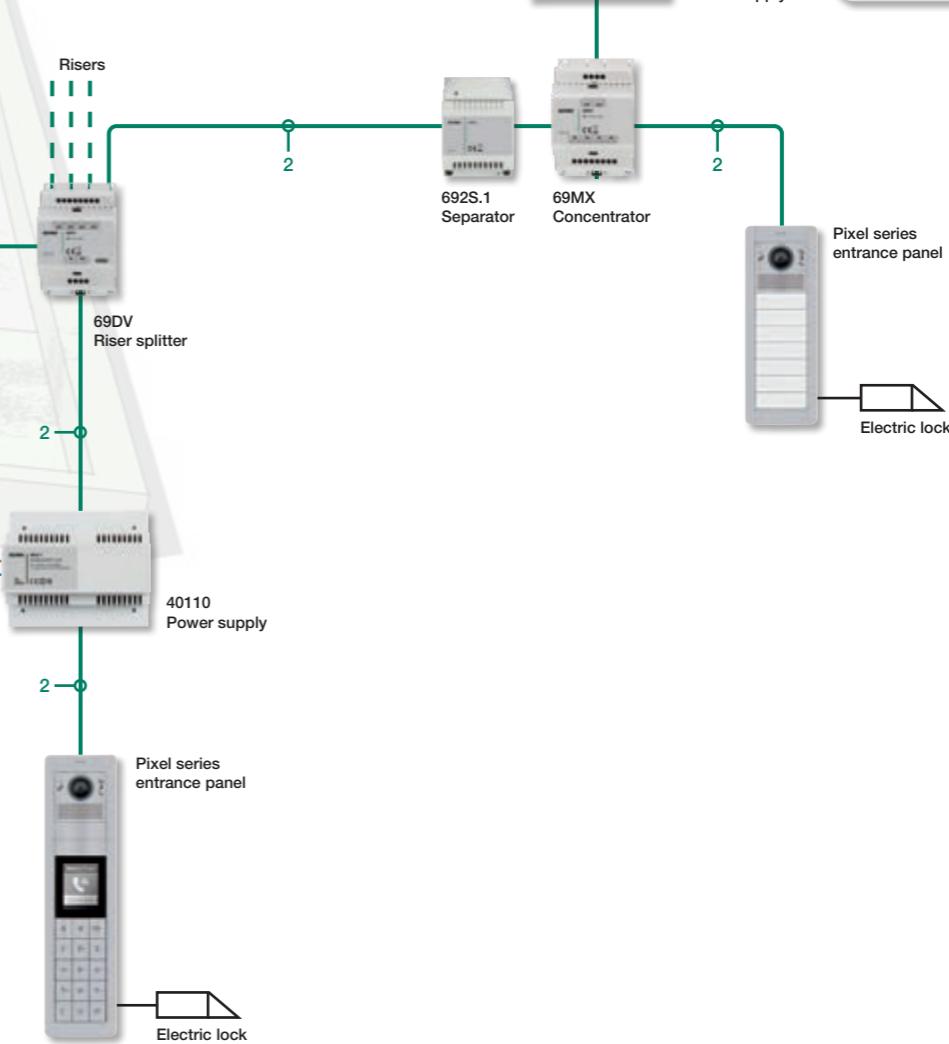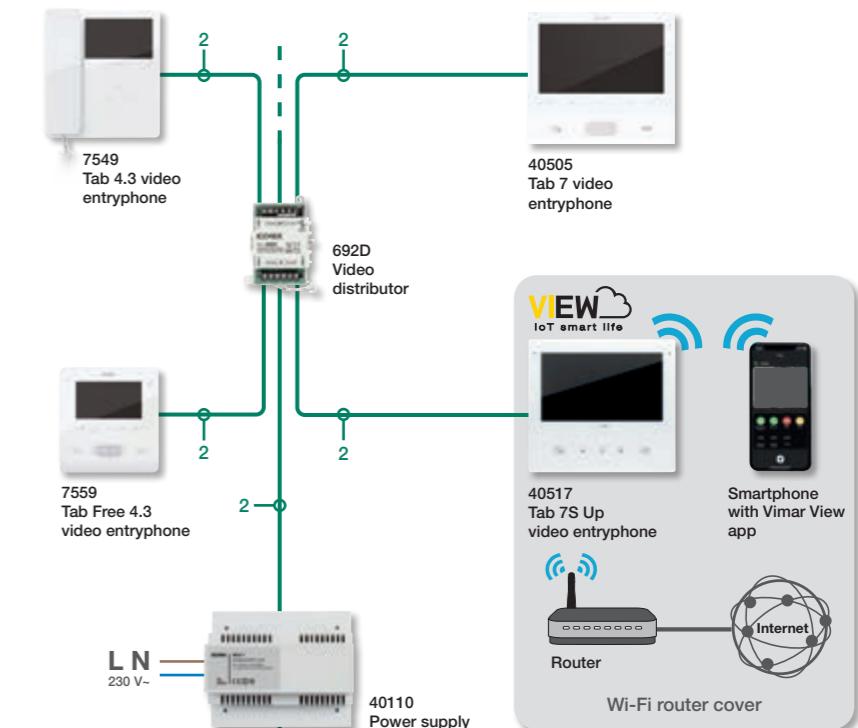

Residential complex with video door entry system serving up to 200 indoor units and porter switchboard.

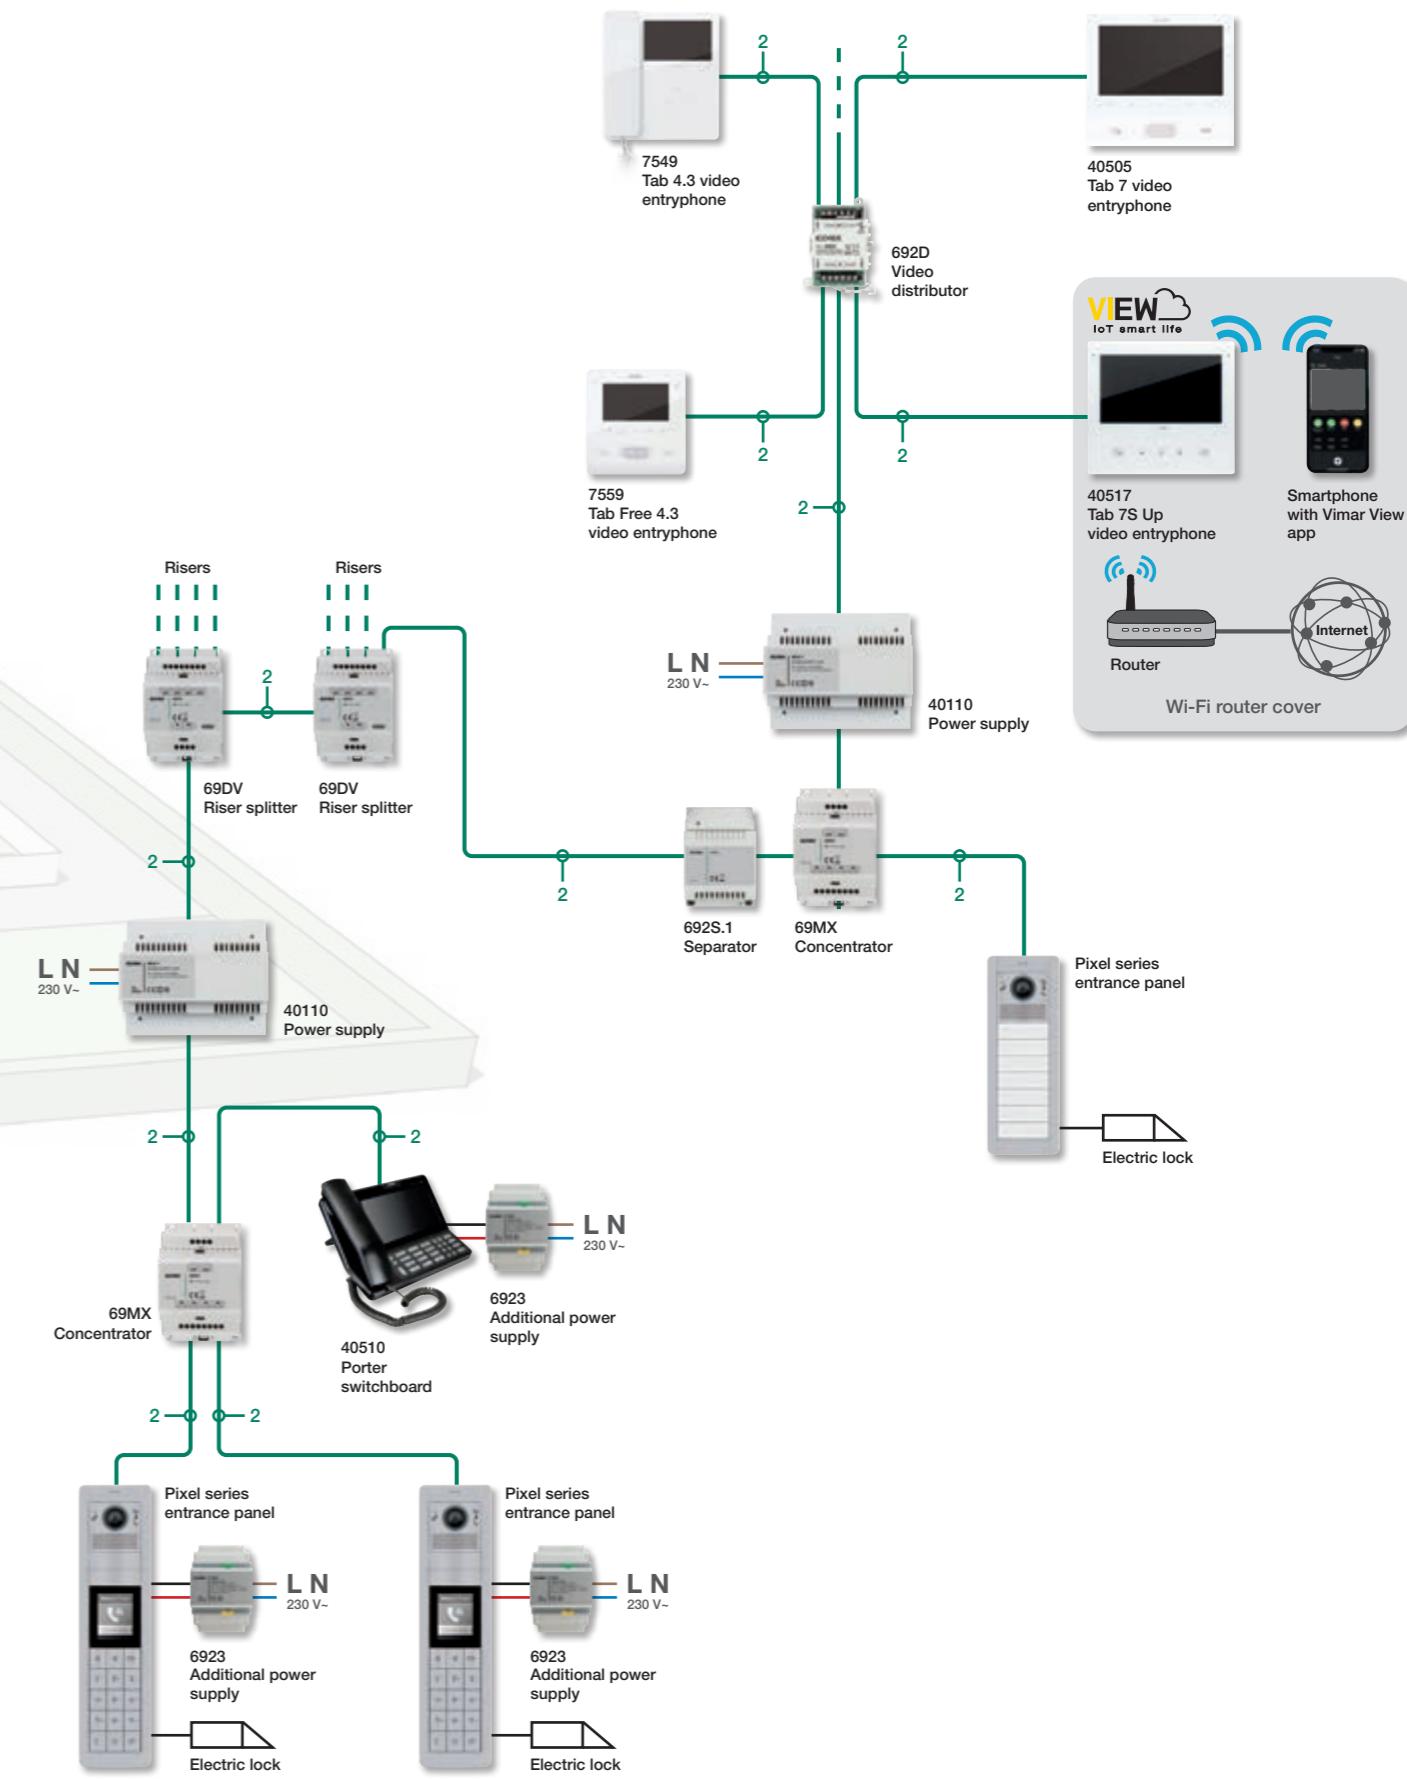


Note: for further information (cables, distance between devices, configuration, etc.), refer to the Due Fili Plus video door entry system technical book available on the web site.

Residential complex with video door entry system serving up to 500 indoor units.



Note: for further information (cables, distance between devices, configuration, etc.), refer to the Due Fili Plus video door entry system technical book available on the web site.

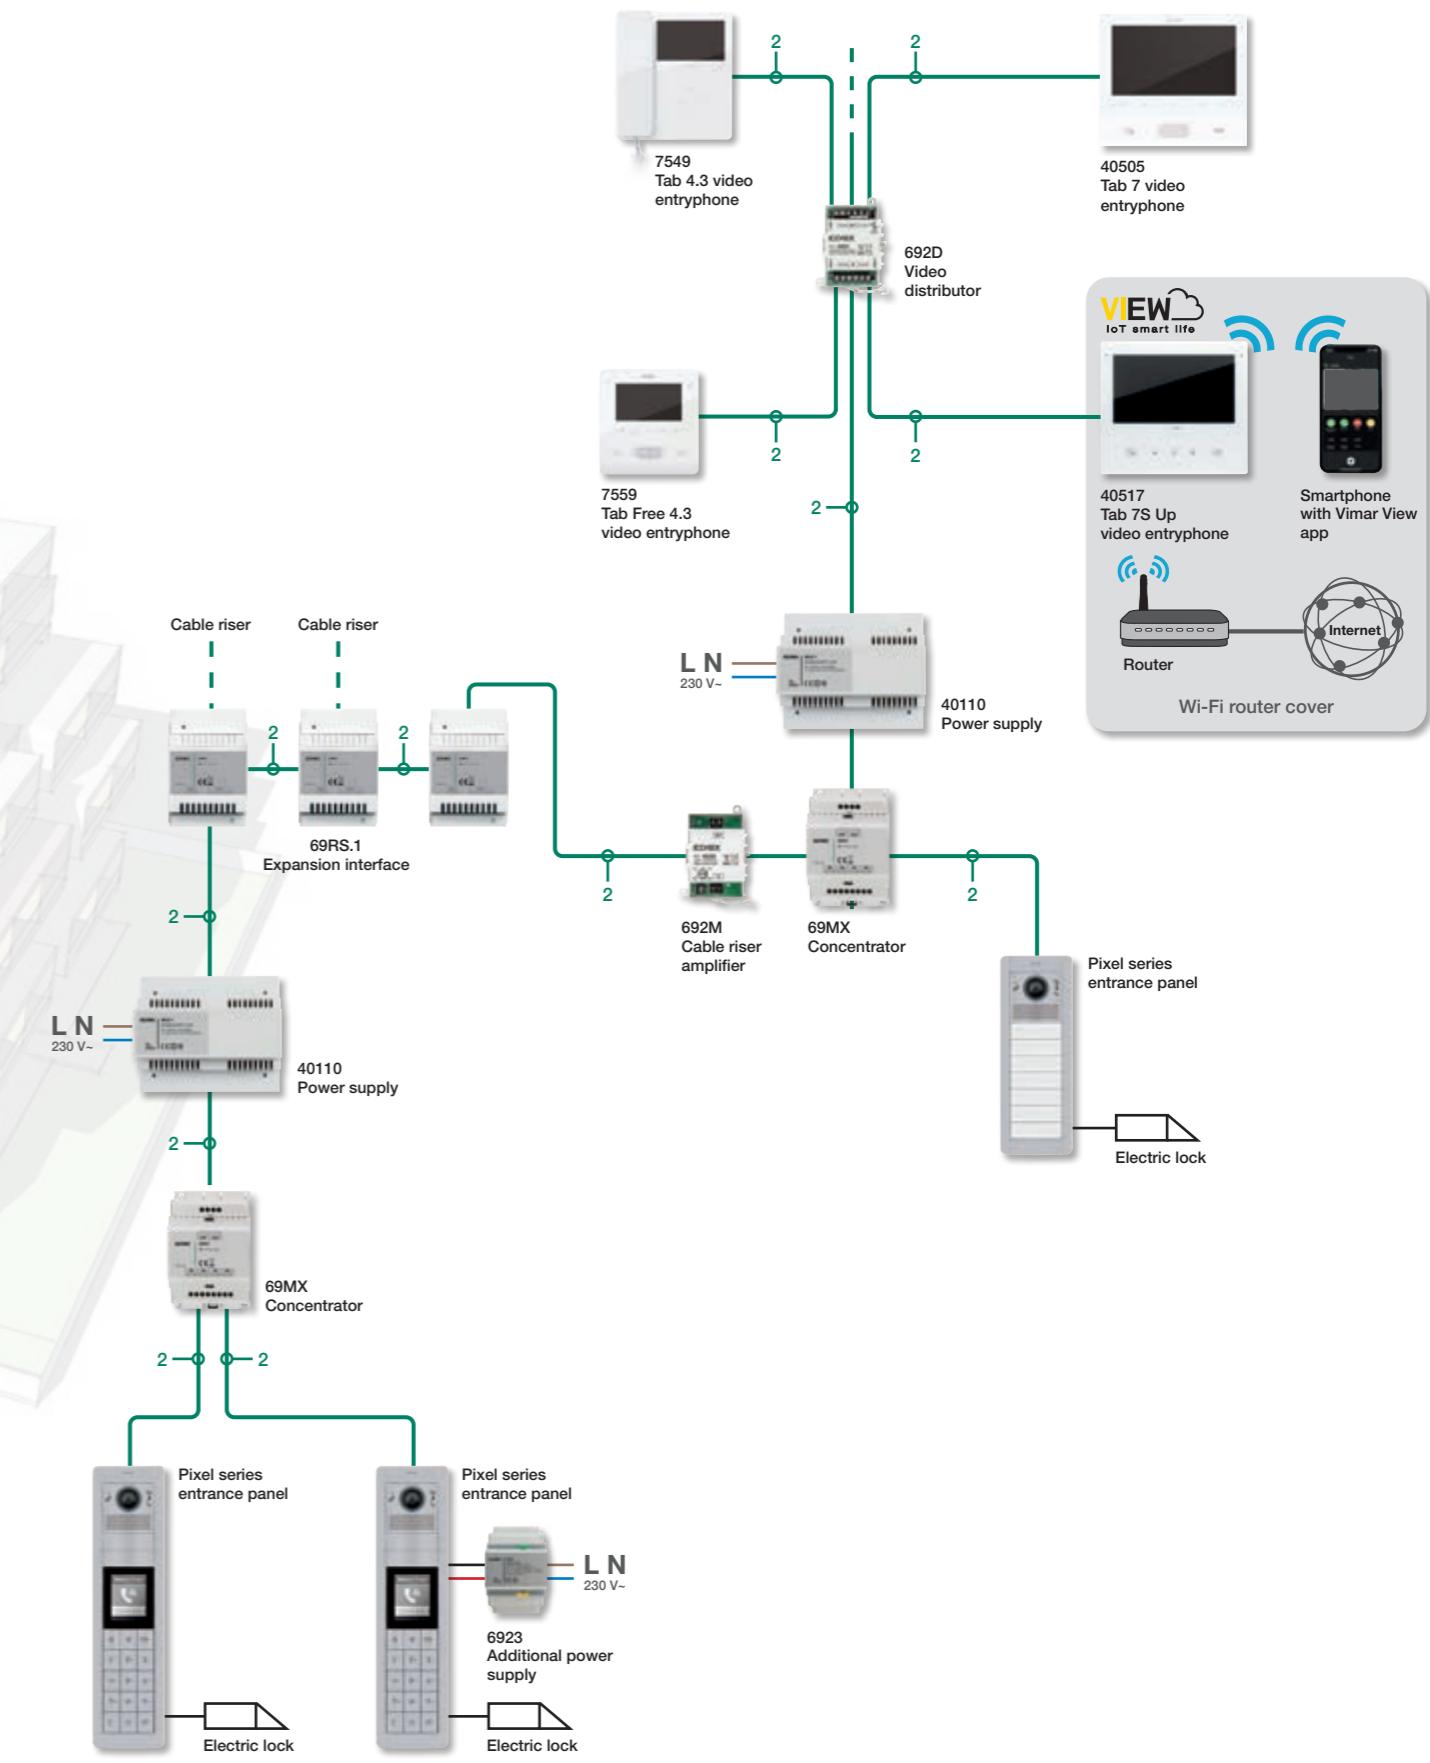

Pixel and Pixel Heavy series

Pixel and Pixel Heavy series entrance panel composition table

Composition		Electronic units								Electronic expansion units						Installation																	
1-module entrance panel	Number of calls	Audio				Audio/video				Push buttons				Name plates	LCD display	Alphanumeric keyboard	Access control keyboard	Transponder reader	Blank front ⁽⁴⁾	Mounting frame and cover plate	Boxes and accessories												
		41000 ⁽¹⁾ Basic		41002 With teleloop and camera input		41005 With teleloop and wide-angle camera				41010 10 buttons in a double row				41015 Name plates/ address number	41018	41019	41020	41017			Flush mounting												
Pixel		Pixel front modules								Pixel front modules								Pixel installation															
Pixel																																	
		41110 x 1 Single axial	41110 x 2 Single axial	41112 x 1 Double axial	41111 x 2 Single rocker	41110 x 1 Single axial	41110 x 2 Single axial	41112 x 1 Double axial	41111 x 2 Single rocker	41110 (max 5) Single axial	41112 (max 2) Double axial	41111 (max 5) Single rocker			41115	41118.yy	41119.yy	41117	41121.yy	41131.xx	9191	41141.xx	41151.xx										
		0 push b.	1 push b.	2 push b.	1 push b.	4 push b.	0 push b.	1 push b.	2 push b.	1 push b.	4 push b.	5 push b.			10 push b.					Dim. 99.5x161 mm	Dim. 98x143x50 mm	Dim. 110x167x35.8 mm	Dim. 110x167x70.6 mm										
		41200	41201	41202	41204														Blank front	41231 1 module Dim. 99.6x163 mm	40291 1 module Dim. 82.4x144x50 mm												
	Max 4 ⁽²⁾	1								-								-															
	Max 14 ⁽²⁾	1								Max 1								Max 1															
	Max 24 ⁽²⁾	1								Max 2								Max 2															

¹ Electronic unit 41000 allows a maximum of 54 calls and cannot be used in conjunction with electronic units 41018 and 41019.² Maximum number of calls that can be made using traditional push buttons. The use of electronic units 41018+41019 allows up to 6400 calls.³ Replace "xx" with 01: grey, 02: slate grey, 03: white and 04: anodised grey.

Replace "yy" with 01: grey, 02: slate grey, 03: white.


⁴ The number of blank modules/blank fronts is complementary to the number of buttons/front modules..01
Grey.02
Slate
grey.03
White.04
Anodised
grey

Accessory - Electronic unit wiring

41190
Wiring for the vertical and/or horizontal connection of modules with integrated IP protections, 485 mm length

























Pixel and Pixel Heavy series.

Pixel and Pixel Heavy series entrance panel composition table

Composition		Electronic units				Electronic expansion units					Installation				Boxes and accessories								
2-module entrance panel	Number of calls	Audio		Audio/video		Push buttons		Name plates	LCD display	Alphanumeric keyboard	Access control keyboard	Transponder reader	Blank front ⁽⁴⁾	Mounting frame and cover plate	Flush mounting		Surface mounting						
		41000 ⁽¹⁾ Basic		41002 With teleloop and camera input		41005 With teleloop and wide-angle camera		41010 10 buttons in a double row		41015 Name plates/ address number		41018	41019	41020	41017	Mounting boxes	Rain-proof frame (optional)						
Pixel	Pixel front modules								Pixel front modules					Pixel installation									
	           	41100.yy ⁽³⁾		41102.yy ⁽³⁾		41105.yy ⁽³⁾		Buttons and blank module		Buttons and blank module		Buttons and blank module		Pixel front modules									
																							
																							
																							
		0 push b.	1 push b.	2 push b.	1 push b.	4 push b.	0 push b.	1 push b.	2 push b.	1 push b.	4 push b.	5 push b.	2 push b.	10 push b.									
Pixel Heavy	Pixel Heavy front modules								Pixel Heavy front modules					Pixel Heavy installation									
	            	For 41000																					
		For 41002																					
		0 push b.	1 push b.	2 push b.	4 push b.	0 push b.	1 push b.	2 push b.	4 push b.	3 push b.	5 push b.	10 push b.											
	            	Max 14 ⁽²⁾	1																				

Pixel and Pixel Heavy series.

Pixel and Pixel Heavy series entrance panel composition table

Composition		Electronic units				Electronic expansion units						Installation										
3-module entrance panel	Number of calls	Audio		Audio/video		Push buttons				Name plates	LCD display	Alphanumeric keyboard	Access control keyboard	Transponder reader	Blank front ⁽⁴⁾	Mounting frame and cover plate	Boxes and accessories					
																Flush mounting	Surface mounting					
		41000 ⁽¹⁾ Basic	41002 With teleloop and camera input	41005 With teleloop and wide-angle camera				41010 10 buttons in a double row		41015 Name plates/ address number	41018	41019	41020	41017			Mounting boxes	Rain-proof frame (optional)				
Pixel	Pixel front modules				Pixel front modules						Pixel installation											
	 						     						 		 		 					
	 		   				     						 		 		 		 			
	 		   				     						 		 		 		 			
	 		   				     						 		 		 		 			
	 		   				     						 		 		 		 			
	 		   				     						 		 		 		 			
	 		   				     						 		<img alt="Pixel front module							

Due Fili Plus technology

1300 Series

1300 series 2-module entrance panel composition table

Composition		Electronic units						Installation		
2-module entrance panel	Number of calls	Push buttons			Alphanumeric			Boxes and accessories		Surface mounting
		Audio	Audio/video	Supplm.	Audio	Audio/video	Supplm.	Mounting boxes	Flush mounting	
		13F3	13F5	12TS	13F4	13F7				
		With 4+4 push buttons	4 push buttons	With keyboard and alphanumerical display						
		1300 cover plates								
		1321	1358	132D	132N		C321 (2 modules). Dim. 120x288x39 mm	S321 (2 modules). Dim. 120x288x74 mm		
		2 modules Dim. 100x272x22 mm								
		Buttons and blank module						C322 (2x2 modules). Dim. 220x288x39 mm	S322 (2x2 modules). Dim. 220x288x74 mm	
		R131 (max 3) Push button	R130 (max 8) Blank module				C323 (2x3 modules). Dim. 320x288x39 mm	S323 (2x3 modules). Dim. 320x288x74 mm		
		max 4 push buttons	max 8 push buttons							
		Buttons and blank module						9192 (2 modules). Dim. 98x254x50 mm	C324 (2x4 modules). Dim. 420x288x39 mm	S324 (2x4 modules). Dim. 420x288x74 mm
	Max 4 ⁽¹⁾	1	0	1	0	1	1	1	1	
	Max 12 ⁽¹⁾	1	1	1	1	2	1	1		
	Max 20 ⁽¹⁾	1	2	1	2	3	1	1		
	Max 28 ⁽¹⁾	1	3	1	3	4	1	1		

⁽¹⁾ Maximum number of calls that can be made using traditional push buttons. The use of electronic units 13F4 or 13F7 allows up to 6400 calls.

Due Fili Plus technology

1300 Series

1300 series 3-module entrance panel composition table

Composition		Electronic units						Installation		
3-module entrance panel	Number of calls	Push buttons			Alphanumeric			Boxes and accessories		Surface mounting
		Audio	Audio/video	Supplm.	Audio	Audio/video	Supplm.	Mounting boxes	Flush mounting	
		13F3	13F5	12TS	13F4	13F7				
		With 4+4 push buttons	4 push buttons	With keyboard and alphanumerical display						
		1300 cover plates								
		1331	1372	133D	133N		C321 (2 modules). Dim. 120x402x39 mm	S321 (2 modules). Dim. 120x402x74 mm		
		3 modules Dim. 100x391x22 mm								
		Buttons and blank module						C322 (2x2 modules). Dim. 220x402x39 mm	S322 (2x2 modules). Dim. 220x402x74 mm	
		R131 (max 7) Push button	R130 (max 11) Blank module				C323 (2x3 modules). Dim. 320x402x39 mm	S323 (2x3 modules). Dim. 320x402x74 mm		
		max 8 push buttons	max 12 push buttons							
	Max 8 ⁽²⁾	1	0	1	0	1	1	1	1	
	Max 20 ⁽²⁾	1	1	1	1	2	1	1	2	
	Max 32 ⁽²⁾	1	2	1	2	3	2	3	1	
	Max 44 ⁽²⁾	1	3	1	3	4	1	1	1	

⁽²⁾ Maximum number of calls that can be made using traditional push buttons. The use of electronic units 13F4 or 13F7 allows up to 6400 calls.

Patavium series

Patavium series 2-, 3- and 4-module entrance panel composition table

Composition		2-module entrance panels					3-module entrance panels		4-module entrance panels		Installation				
	Number of calls	Push buttons			Alphanumeric		Push buttons								
		Audio electronic unit		Suppl.	Audio electronic unit	Suppl.	Audio electronic unit		Flush mounting boxes						
		13F3.B	12TS.B	13A4.B.43			13F3.B								
		With 4+4 push buttons		4 push b.	With keyboard and alphanumeric display		With 4+4 push buttons								
		41601	41602	41603	41604	41643	41640	41642	41606	41608	41610	41612	41592	41593	41594
		1 push b.	2 push b.	3 push b.	4 push b.	8 push b.			6 push b.	8 push b.	10 push b.	12 push b.			
		Audio/video electronic units		Suppl.	Audio/video electronic units		Audio/video electronic units								
		13F5.B	12TS.B	13A7.B.43			13F5.B								
		With 4+4 push buttons		4 push b.	With keyboard and alphanumeric display		With 4+4 push buttons								
		41621	41622	41623	41624	41643	41641	41642	41626	41628	41630	41632	41592	41593	41594
		1 push b.	2 push b.	3 push b.	4 push b.	8 push b.			6 push b.	8 push b.	10 push b.	12 push b.			
		2 modules Dim. ⁽²⁾					3 modules Dim. ⁽³⁾		4 modules Dim. ⁽⁴⁾		2 modules Dim. ⁽²⁾	3 modules Dim. ⁽³⁾	4 modules Dim. ⁽⁴⁾		
		Max 4 ⁽¹⁾	1	0	1	0	0	0	0	1	0	0			
		Max 6 ⁽¹⁾	0	0	0	0	1	0	0	0	1	0			
		Max 8 ⁽¹⁾	0	0	0	0	0	1	0	0	1	0			
		Max 10 ⁽¹⁾	0	0	0	0	0	0	1	0	0	1			
		Max 12 ⁽¹⁾	0	0	0	0	0	0	0	1	0	0	1		
		Max 12 ⁽¹⁾	1	1	1	0	0	0	0	2	0	0			
		Max 20 ⁽¹⁾	1	2	1	2	0	0	0	0	3	0	0		
		Max 28 ⁽¹⁾	1	3	1	3	0	0	0	0	4	0	0		

¹ Maximum number of calls that can be made using traditional push buttons. The use of electronic units 13A4.B.43 or 13A7.B.43 allows up to 6400 calls.² Dimensions of 2-module cover plate: 119.8x334x4 mm. Dimensions of 2-module flush mounting box: 99.9x270.2x60.6 mm.³ Dimensions of 3-module cover plate: 119.8x448x4 mm. Dimensions of 3-module flush mounting box: 99.9x384.7x60.6 mm.⁴ Dimensions of 4-module cover plate: 119.8x563x4 mm. Dimensions of 4-module flush mounting box: 99.9x499.2x60.6 mm.

Steely series

Steely series 2-, 3- and 4-module entrance panel composition table

Composition		2-module entrance panels					3-module entrance panels		4-module entrance panels		Installation					
	Number of calls	Push buttons			Alphanumeric		Push buttons									
		Audio electronic unit		Suppl.	Audio electronic unit	Suppl.	Audio electronic unit		Suppl.	Audio electronic unit	Suppl.	Flush mounting boxes				
		13F3.B	12TS.B	13A4.B	13A7.B	13F3.B	12TS.B	13A4.B	13A7.B	13F3.B	12TS.B	13A4.B				
		With 4+4 push buttons		4 push b.	With keyboard and alphanumeric display		With 4+4 push buttons									
		41501	41502	41503	41504	41543	41540	41642	41506	41508	41510	41512	41592	41593	41594	
		1 push b.	2 push b.	3 push b.	4 push b.	8 push b.			6 push b.	8 push b.	10 push b.	12 push b.				
		Audio/video electronic units		Suppl.	Audio/video electronic units		Audio/video electronic units									
		13F5.B	12TS.B	13A7.B	13F5.B	12TS.B	13A7.B	13F5.B	12TS.B	13A7.B	13F5.B	12TS.B	13A7.B	13F5.B		
		With 4+4 push buttons		4 push b.	With keyboard and alphanumeric display		With 4+4 push buttons									
		41521	41522	41523	41524	41543	41541	41542	41526	41528	41530	41532	41592	41593	41594	
		1 push b.	2 push b.	3 push b.	4 push b.	8 push b.			6 push b.	8 push b.	10 push b.	12 push b.				
		2 modules Dim. ⁽²⁾					3 modules Dim. ⁽³⁾		4 modules Dim. ⁽⁴⁾		3 modules Dim. ⁽²⁾		4 modules Dim. ⁽³⁾		4 modules Dim. ⁽⁴⁾	
		Max 4 ⁽¹⁾	1	0	1	0	0	0								

Roxie: video entrance panels

Roxie - Entrance panel



40170
Audio/video with colour camera, RFID access control, surface and semi-flush mounting, to be completed with 1, 2 or 4 push buttons, grey



40177
For surface or flush mounting in 1-module mounting box, grey



40178
For surface or flush mounting in 2-module mounting box, grey



40179
Mounting frame, frame and flush mounting box, for semi-flush mounting, grey

Roxie - Accessories



40171
Kit for 1 call button



40172
Kit for 2 call buttons



40174
Kit for 4 call buttons



40169
7 Mifare RFID transponder cards



40175
5 Mifare RFID transponder cards



01817
Mifare transponder card

Pixel Up series: video entrance panels

Video entrance panels with audio/video electronic unit and accessories



▲ 40402
Audio/video with VIGIK+ reader hole, stainless steel



▲ 40402.05
Audio/video with VIGIK+ reader hole, black metal



▲ 40402.06
Audio/video with VIGIK+ reader hole, champagne



▲ 40402.07
Audio/video with VIGIK+ reader hole, copper



▲ 40402.08
Audio/video with VIGIK+ reader hole, black painted



40431
Flush mounting box for 40404 and 40424



40404
Audio/video with 4x4 reader hole, stainless steel



40404.05
Audio/video with 4x4 reader hole, black metal



40404.06
Audio/video with 4x4 reader hole, champagne



40404.07
Audio/video with 4x4 reader hole, copper



40404.08
Audio/video with 4x4 reader hole, black painted



40424
Audio with 4x4 reader hole, stainless steel



40431
Flush mounting box for 40404 and 40424



40441
Surface mounting box for 40404 and 40424, stainless steel



40441.05
Surface mounting box for 40404 and 40424, black metal



40441.06
Surface mounting box for 40404 and 40424, champagne



40441.07
Surface mounting box for 40404 and 40424, copper



40441.08
Surface mounting box for 40404 and 40424, black painted

Pixel Up series: video entrance panels

Video entrance panels with audio/video electronic unit and accessories



Pixel and Pixel Heavy series: entrance panels

Audio, audio/video and expansion electronic units



Pixel and Pixel Heavy series: entrance panels

Pixel - Front modules




Pixel - Cover plates with frames and mounting boxes




Pixel and Pixel Heavy series: entrance panels

Pixel Heavy - Front modules (IK09, IK10, IP54)

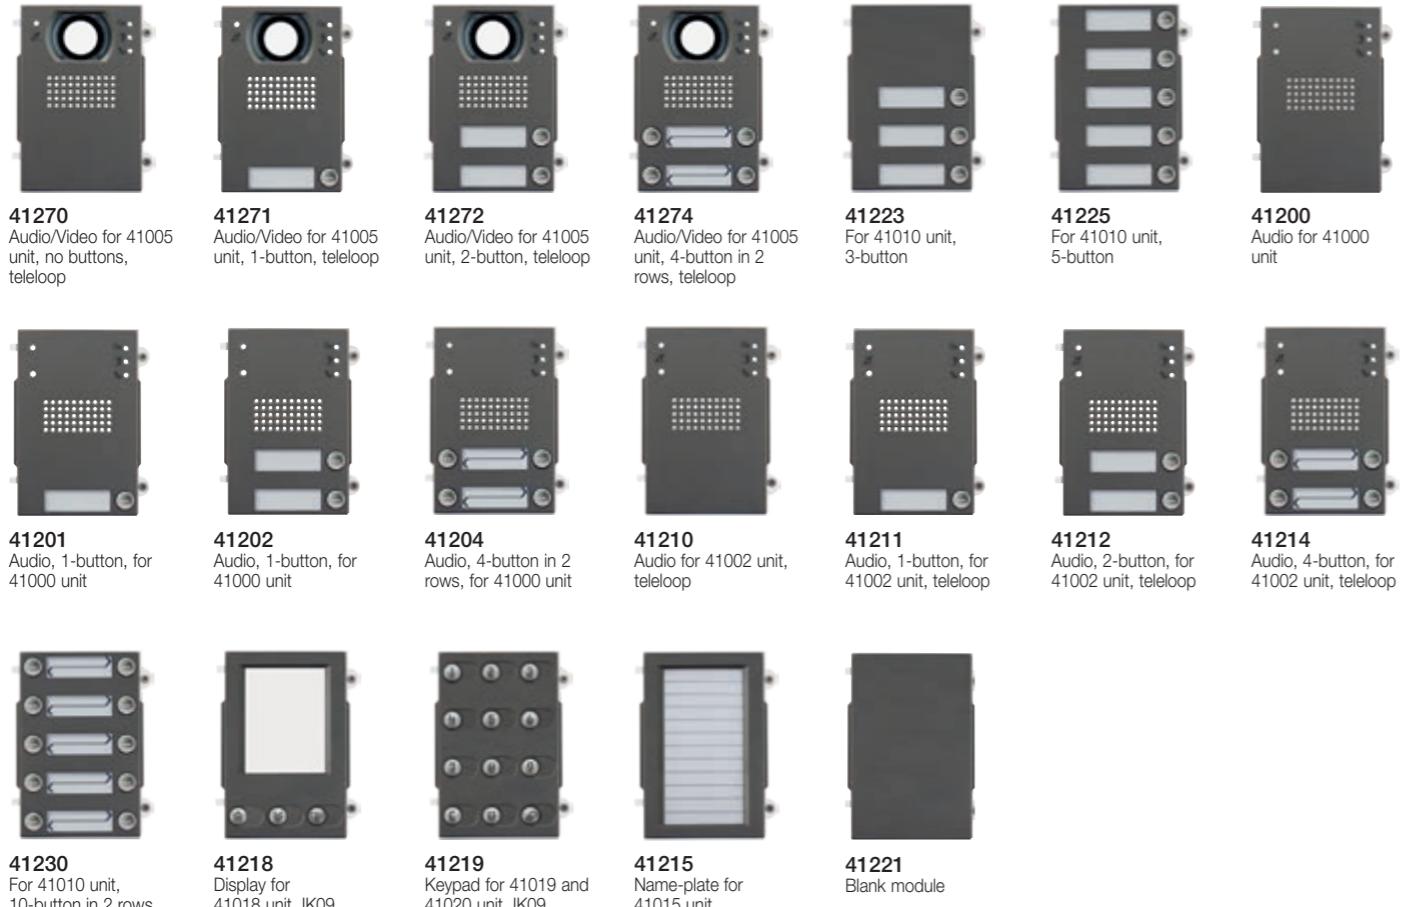

Pixel Heavy - Cover plates with frames, tearproof mounting boxes and surface mounting boxes with built-in rainproof cover

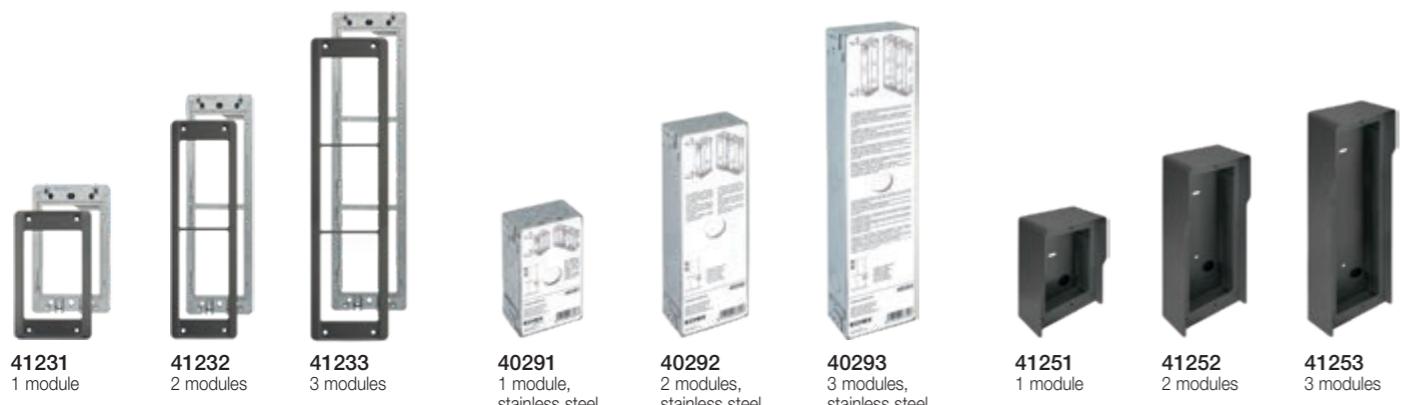

Pixel and Pixel Heavy series: entrance panels


Rainproof cover



Surface mounting boxes with built-in rainproof cover





Universal adaptors

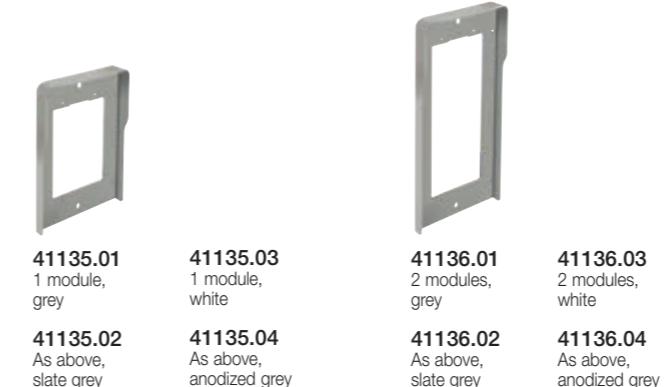

Electronic units for 1300, 1200, reinforced 1200 and 8000 series

Audio and audio/video electronic units


**13F2.1**
Audio/Video for
13K1 entrance
plate**13F5**
Audio/Video,
8-button in
2 rows**13F7**
Audio/Video, with
alphanumeric key-
pad, stainless steel
buttons**13F1**
Audio/Video for
13K1 entrance
plate**13F3**
Audio/Video for
13K1 entrance
plate**13F4**
Audio,
8-button in
2 rows**13F4.B**
As above,
with white LED**12TS**
4-button
additional unit**12TS.B**
As above,
with white LED**12TD**
8-button
additional unit**R130**
Blank module for
1300 entrance plate**R200/50**
As above,
in pack of 50 pieces**R131**
Button for 1300
entrance plate**9192**
2 modules**9193**
3 modules

1300 series: entrance panels

Audio/video reduced module entrance panels

**13K1**
1-button, entrance plate for
surface and flush mounting,
electropolished anodized
aluminium**91K1**
Flush mounting box
for 13K1

2- and 3-module rainproof covers

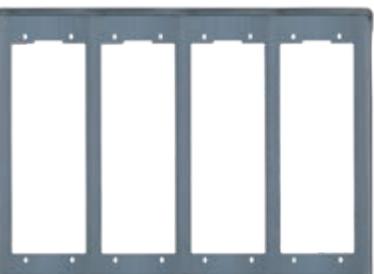**C321**
2 modules, electropolished
anodized aluminium**C331**
As above, 3 modules**C322**
2x2 modules, electropolished
anodized aluminium**C332**
As above, 3x2 modules**C323**
2x3 modules, electropolished
anodized aluminium**C333**
As above, 3x3 modules**C324**
2x4 modules, electropolished
anodized aluminium**C334**
As above, 3x4 modules

2- and 3-module entrance plates and additional plates


**1321**
1-button and
3 blank covers,
electropolished
anodized aluminium**132D**
Alphanumeric
keypad,
electropolished
anodized aluminium**1358**
Additional,
8-button,
electropolished
anodized aluminium**132N**
Additional,
with name-plate,
electropolished
anodized aluminium**1331**
1-button and
7 blank covers,
electropolished
anodized aluminium**133D**
Alphanumeric key-
pad and
1 name-plate,
electropolished
anodized aluminium**133N**
Additional,
with name-plate,
electropolished
anodized aluminium**1372**
Additional,
12-button,
electropolished
anodized aluminium**S321**
2 modules,
electropolished
anodized aluminium**S331**
3 modules,
electropolished
anodized aluminium**S322**
2x2 modules,
electropolished
anodized aluminium**S324**
2x4 modules,
electropolished
anodized aluminium**S332**
3x3 modules,
electropolished
anodized aluminium**S333**
3x4 modules,
electropolished
anodized aluminium

1300 series: entrance panels

Accessories

**R200**
Single button for
entrance panels**R130**
Blank module for
1300 entrance plate**R200/50**
As above,
in pack of 50 pieces**R131**
Button for 1300
entrance plate**9192**
2 modules**9193**
3 modules

2- and 3-module rainproof covers

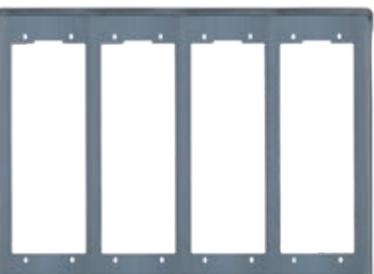
**C321**
2 modules, electropolished
anodized aluminium**C331**
As above, 3 modules**C322**
2x2 modules, electropolished
anodized aluminium**C332**
As above, 3x2 modules**C323**
2x3 modules, electropolished
anodized aluminium**C333**
As above, 3x3 modules**C324**
2x4 modules, electropolished
anodized aluminium**C334**
As above, 3x4 modules

Surface mounting boxes with built-in rainproof cover

**S321**
2 modules,
electropolished
anodized aluminium**S331**
3 modules,
electropolished
anodized aluminium**S322**
2x2 modules,
electropolished
anodized aluminium**S324**
2x4 modules,
electropolished
anodized aluminium**S332**
3x3 modules,
electropolished
anodized aluminium**S333**
3x4 modules,
electropolished
anodized aluminium

1200 series: audio/video and audio entrance panels

2- and 3-module audio/video and additional entrance plates

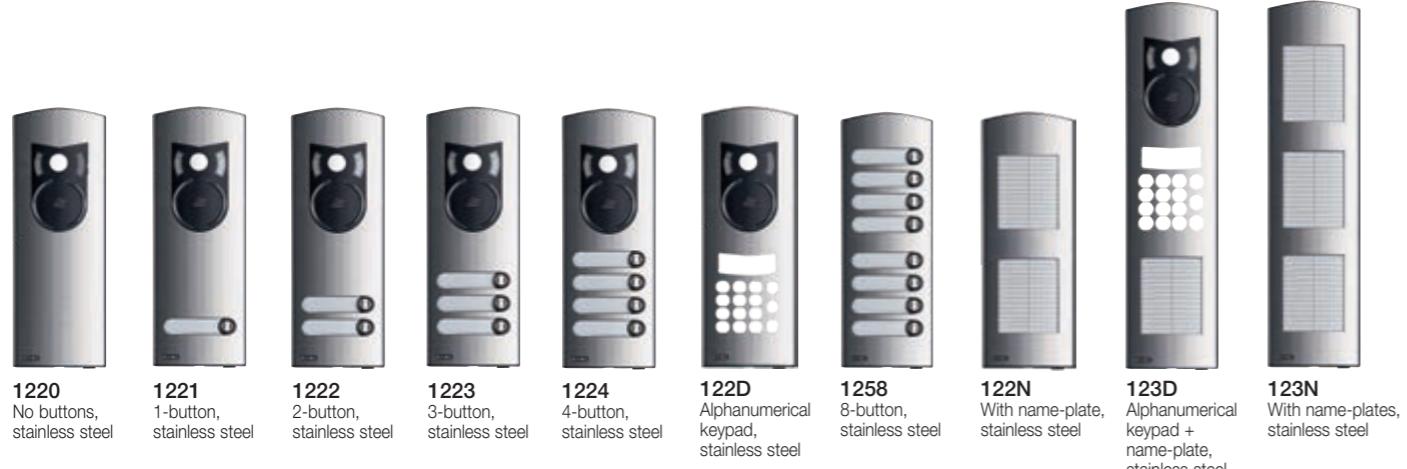

1220 No buttons, stainless steel
1221 1-button, stainless steel
1222 2-button, stainless steel
1223 3-button, stainless steel
1224 4-button, stainless steel
122D Alphanumeric keypad, stainless steel
1258 8-button, stainless steel
122N With name-plate, stainless steel
123D Alphanumeric keypad + name-plate, stainless steel
123N With name-plates, stainless steel

Reinforced 1200 series: audio/video and audio entrance panels

2-module audio/video and additional entrance plates



1220/35 No buttons, IK10 protection, sable grey
1221/35 1-button, IK10 protection, sable grey
1222/35 2-button, IK10 protection, sable grey
1223/35 3-button, IK10 protection, sable grey
1224/35 4-button, IK10 protection, sable grey
1258/35 Additional, 8-button, IK10 protection, sable grey
122D/35 Alphanumeric keypad, IK10 protection, sable grey
122N/35 Additional, name-plate, IK10 protection, sable grey

2- and 3-module flush mounting and angular surface mounting boxes



9192 2 modules
9193 3 modules

1200 series: audio/video and audio entrance panels

2- and 3-module rainproof covers



1P21 2 modules, stainless steel
1P31 3 modules, stainless steel
1P22 2x2 modules, stainless steel
1P32 3x2 modules, stainless steel
1E21 2 modules, stainless steel
1E31 3 modules, stainless steel
1E22 2x2 modules, stainless steel
1E32 3x2 modules, stainless steel

8000 series: audio/video and audio entrance panels

Standard modules for audio/video entrance panels



Additional modules



RPS1 1-button, for 12TS, light grey
RPS2 2-button, for 12TS, light grey
RPS3 3-button, for 12TS, light grey
RPS4 4-button, for 12TS, light grey
805N Name-plate for 13 names, light grey
80PN House number, light grey
8000 Blank module, light grey

Frames



8082 For 2 modules and for additional modules only, RAL 7035 grey
8092 For electronic units 13F3, 13F4, 13F5, 13F7, RAL 7035 grey
8083 For 3 modules and for additional modules only, RAL 7035 grey
8093 For electronic units 13F3, 13F4, 13F5, 13F7, 12TS, 12TD, RAL 7035 grey
9192 2 modules
9193 3 modules

8000 series: audio/video and audio entrance panels

Rainproof covers

9212
2 modules,
light grey9213
3 modules,
light grey9222
2x2 modules,
light grey9223
2x3 modules,
light grey9232
3x2 modules,
light grey9233
3x3 modules,
light grey9242
4x2 modules,
light grey9243
4x3 modules,
light grey

Surface mounting boxes

9312
2 modules,
light grey9313
3 modules,
light grey9322
2x2 modules,
light grey9323
2x3 modules,
light grey9332
3x2 modules,
light grey9333
3x3 modules,
light grey9342
4x2 modules,
light grey9343
4x3 modules,
light grey

8100 series: audio entrance panels up to 200 internal units

Audio electronic unit, 2-module audio and additional entrance plates

6931
Due Fili electronic unit
for audio entrance panel,
up to 200
internal units8114/19
4-button,
light grey8116/19
6-button,
light grey8118/19
8-button,
light grey8166/19
Additional,
6-button,
light grey8168/19
Additional,
8-button,
light grey8170/19
Additional,
10-button,
light grey8172/19
Additional,
12-button,
light grey8174/19
Additional,
14-button,
light grey

1300/E series: audio/video and audio entrance panels

Audio/video electronic unit and audio/video entrance plates

40135
Audio/video unit
for entrance panel
40151 and 4015240151
With 1 call button,
supplied with surface and
flush mounting boxes,
electro-polished anodised
aluminium40152
With 2 call buttons,
supplied with surface and
flush mounting boxes,
electro-polished anodised
aluminium

Audio electronic unit and audio entrance plates

40131
Audio unit for
entrance panel
40141 and 4014240141
With 1 call button,
supplied with surface and
flush mounting boxes,
electro-polished anodised
aluminium40142
With 2 call buttons,
supplied with surface and
flush mounting boxes,
electro-polished anodised
aluminium

Patavium series: entrance panels

Audio and audio/video electronic units

**13F3.B**
Audio,
8-button in
2 rows, white LED**13A4.B.43**
Audio, with
alphanumerical keypad,
white LED, golden
finish stainless steel
buttons**13F5.B**
Audio/Video,
8-button in
2 rows, white LED**13A7.B.43**
Audio/Video, with
alphanumerical
keypad, white LED,
golden finish stainless
steel buttons**12TS.B**
4-button
additional unit,
white LED

Patavium series: entrance panels

2-module audio and additional entrance plates

**41601**
1-button,
satin-finish brass**41602**
2-button,
satin-finish brass**41603**
3-button,
satin-finish brass**41604**
4-button,
satin-finish brass**41640**
Alphanumerical
keypad,
satin-finish brass**41642**
Additional,
name-plate,
satin-finish brass**41643**
Additional,
8-button,
satin-finish brass

2-module audio/video and additional entrance plates

**41621**
1-button,
satin-finish brass**41622**
2-button,
satin-finish brass**41623**
3-button,
satin-finish brass**41624**
4-button,
satin-finish brass**41641**
Alphanumerical
keypad,
satin-finish brass**41642**
Additional,
name-plate,
satin-finish brass**41643**
Additional,
8-button,
satin-finish brass

3 and 4 modules audio entrance plates

**41606**
6-button,
satin-finish brass**41608**
8-button,
satin-finish brass**41610**
10-button,
satin-finish brass**41612**
12-button,
satin-finish brass

3 and 4 modules audio/video entrance plates


**41626**
6-button,
satin-finish brass**41628**
8-button,
satin-finish brass**41630**
10-button,
satin-finish brass**41632**
12-button,
satin-finish brass

Flush mounting boxes

**41592**
2 modules**41593**
3 modules**41594**
4 modules**9192**
2 modules for
adaptor 41686**9193**
3 modules for
adaptor 41687

Patavium series: entrance panels

Adaptors

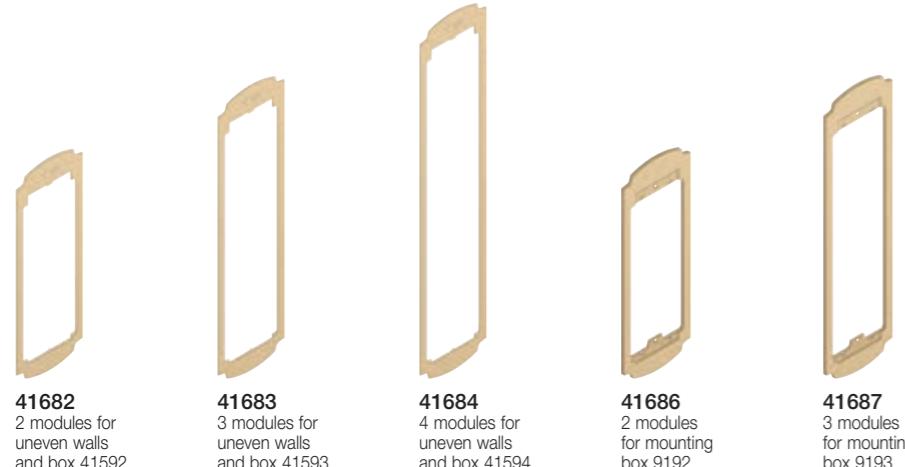


Steely series: entrance panels

Audio and audio/video electronic units




2-module audio/video and additional entrance plates

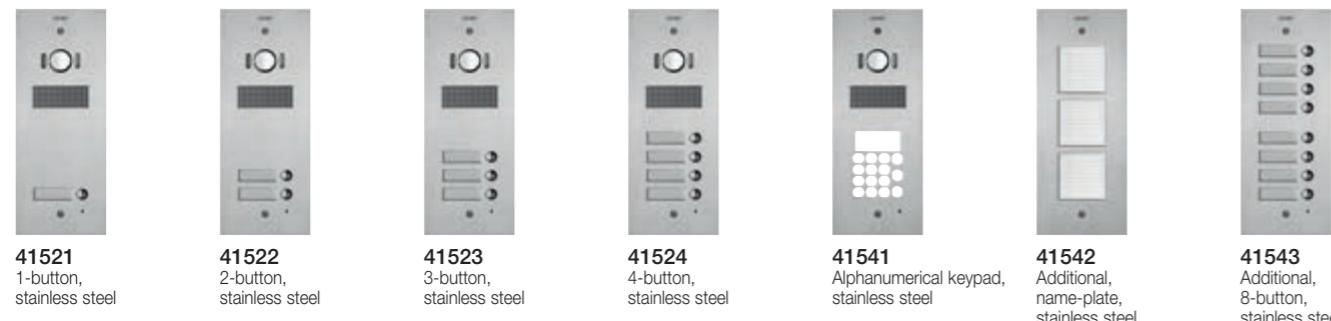


Steely series: entrance panels

3 and 4 modules audio/video entrance plates

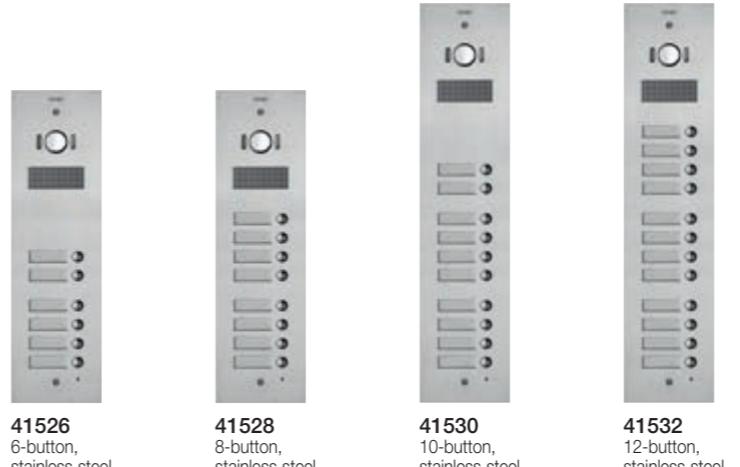

2-module audio and additional entrance plates

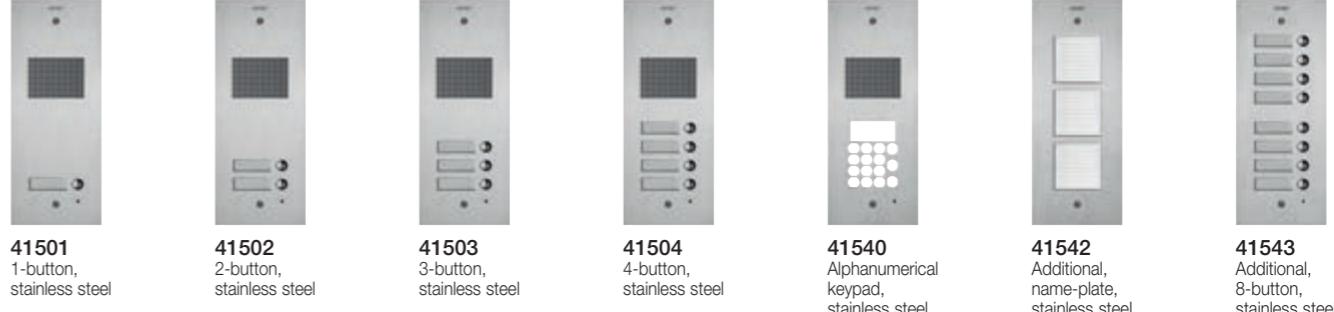

3 and 4 modules audio entrance plates



Steely series: entrance panels

1-module additional entrance plates

41595
Customisable
cover plate,
stainless steel41596
With 40x40 mm
hole,
stainless steel

Mounting boxes

41591
1 module41592
2 modules41593
3 modules41594
4 modules9191
1 module for
adaptor 415859192
2 modules for
adaptor 415869193
3 modules for
adaptor 41587

Mounting boxes for adaptor

Adaptors

41581
1 module for
uneven walls
and box 4159141582
2 modules for
uneven walls
and box 4159241583
3 modules for
uneven walls
and box 4159341584
4 modules for
uneven walls
and box 4159441585
1 module for
mounting box
919141586
2 modules for
mounting box
919241587
3 modules for
mounting box
9193

Tab series: video entryphones

Video entryphones

40517
Tab 7S Up - surface
mounting hands-free video
entryphone, integrated
Wi-Fi, 7" LCD display,
teleloop facility for hearing
aids, white40517.04
Tab 7S Up - surface
mounting hands-free video
entryphone, integrated
Wi-Fi, 7" LCD display,
teleloop facility for hearing
aids, black40505
Tab 7 - surface mounting
hands-free video entry-
phone, integrated
Wi-Fi, 7" LCD display,
teleloop facility for hearing
aids, white40515
Tab 5S Up - surface
mounting hands-free video
entryphone, integrated
Wi-Fi, 5" LCD display,
teleloop facility for hearing
aids, white

40515.04

Tab 5S Up - surface
mounting hands-free video
entryphone, integrated
Wi-Fi, 5" LCD display,
teleloop facility for hearing
aids, black7559
Tab Free 4.3 - surface
mounting hands-free
video entryphone, 4.3"
LCD display, keyboard
for intercom calls, tele-
loop facility for hearing
aids, white7558
As above, without inter-
com callApp Vimar View available on
Apple and Google Play store7549
Tab 4.3 - surface mounting
video entryphone with
handset, 4.3" LCD display,
teleloop facility for hearing
aids, white7548
Tab 4.3 - surface mounting
video entryphone with
handset, 4.3" LCD display,
teleloop facility for hearing
aids, white

Accessories

40596
Table box for Tab 7S Up
video entryphone40195
Table box for Tab 7
video entryphone40595
Table box for Tab 5S Up
video entryphone753A
Table mounting box,
white40591
Flush mounting box for
Tab 7S Up video entry-
phone for hollow walls
and masonry40590
Flush mounting box for
Tab 5S Up video entry-
phone for hollow walls
and masonry40196
Surface mounting frame
Tab 7 video entryphone753S
8-module support (4+4)
for 7549 surface
mounting755S
Surface mounting
frame Tab 4.3 video
entryphone753B
Interconnecting stud for
table mounting box

Tab series: entryphones

Entryphones and accessories




7509
Tab jr. - surface mounting entryphone with handset, white

7509/D
As above, facility for hard of hearing function

Voxie series: enterphones

Entryphones and accessories

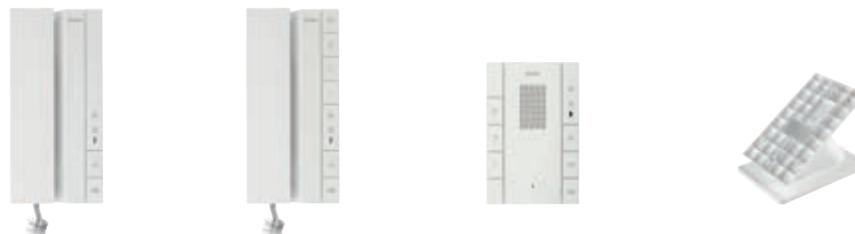

40540
Surface mounting entryphone with handset and 2 push buttons, white

40540.D
As above, with function for hearing aid wearers

40542
Surface mounting entryphone with handset and 6 push buttons, white

40547
Surface mounting hands-free entryphone with 7 push buttons, white

40598
Table mounting box, white

Additional devices

Porter switchboard



40510
Porter switchboard with 7" LCD monitor, electronic contact list, calls and alarms displaying and management and services programmes

Power supplies



40100
Entry system supply unit, 28 Vdc, 110-240 V~ 50/60 Hz



40110
Video entry system supply unit, 28 Vdc, 110-240 V~ 50/60 Hz



6923
Additional video entry system supply unit, 28 Vdc, 230 V~ 50/60 Hz 15 VA



41021
Line adaptor for connecting power supply unit 6923 and Pixel entrance panel



6582.1
Additional supply unit for LED and cameras, 10,5 Vdc, 13,5 Vdc and 18 Vdc, 230 V~ 50/60 Hz 35 VA



40190
Due Fili Plus supply unit terminal cover kit

Due Fili Plus + Digibus interface



69DM
Due Fili Plus pillar Digibus back interface

69DM.EN
As above, English version

Expansion interface



69RS.1
Expansion interface to manage up to 200 inner stations

Separator



692S.1
Separator for dividing conversation areas

Pillar divider



69DV
Pillar divider for 4 pillar lines



69DV/5
Pillar divider for 4 pillar lines for category 5 system

Additional devices

Video distributor

**692D**
Passive floor distributor
for adapting video signal
impedance**691D**
Passive floor distributor
for adapting video signal
impedance with single
shunting towards an
indoor station**40161**
Passive floor distributor
for adapting video signal
impedance

Ground divider

**692G**
Galvanic insulating
device for video signal

Concentrators and selectors

**69MX**
Concentrator for up to
4 entrance panels par-
allel connection**69MX/5**
Concentrator for up
to 4 entrance panels
parallel connection for
category 5 system**69AM/T**
Video selector for
4 cameras in the
system**69AM/T4**
Video selector for
4 cameras, allows
expansion of the
number of cameras

Amplifiers

**692M**
Video signal riser
amplifier**692M/5**
Video signal riser amplifier
for category 5 system

Audio/video converter

**69MD**
Interface for Digital/
audio-video signal
change for users

Additional devices

Relays

**69PH**
Programmable device
with 2 x 6 A 230 V-
change-over relays
operating in line with
separate or correlated
programming**69RH**
Programmable device
with 2 NO 3 A 230 V-
relays for 2 independent
auxiliary controls**69RH/L**
Programmable device
with 2 NO 3 A 230 V-
time-delay relays**0170/101**
3 A 230 V- change-over
relay for call repetition**0170/001**
3 A 230 V- change-over
relay, power supply
12 Vdc or Vac

Electronic chime

**860A**
With different calls for
2 entrances, 230 V-**860A.240**
As above, 240 V-

Cables

**732H.E.100**
Cable for internal
laying, PVC-sheath,
Eca, 100 m**732I.E.100**
Cable for external
laying, LSZH-sheath,
Eca, 100 m**732I.C.100**
Cable for external
laying, LSZH-sheath,
Cca - s1b, 100 m**732H.E.500**
As above,
500 m**732I.E.500**
As above,
500 m

Protection device

**692E**
Overvoltage
protection device

Interfaces

**692I/U**
PC interface with USB
port and software for
system configuration**6120**
Interface for
2 remote controls**40164**
Telephone interface for
Due Fili Plus entryphones
and video entryphones

Due Fili Plus - 1-family pre-programmed video entry system kits



K4017.R
Kit comprises:
- 1 Roxie series surface or flush mounting entrance panel with 1 button (40171) and access control reader;
- 5 Mifare RFID cards;
- 1 Tab 7S Up hands-free video entryphone, white with integrated Wi-Fi for the remote control of the call on smartphone (40517);
- 1 supply unit (40110)



K4017G.01
Kit comprises:
- 1 1-module 1-button Pixel series entrance panel, grey (41131.01+41105.01);
- 1 audio/video electronic unit with teleloop and wide-angle camera (41005);
- 1 flush mounting box (9191);
- 1 Tab 7S Up hands-free video entryphone, white with integrated Wi-Fi for the remote control of the call on smartphone (40517);
- 1 supply unit (40110)



K4017.E
Kit comprises:
- 1 series 1300/E flush mounting or surface mounting anodised aluminium entrance panel (40151);
- 1 audio/video electronic unit (40135);
- 1 flush mounting box (9191);
- 1 Tab 7S Up hands-free video entryphone, white with integrated Wi-Fi for the remote control of the call on smartphone (40517);
- 1 supply unit (40110)

Due Fili Plus - 1-family pre-programmed video entry system kits



7558/E
Kit comprises:
- 1 series 1300/E flush mounting or surface mounting anodised aluminium entrance panel (40151);
- 1 audio/video electronic unit (40135);
- 1 Tab Free 4.3" hands-free video entryphone, white (7558);
- 1 supply unit (40110)



K7549.R
Kit comprises:
- 1 Roxie series surface or flush mounting entrance panel with 1 button (40171) and access control reader;
- 5 Mifare RFID cards;
- 1 Tab 4.3" hands-free video entryphone with handset, white (7549);
- 1 supply unit (40110)



K40515.R
Kit comprises:
- 1 Roxie series surface or flush mounting entrance panel with 1 button (40171) and access control reader;
- 5 Mifare RFID cards;
- 1 Tab 5S Up hands-free video entryphone, white with integrated Wi-Fi for the remote control of the call on smartphone (40515);
- 1 supply unit (40110)



K40515G.01
Kit comprises:
- 1 1-module 1-button Pixel series entrance panel, grey (41131.01+41105.01);
- 1 audio/video electronic unit with teleloop and wide-angle camera (41005);
- 1 flush mounting box (9191);
- 1 Tab 5S Up hands-free video entryphone, white with integrated Wi-Fi for the remote control of the call on smartphone (40515);
- 1 supply unit (40110)



K40515.E
Kit comprises:
- 1 series 1300/E flush mounting or surface mounting anodised aluminium entrance panel (40151);
- 1 audio/video electronic unit (40135);
- 1 flush mounting box (9191);
- 1 Tab 5S Up hands-free video entryphone, white with integrated Wi-Fi for the remote control of the call on smartphone (40515);
- 1 supply unit (40110)

Due Fili Plus - 1-family pre-programmed audio entry system kit



7509/M
1-family kit comprises:
- 1 surface/flush mounting 1300 series entrance panel (13K1), with 1 additional button R131;
- 1 audio electronic unit (13F1);
- 1 Tab jr. entryphone (7509);
- 1 supply unit (40100)



App Vimar View available on
Apple and Google Play store



K40505.R
Kit comprises:
- 1 Roxie series surface or flush mounting entrance panel with 1 button (40171) and access control reader;
- 5 Mifare RFID cards;
- 1 Tab 7 hands-free video entryphone, white (40505);
- 1 supply unit (40110)



K40505G.01
Kit comprises:
- 1 1-module 1-button Pixel series entrance panel, grey (41131.01+41105.01);
- 1 audio/video electronic unit with teleloop and wide-angle camera (41005);
- 1 flush mounting box (9191);
- 1 Tab 7 hands-free video entryphone, white (40505);
- 1 supply unit (40110)



K7549.R
Kit comprises:
- 1 Roxie series surface or flush mounting entrance panel with 1 button (40171) and access control reader;
- 5 Mifare RFID cards;
- 1 Tab Free 4.3" hands-free video entryphone, white (7559);
- 1 supply unit (40110)



K7559G.01
Kit comprises:
- 1 1-module 1-button Pixel series entrance panel, grey (41131.01+41105.01);
- 1 audio/video electronic unit with teleloop and wide-angle camera (41005);
- 1 flush mounting box (9191);
- 1 Tab Free 4.3" hands-free video entryphone, white (7559);
- 1 supply unit (40110)



K40540.E
1-family kit comprises:
- 1 audio electronic unit (40131);
- 1 one-family audio cover plate (40141), 1-module flush mounting box (91K1);
- 1 Voxie handset entryphone with 2 push buttons (40540);
- 1 power supply unit (40100)



K40542.E
1-family kit comprises:
- 1 audio electronic unit (40131),
- 1 one-family audio cover plate (40141), 1-module flush mounting box (91K1),
- 1 Voxie handset entryphone with 6 push buttons (40542);
- 1 power supply unit (40100)




K40547.E
1-family kit comprises:
- 1 audio electronic unit (40131),
- 1 one-family audio cover plate (40141), 1-module flush mounting box (91K1),
- 1 Voxie hands-free entryphone with 7 push buttons (40547);
- 1 power supply unit (40100)



IP Technology, a limitless system.

A system based on IP technology enables it to go beyond the limits of traditional video door entry systems: enhanced performance levels, multiple audio/video communication between indoor stations and outdoor stations and a potentially infinite number of users. All this is made completely simple, also through the use of existing LAN networks, without laying any specific wiring.

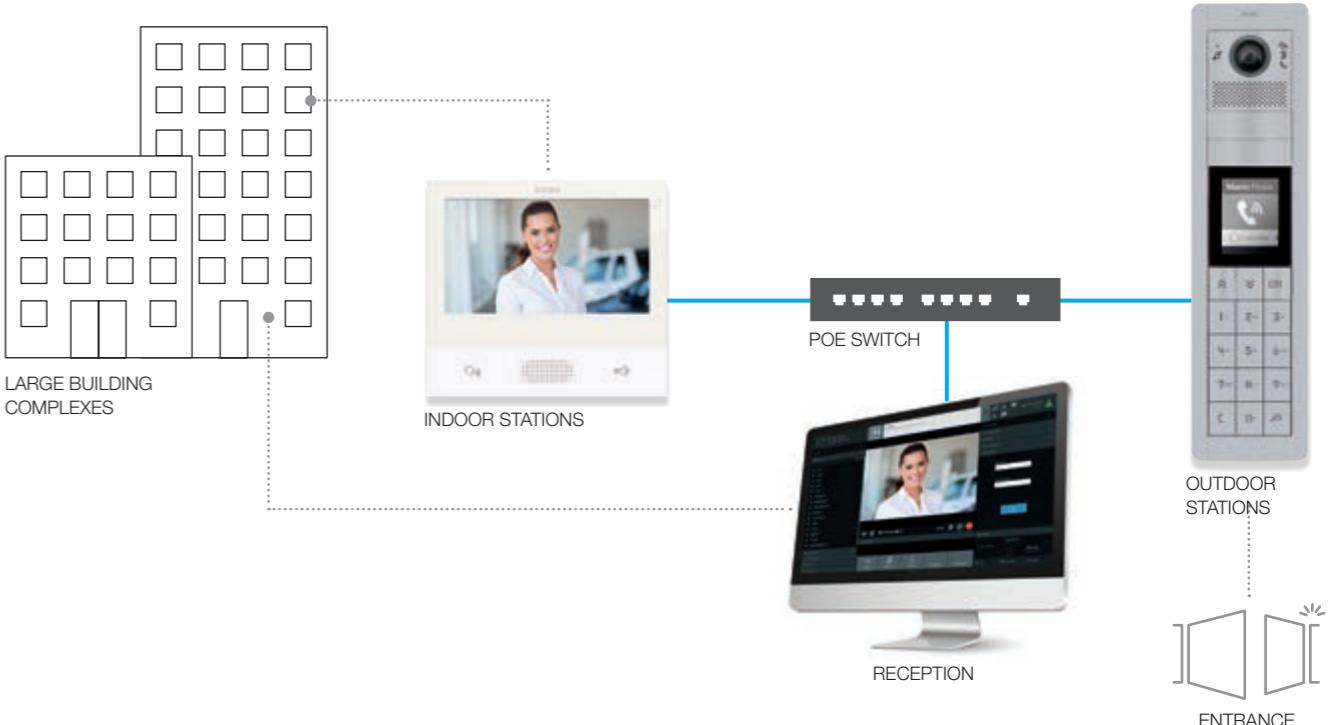

Incomparable expansion.

With IP technology, the video door entry systems can be expanded to include a large number of users. Expansion is as easy and simple as initial installation: quick and functional, also through the use of dedicated or existing shared LAN networks, where present.

Full coverage.

Performance is enhanced, and audio and video signal quality is guaranteed and protected, whatever the size of the building complex. For efficient, high-performance communication.

Simple configuration.

Self-configuring for kits, or configurable using the Video Door IP Manager software from a PC for all installations, from the simplest to the most complex, all made simple by the autodiscovery function for Elvox IP video door entry system devices. Installation is always quick and functional, supporting the needs of professionals.

Remote management by smartphone and tablet.

The restyled **Vimar View** App allows you to receive a video entryphone call, see the video surveillance cameras (if any are connected) or even open your door directly from your smartphone or tablet, wherever you are.




Guaranteed reliability.

The system data is replicated on the different devices, ensuring constant system operation. Everything is always under control efficiently and securely. Thanks to the new **IP Gateway** you can intervene remotely on the outdoor station operating parameters and manage the access control credentials.


Scalability and versatility.

The IP video door entry system was designed to respond in the simplest way to the needs of all kinds of buildings and their growing needs.

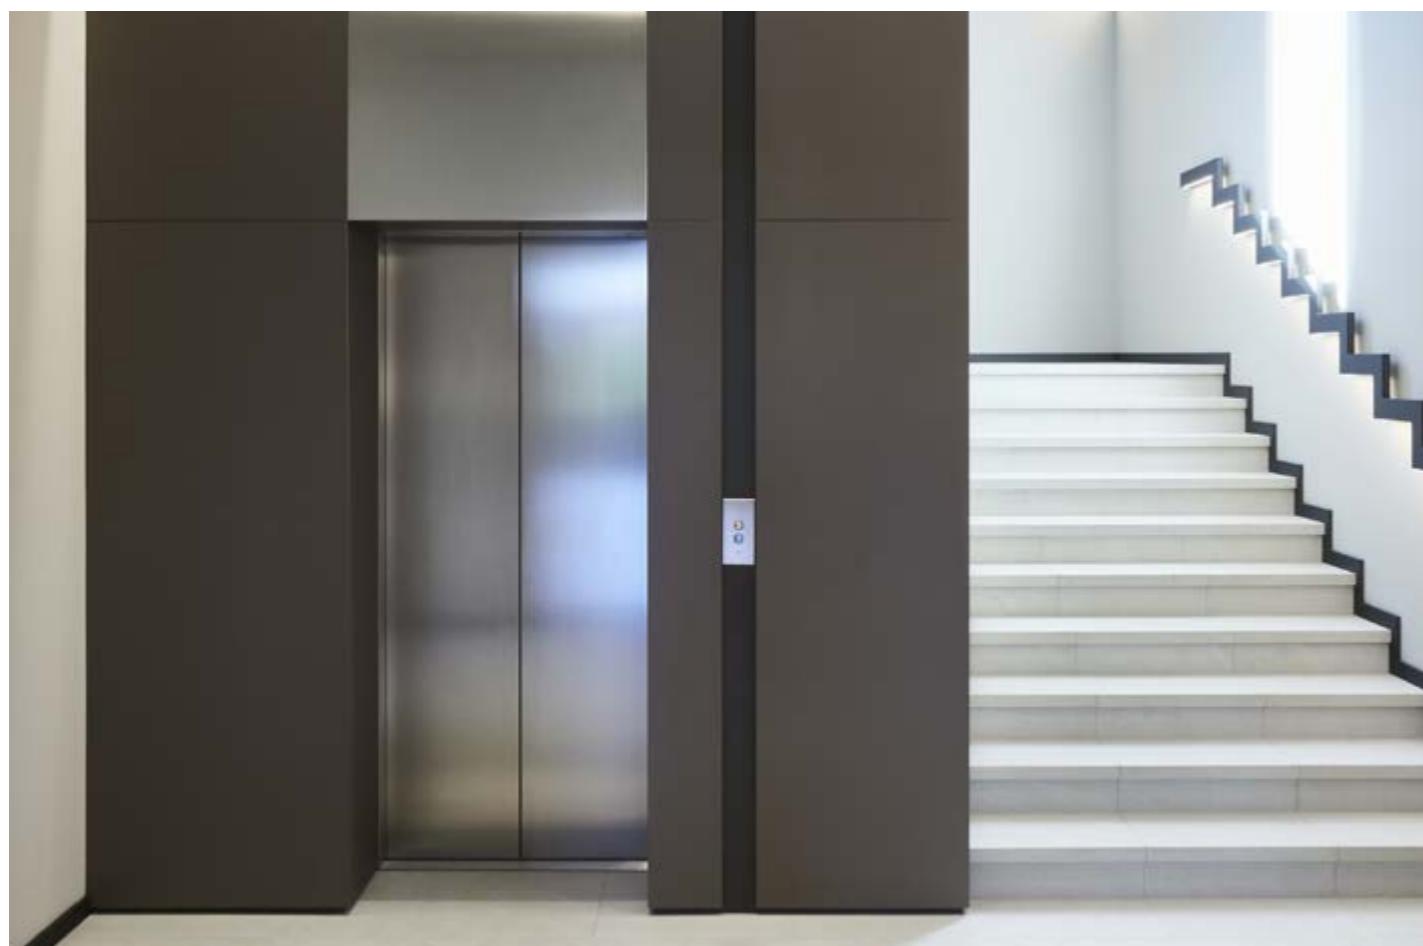

Controlling lifts in systems with IP technology.

New lift interface for IP video door entry systems with Ethernet network infrastructure. In response to the actions of the user or reception switchboard, it allows lifts to reach the desired floors based on certain system events (e.g. door opening following a call to the apartment, access via badge or keypad code, call from indoor station or switchboard).

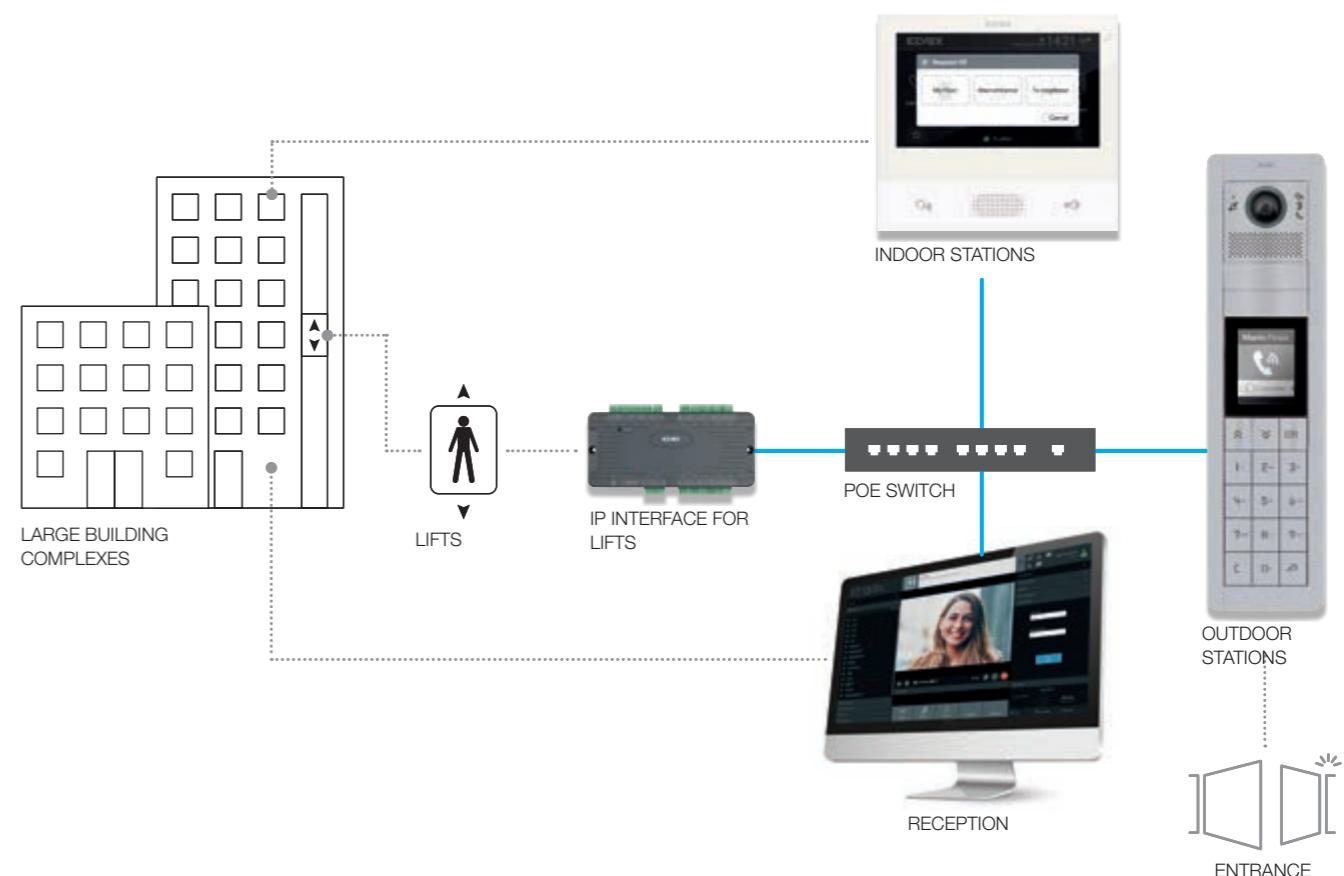

Applications.

The lift control interface is designed to extend the functions of the video door entry system, allowing: the lift to be called from the indoor station, access to reserved floors by way of user recognition via code or badge, "No visitor on the wrong floor" limited and controlled visitor access and lift management from reception.

Expandability.

Up to 16 interfaces can be connected in the same system, powered by the Ethernet network via PoE technology. Each interface has a matrix with 16 relays which can be controlled individually, for a total of 256 relays.

"Fire switch" safety.

The interface can be connected to the fire alarm system, to switch off when the alarm is triggered and reactivate once the alarm has been silenced, to return to its normal operation.

Simple configuration.


The interfaces are configurable using the Video Door IP Manager software from a PC for all installations, from the smallest to the most complex, all made simple by the autodiscovery function for Elvox IP video door entry system devices. Installation is always quick and functional, supporting the needs of professionals.

Indoor stations and reception switchboard.

The Tab 7S IP, Tab 7 IP hands-free video entryphone and the IP reception switchboard have been integrated with new menus to manage new functions for lift calls.

Riserless IP technology, with call service via Cloud.

Video door entry systems with riserless IP technology forward directly the video door entry calls from the outer unit to the smartphone by **Vimar View** app, without the need for a physical internal unit in the apartment. This is possible because a gateway and a licenses kits for audio / video calls have been installed.

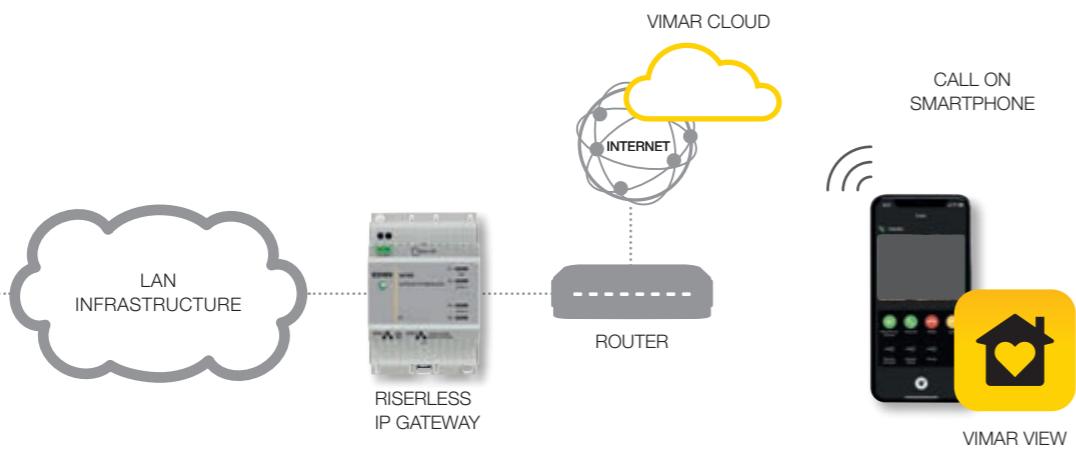

Up to 1600 calls.

In the same IP system, it is possible to install up to **16 riserless IP gateways**, each gateway can manage calls **from 100 apartments** and up to **5 mobile devices** (e.g. smartphones) per apartment, which can simultaneously receive the same call.

Call licenses.


Loading the licenses into the riserless gateway, it allows the audio / video calls from outer units to mobile devices by **Vimar View** app.

User remote control with smartphone and tablet.

The **gateway** and **Vimar View** app allow the following video door entry functions from mobile devices: receive calls, activate the outer units or a CCTV camera from smartphone, activate the outer unit lock, activate auxiliary services, communicate with the porter switchboard if present, send and receive text messages from the porter.

View Vimar portal, for the management of riserless IP systems.

The **management, configuration and use of riserless IP video door entry systems** takes place through a new dedicated Web portal and some specific person, which interact with the system: plant manager, installer and user.

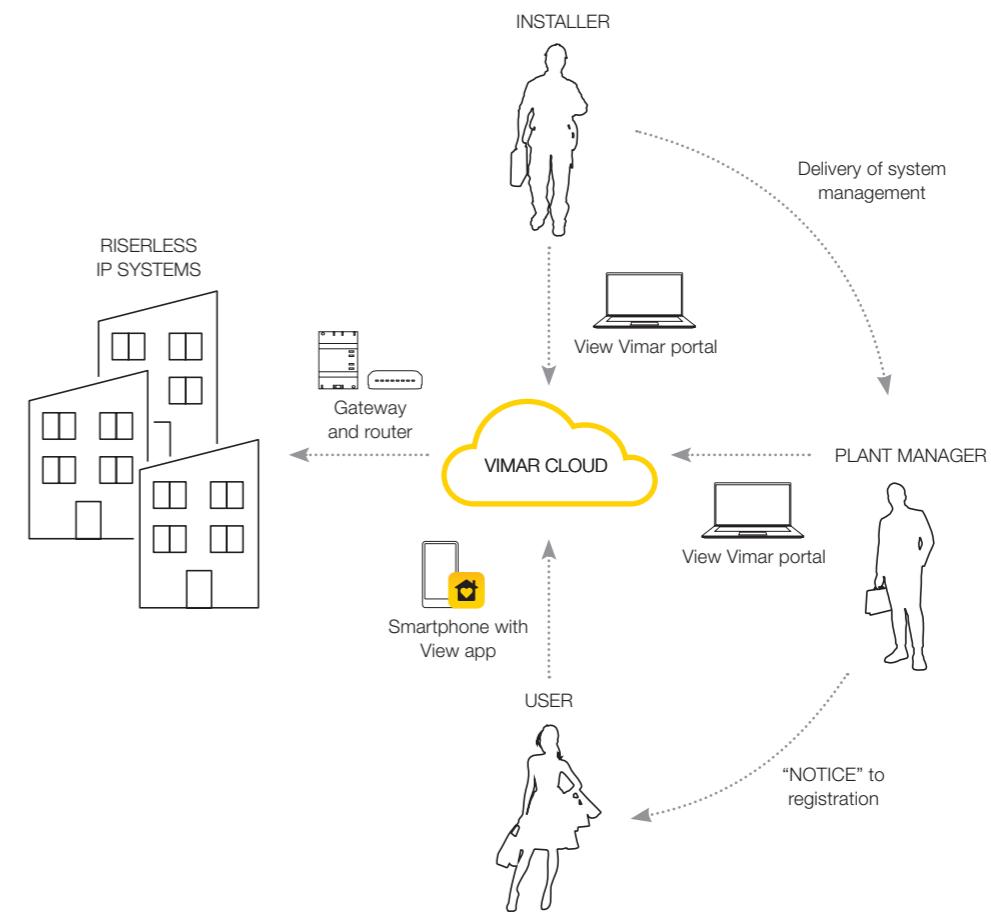

Plant manager remote management.

The registrations and access credentials of users and apartments are managed by the system administrator through **View Vimar portal** that enables remote management of multiple systems.

Guaranteed reliability.

The system data is replicated on the different devices, ensuring constant system operation. Everything is always under control.

Scalability and versatility.

The IP video door entry system was designed to respond in the simplest way to the needs of all kinds of buildings: from single homes to large residential complexes.

ADVANTAGES

Installer.

The installer can offer solutions to replace "old" intercom systems with smart video door systems (retrofit of multi-wire audio system), without removing the existing cables in the riser. The new cabling will be reserved only for the horizontal IP backbone between the entrance panels, IP cameras, IP input / output devices and Ethernet switches.

From the new View Vimar portal, the installer can remotely interact with the systems for maintenance and management of access permissions.

Plant manager.

The plant manager can remotely supervise multiple systems, give administration roles of single systems to other operators, manage user data, send via e-mail to users the request for registration to the system, send general messages to users, enable and disable user system credentials, manage access control credentials and manage the licenses assigned to single system.

To each license can be associated up to 5 mobile devices, which answer simultaneously to the same calls.

User.

Users with smartphones and View app can use the following video door entry functions: answer entrance panel and porter switchboard calls, activate the door lock and auxiliary services (switch on staircase lights, garden irrigation, etc.), switch on the entrance panel, view the video surveillance cameras (if connected), communicate with the porter switchboard if present, send and receive text messages from the porter. Each user can simultaneously receive calls on 5 different mobile devices, for each member of the family.

Elvox IP video door entry system with wired inner units

The system guarantees the functions described using the articles in the catalogue for all the following cases, also in combination:

- installation with less than 200 connected devices, i.e. objects connected to the same LAN network via an RJ45 interface, do not calculate IP CCTV cameras and switch;
- installation with up to maximum 3 video reception switchboards;
- management of access control services with standard articles from the catalogue up to 500 users;
- management of up to a maximum 10 video answering machine messages for each reception switchboard installed.

For all other cases and for the integration of third party products/systems, such as VoIP devices with SIP protocol, IP CCTV systems, advanced access control systems, please contact the sales network to consider customized solutions agreed with the system managers. The IP CCTV cameras can not be installed with the entrance panel to operate as call function service.

Elvox IP riserless video door entry system with call service via Cloud


The system guarantees the functions described using the articles in the catalogue for all the following cases, also in combination:

- installation with less than 200 connected devices, i.e. objects connected to the same LAN network via an RJ45 interface, do not calculate IP CCTV cameras and switch;
- installation with network server for more than 200 devices connected to LAN network.

The files are available and free for download on www.vimar.com;

- installation with maximum 16 riserless IP gateways for IP video door entry system to Vimar Cloud connection; each riserless IP gateway manages up to 100 calls and for each call it is matchable up to 5 mobile with Vimar View app, which answer to the same call simultaneously;
- calls towards the mobile devices are possible with the licenses installation and the authorization by the plant manager;
- installation can be managed from porter video switchboard;
- management of access control services with standard articles from the catalogue up to 1600 users;
- management of up to a maximum 10 video answering machine messages for each reception switchboard installed.

For all other cases and for the integration of third party products/systems, such as VoIP devices with SIP protocol, IP CCTV systems, advanced access control systems, please contact the sales network to consider customized solutions agreed with the system managers. The IP CCTV cameras can not be installed with the entrance panel to operate as call function service.

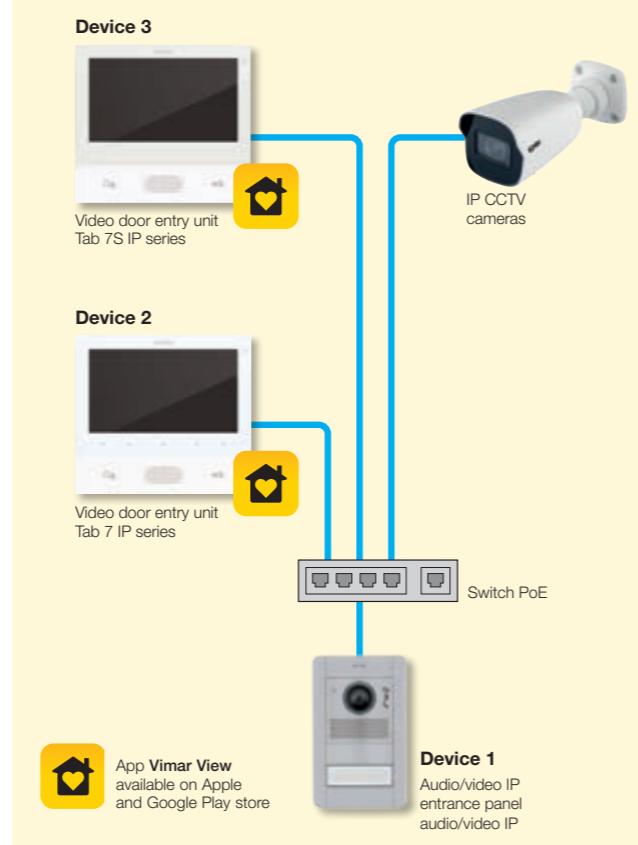Installation of up to 200 devices**Switch for the Elvox IP video door entry system**

The Elvox IP video door entry system should be completed with switch that manages the traffic of the LAN network. For a correct system operating, it is recommended the use of switch conform to the network characteristics of the current catalogue.



Installation of the passive network

To realize the infrastructure of passive network for the IP video door entry system, it is recommended to install the Vimar Netsafe structured cabling system with a wide range of products able to realize networks in 5e, 6 and 6A categories, shielded or unshielded in copper or fiber optic connections.

A system with great performances, offering versatile solutions for wide-ranging installations and assuring steady connections over time and for every kind of buildings, from the smallest in residential sector to the biggest to the tertiary sector. For more information browse on the site www.vimar.com.

Network technical data



Power supply from Ethernet network	PoE, class 0 (IEEE 802.3-2012)
Network interface	RJ45 Ethernet 10/100 Mps (certified)

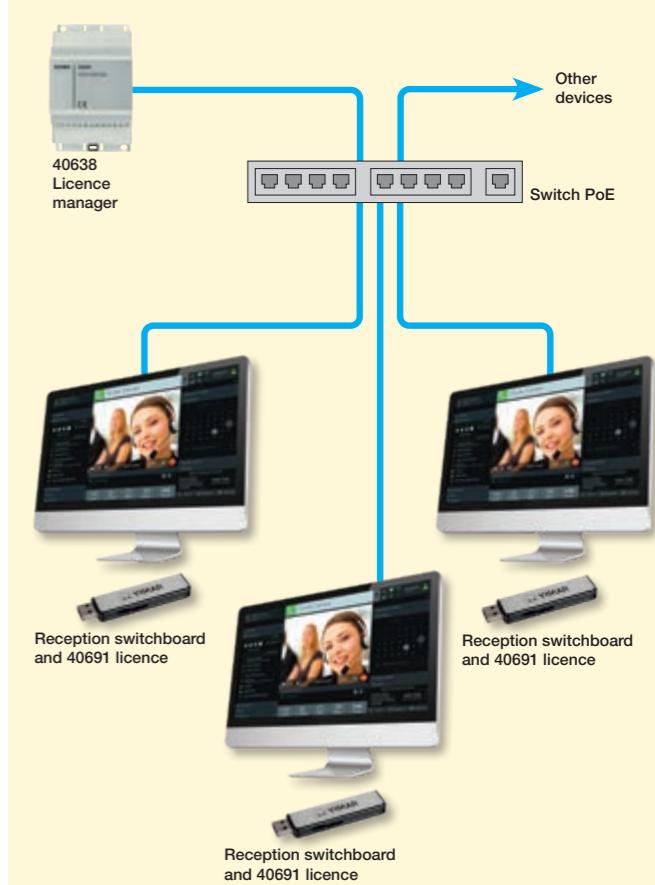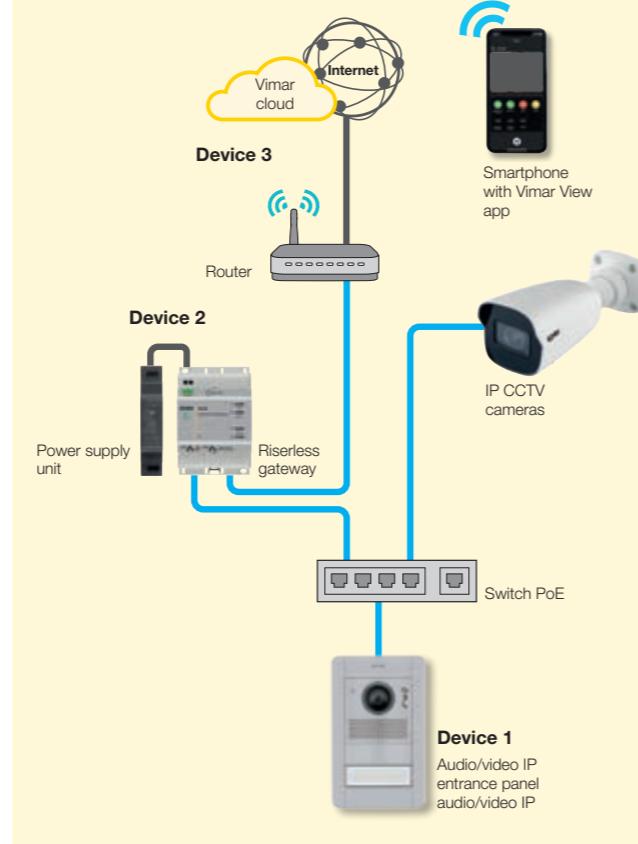Installation of up to 3 reception switchboards**Riserless installation**

IP video door entry system.



Main devices:

- Entrance panels (external stations)
- PoE switch

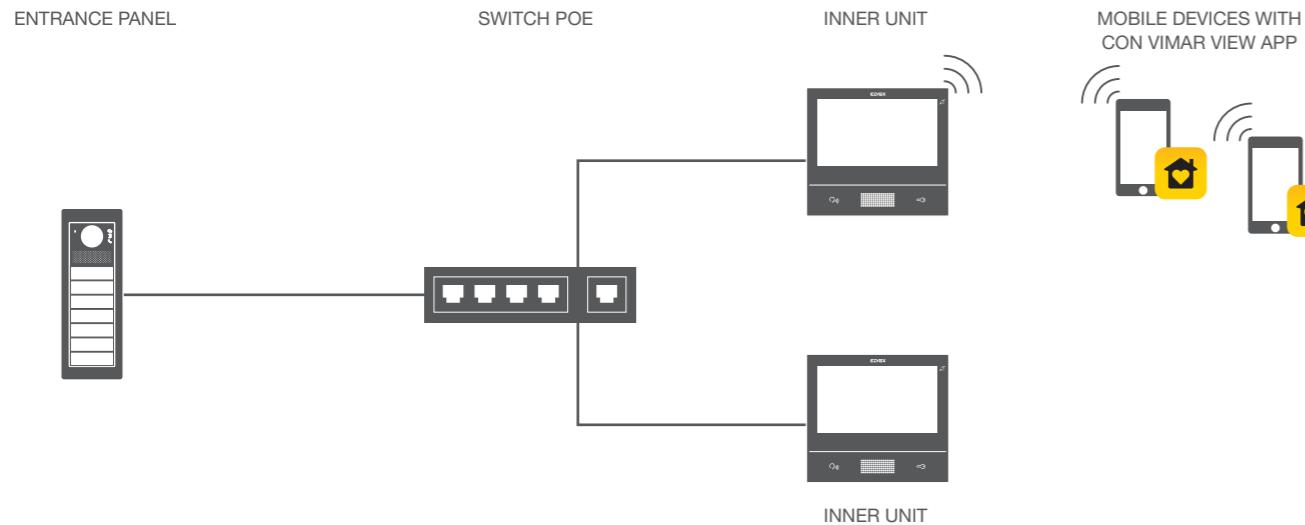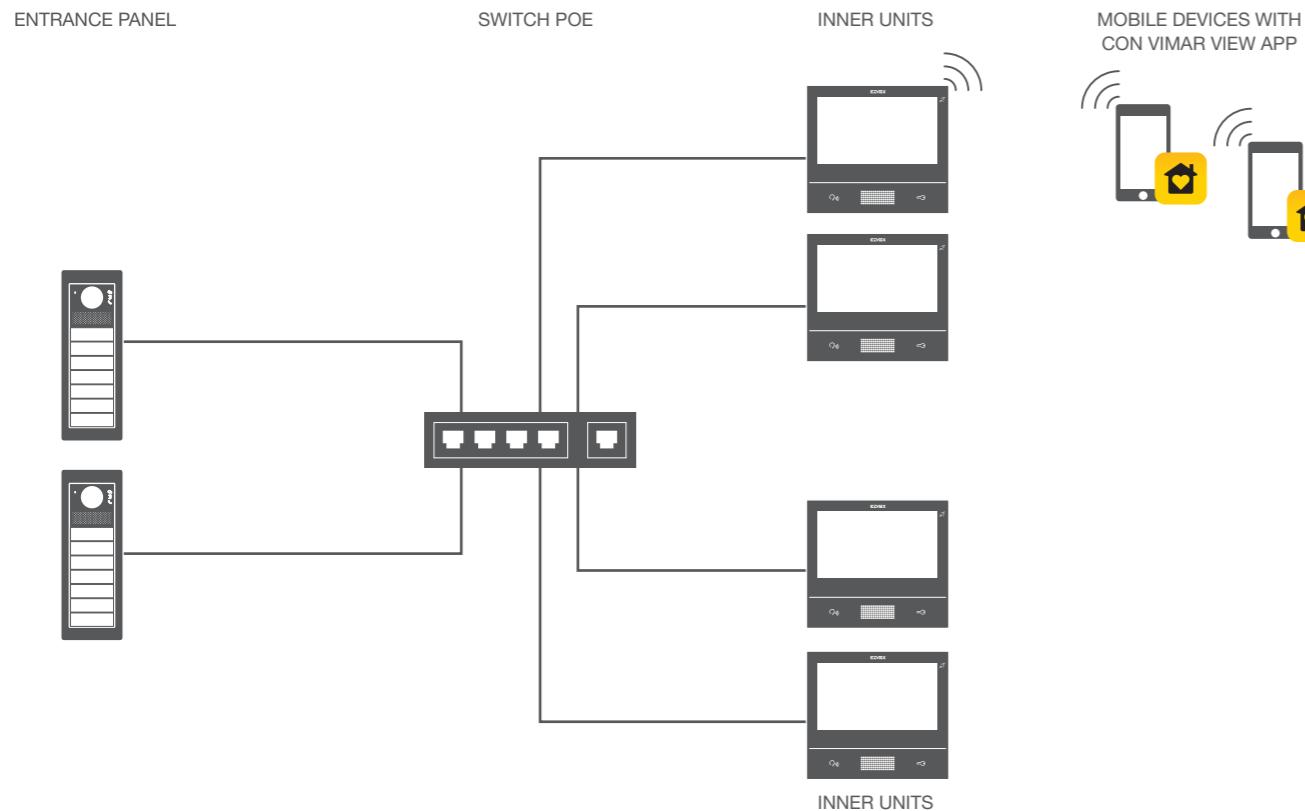With one entrance panel.

With many entrance panels.

Riserless video system with call service via Cloud.

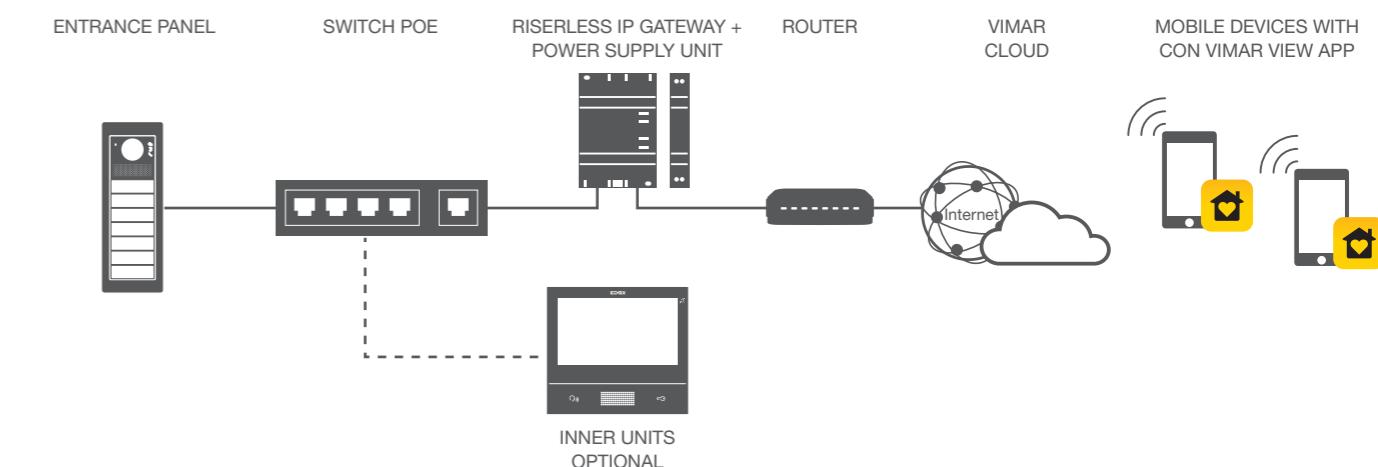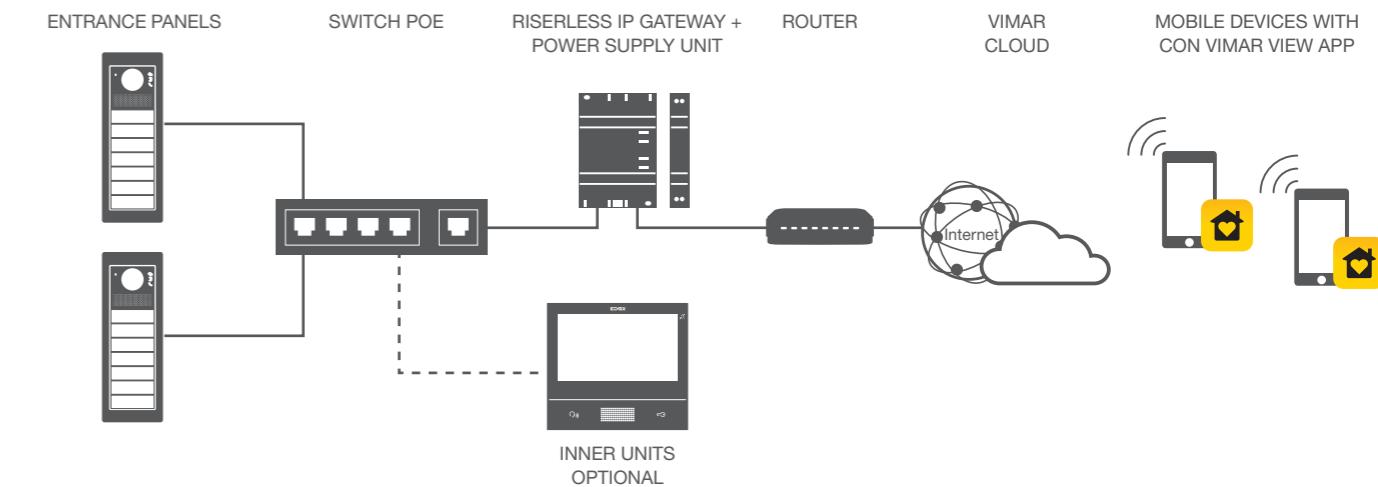Main devices:


- Entrance panels (external stations)
- PoE switch
- Riserless IP gateway with power supply unit
- Router

With one entrance panel.

With many entrance panels.


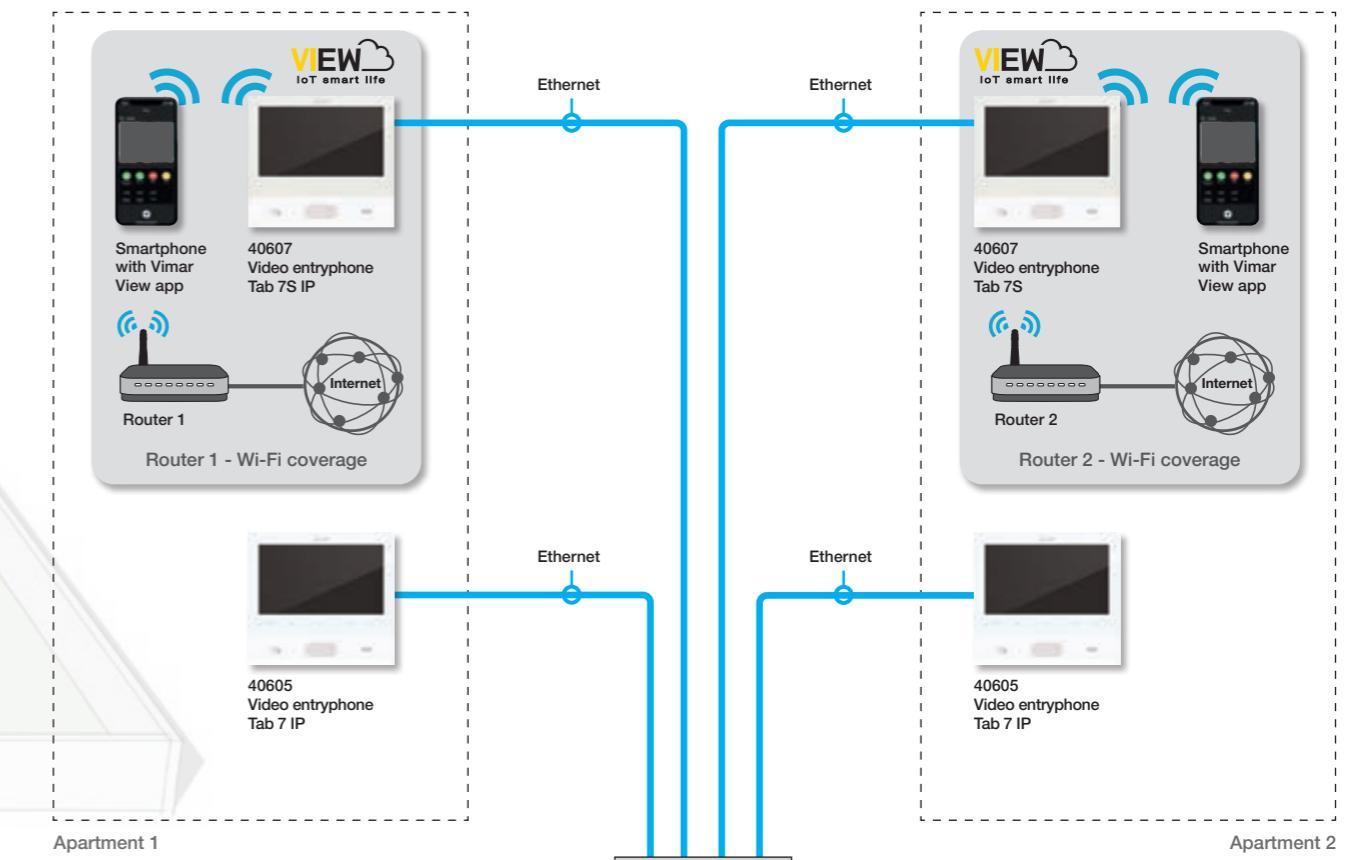
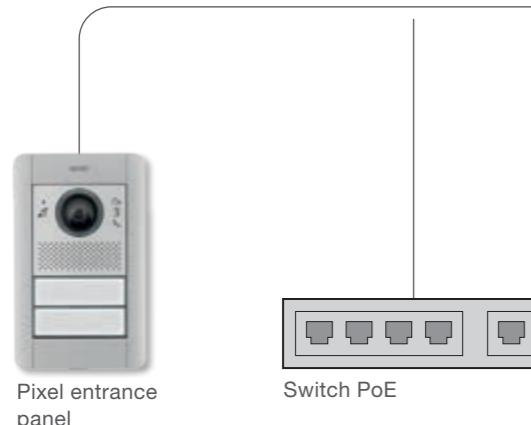
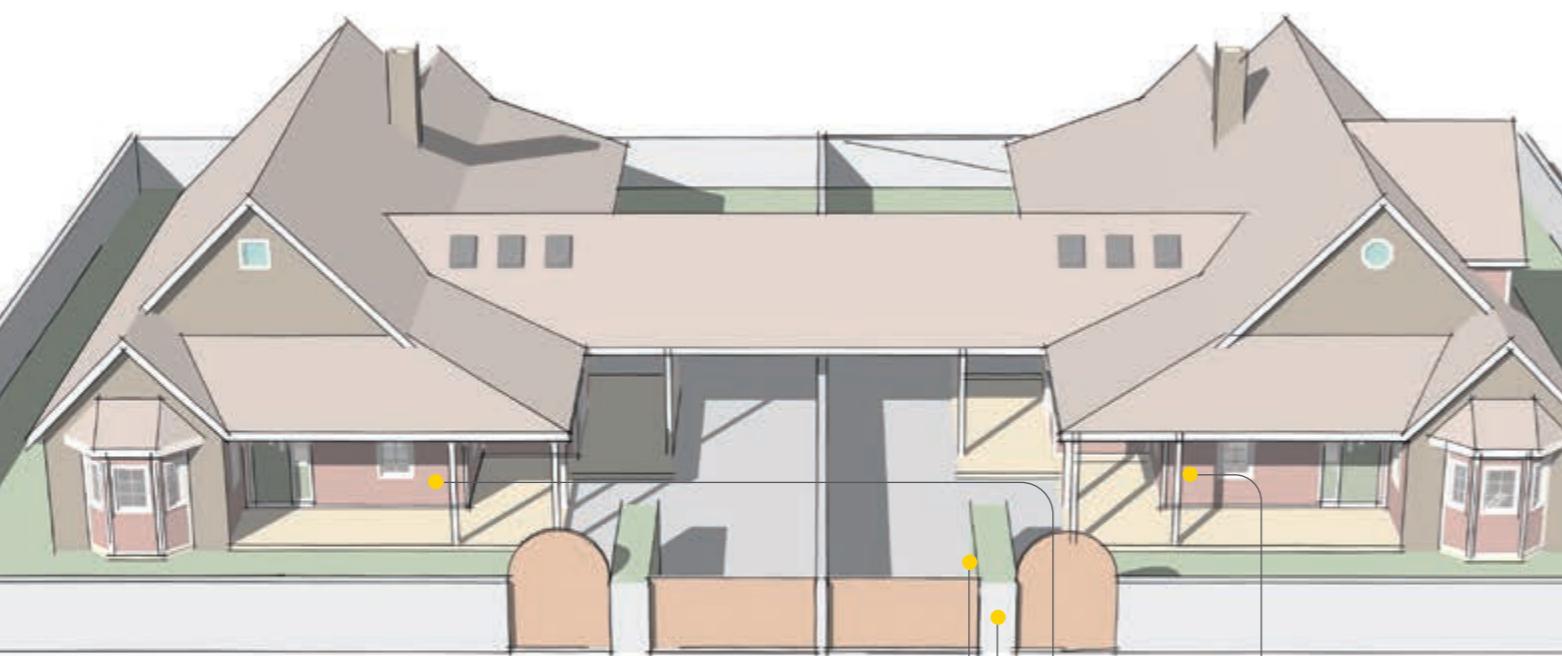
Villa with video door entry system.

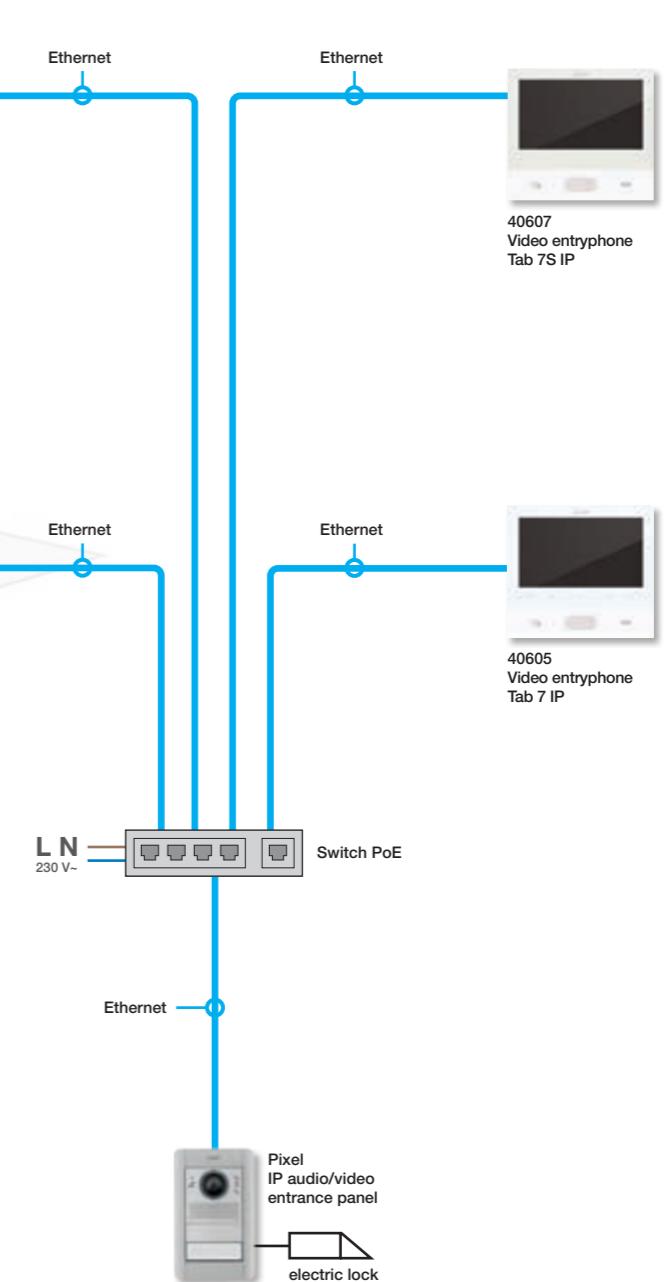

Note: example of standard installation on dedicated video door entry system LAN network. The passive structured cabling and active components may vary depending on the type of network defined for each specific application.





Semi-detached villa with video door entry system.






Note: example of standard installation on dedicated video door entry system LAN network. The passive structured cabling and active components may vary depending on the type of network defined for each specific application.

Residential complex with video door entry system with up to 200 devices.

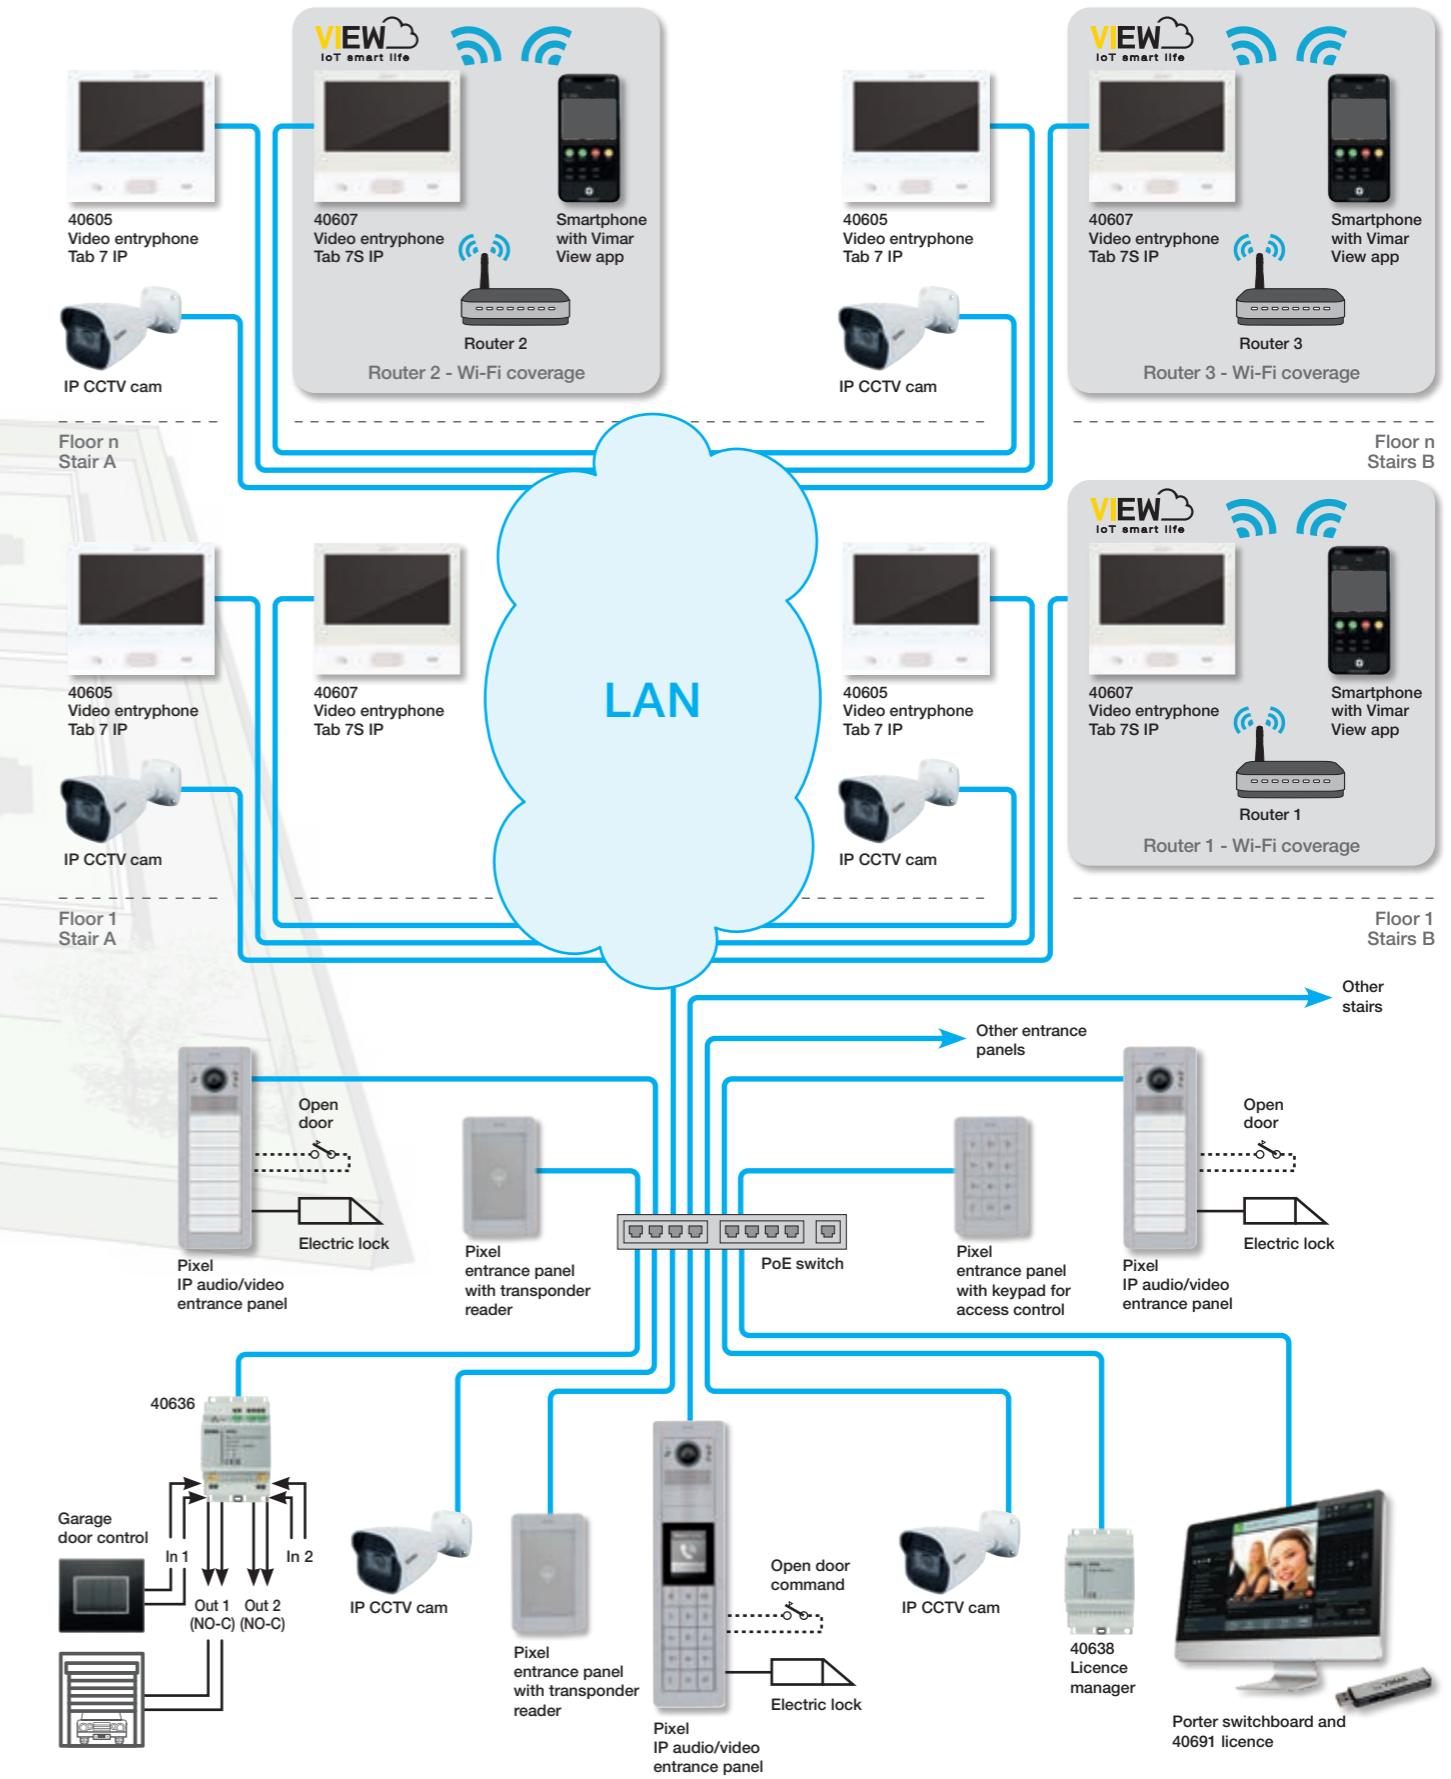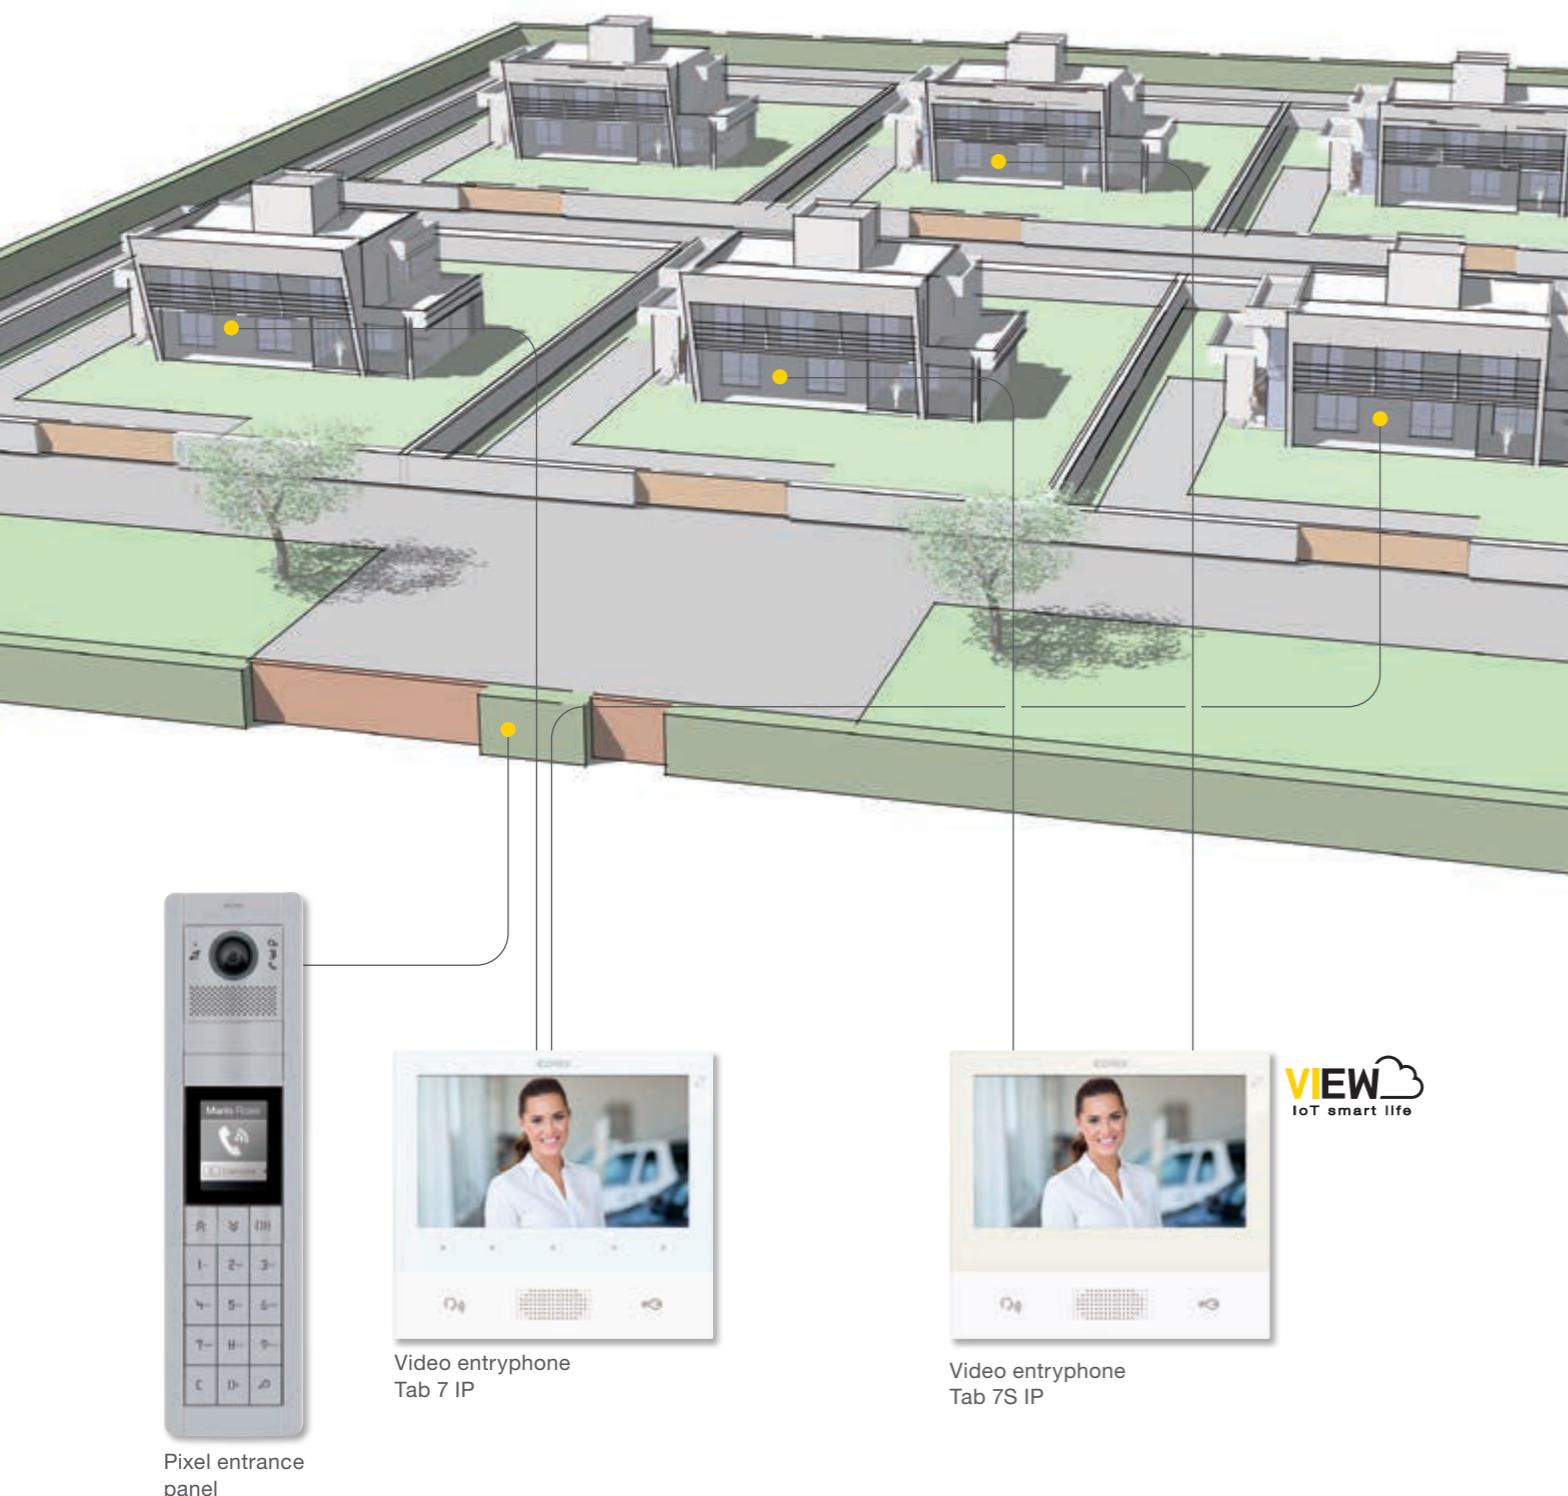




Note: example of standard installation on dedicated video door entry system LAN network. The passive structured cabling and active components may vary depending on the type of network defined for each specific application.

Villa with call service via Cloud.

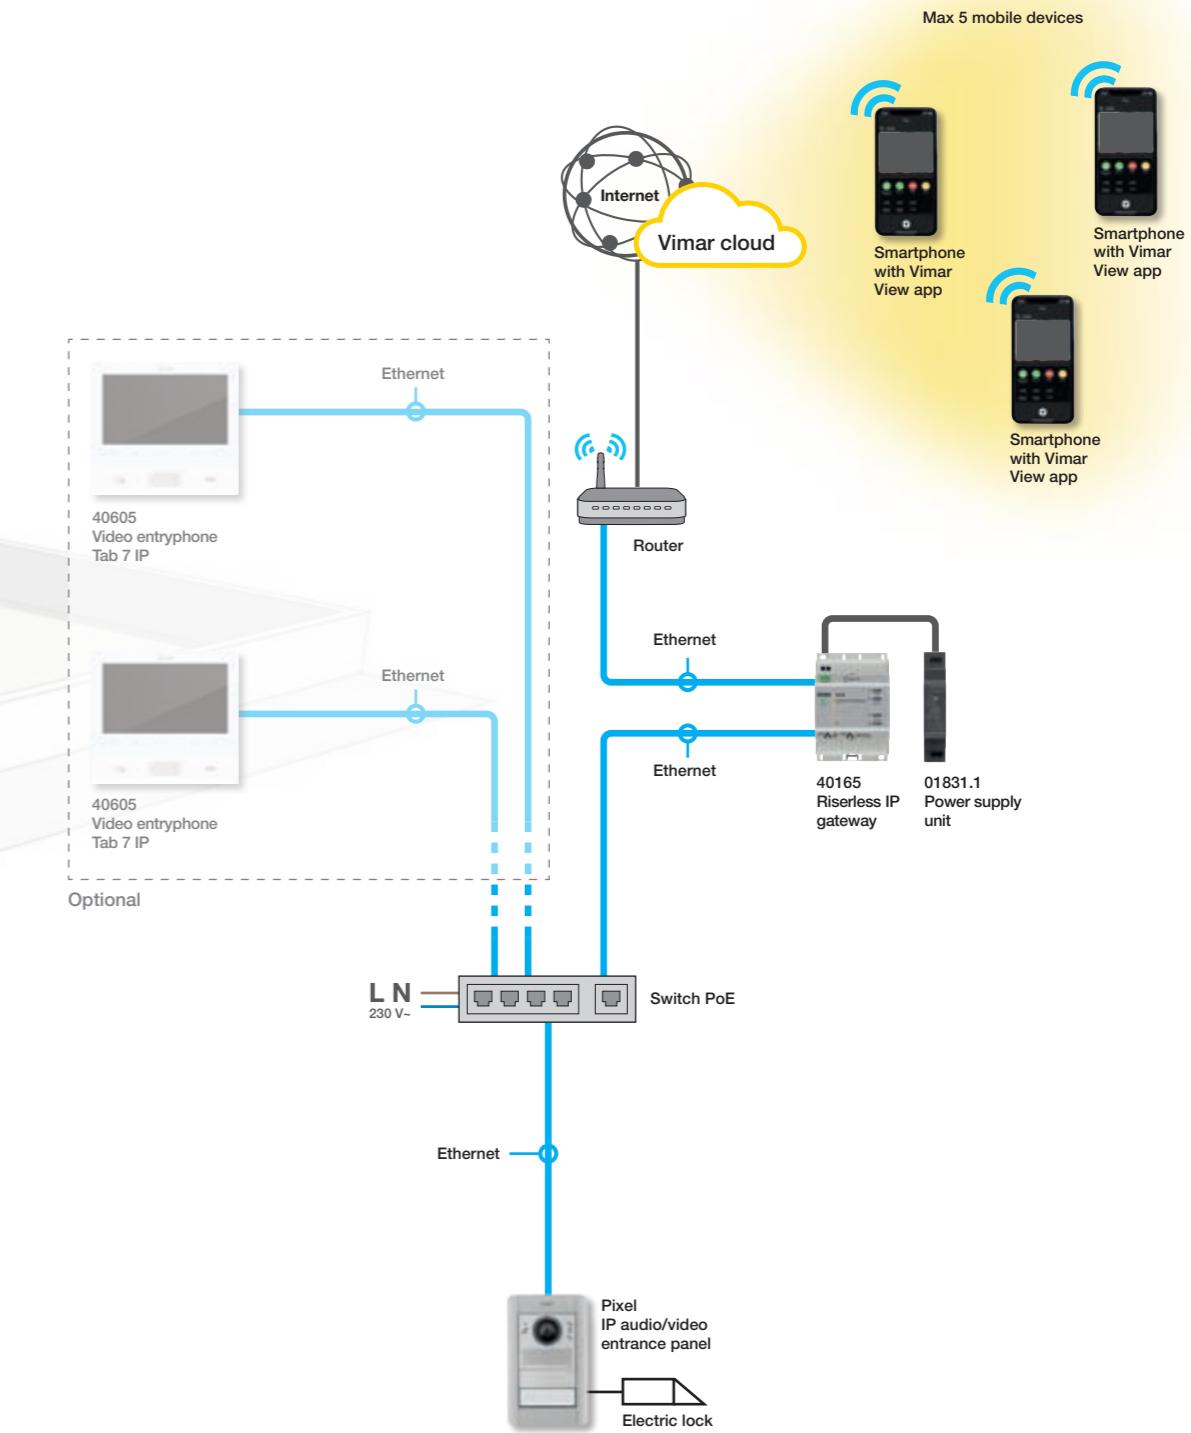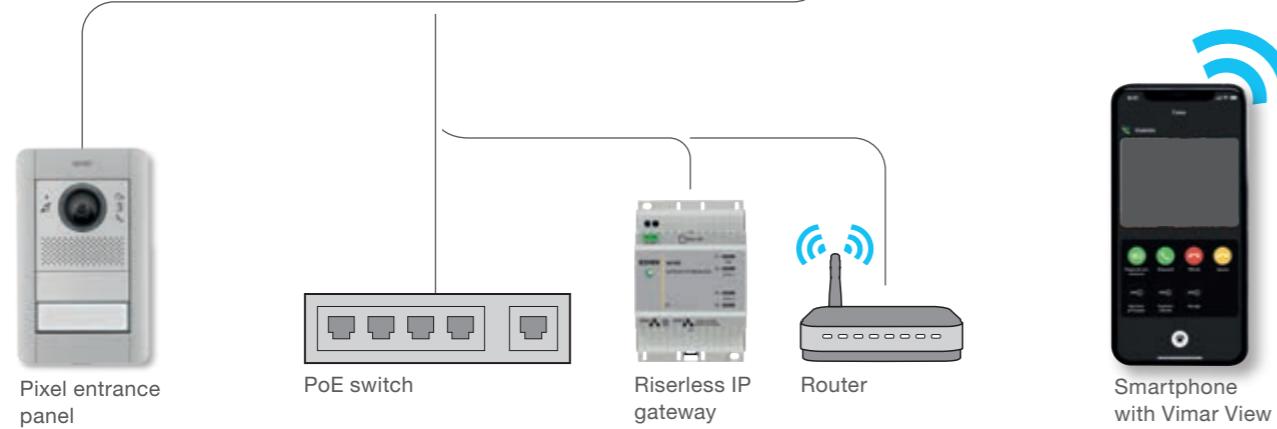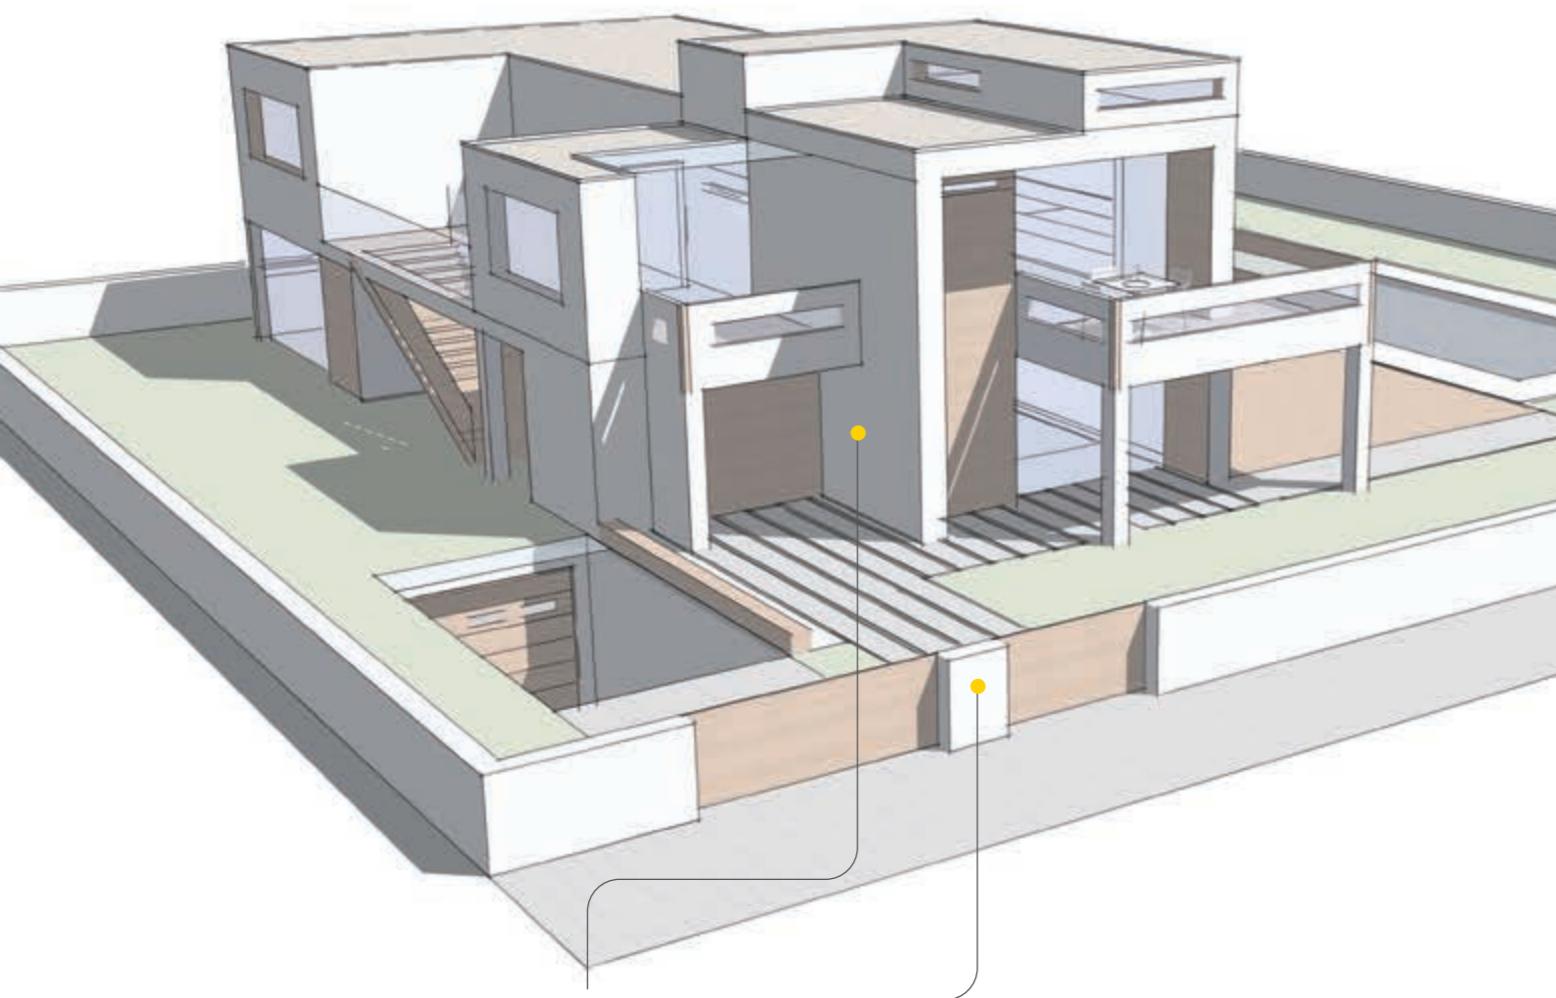


Note: example of standard installation on dedicated video door entry system LAN network. The passive structured cabling and active components may vary depending on the type of network defined for each specific application.

Semi-detached villa with call service via Cloud.

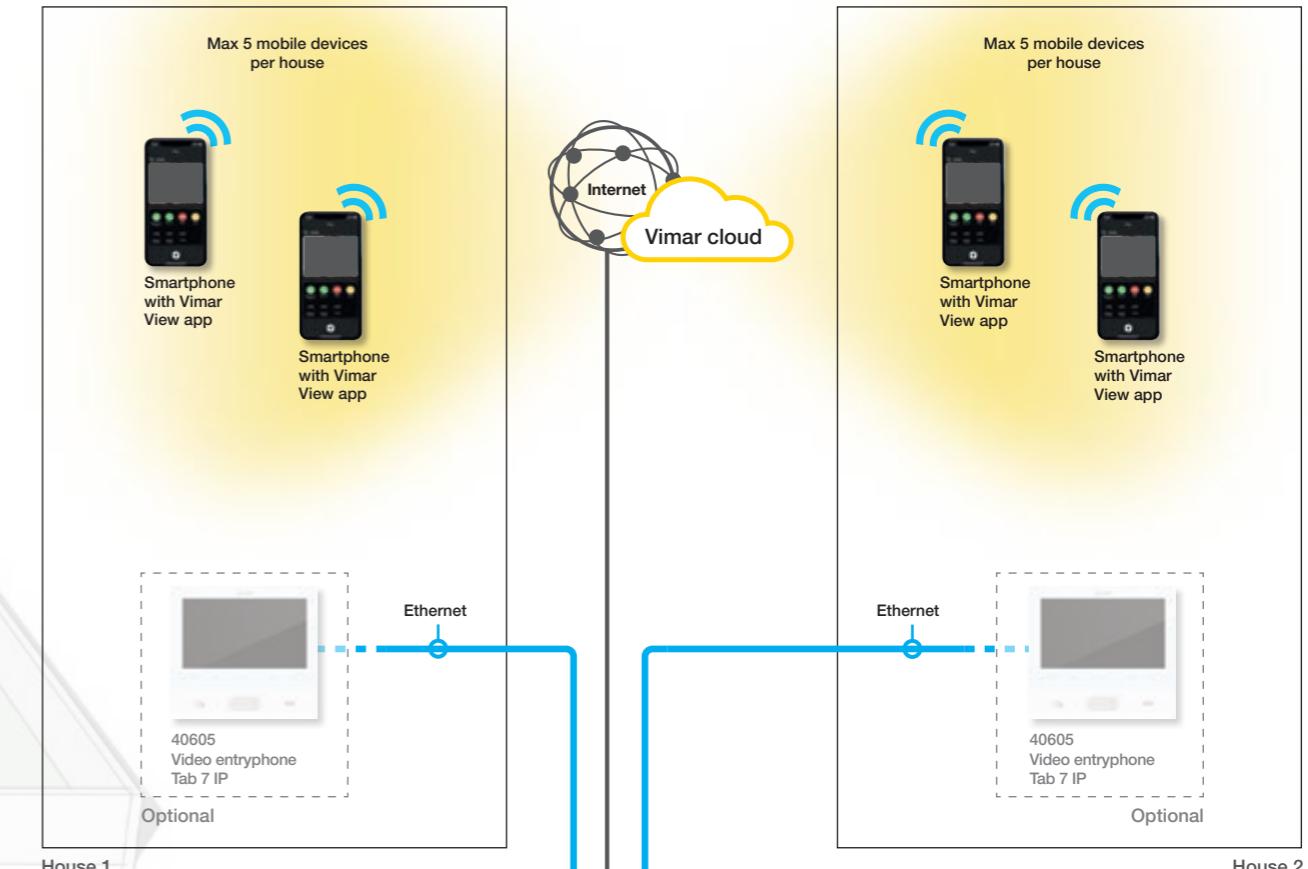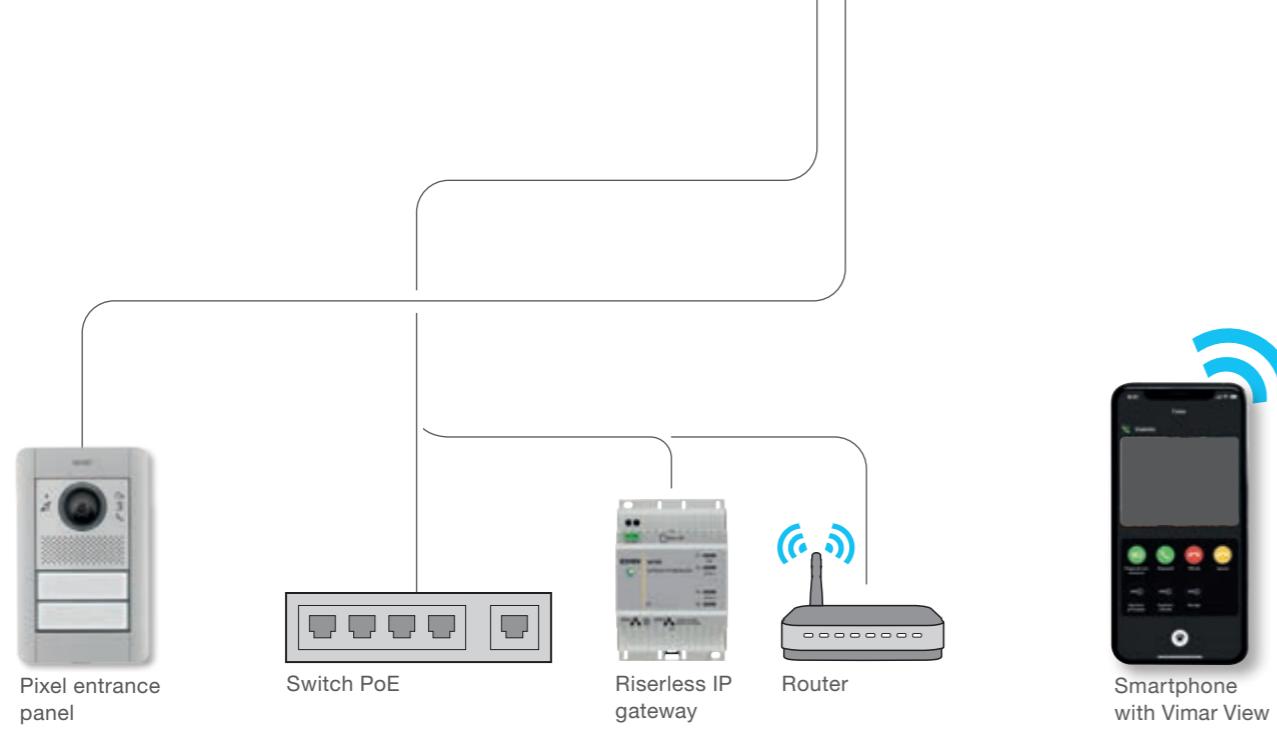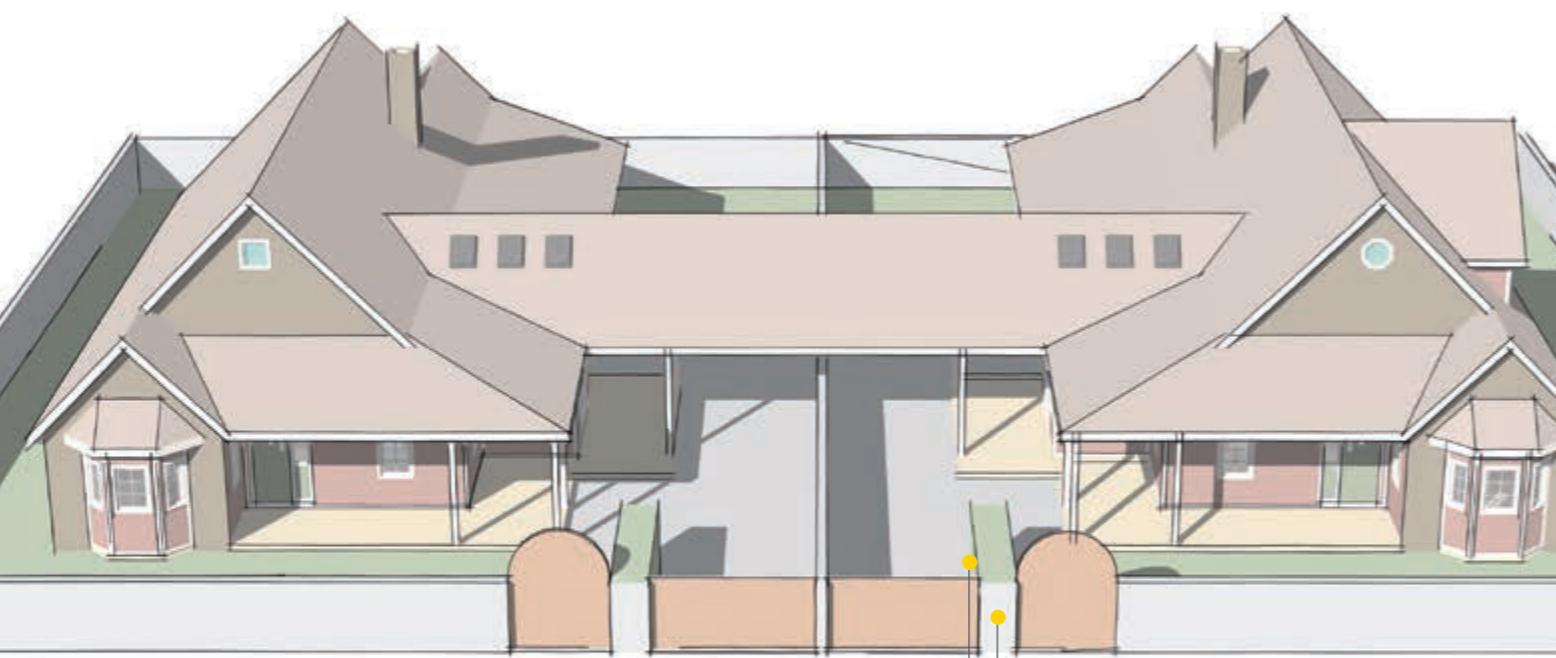

Note: example of standard installation on dedicated video door entry system LAN network. The passive structured cabling and active components may vary depending on the type of network defined for each specific application.

Residential complex with video door entry system with more than 200 devices and call service via Cloud.

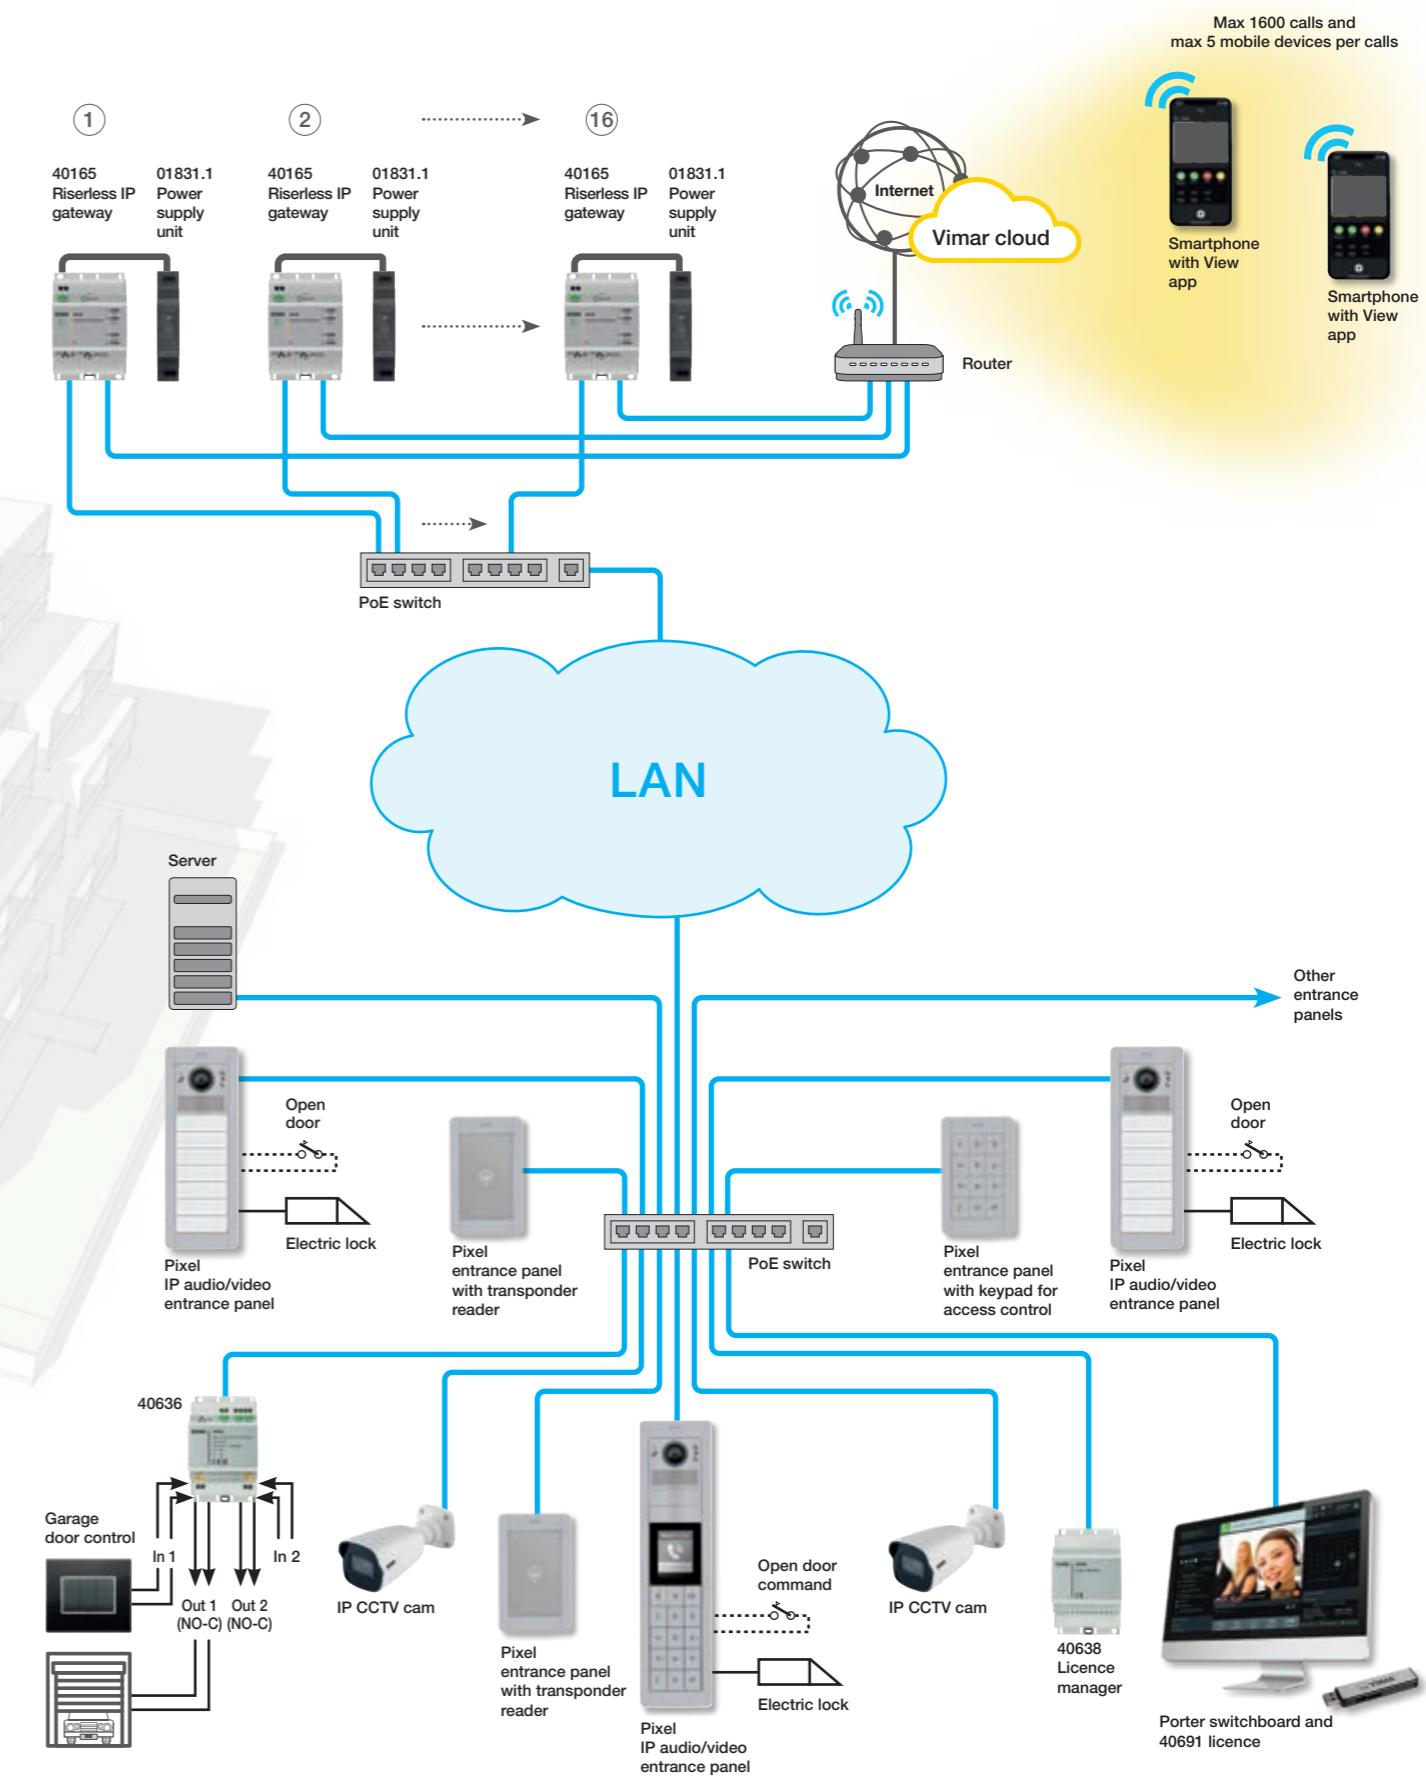

Pixel and Pixel Heavy series

Pixel and Pixel Heavy series entrance panel composition table


Composition		Audio/video				Push buttons		Electronic expansion units					Installation			
1-module entrance panel	Number of calls							Name plates	LCD display	Alphanumeric keyboard	Access control keyboard	Transponder reader	Blank front ⁽⁴⁾	Mounting frame and cover plate	Boxes and accessories	
								41015 Name plates/ address number	41018	41019	41020	41017			Flush mounting	
								41010 10 buttons in a double row							Mounting boxes	Rain-proof frame (optional)
Pixel		Pixel front modules						Pixel front modules					Pixel installation			
Pixel																
Pixel Heavy		Pixel Heavy front modules						Pixel Heavy front modules					Pixel Heavy installation			
Pixel Heavy																
Max 4 ⁽²⁾		1				-										
Max 14 ⁽²⁾		1				Max 1										
Max 24 ⁽²⁾		1				Max 2										

¹ Electronic unit 41000 allows a maximum of 54 calls and cannot be used in conjunction with electronic units 41018 and 41019.² Maximum number of calls that can be made using traditional push buttons. The use of electronic units 41018+41019 allows up to 6400 calls.³ Replace "xx" with 01: grey, 02: slate grey, 03: white and 04: anodised grey.

Replace "yy" with 01: grey, 02: slate grey, 03: white.

⁴ The number of blank modules/blank fronts is complementary to the number of buttons/front modules.

Accessory - Electronic unit wiring




Pixel and Pixel Heavy series.

Pixel and Pixel Heavy series entrance panel composition table

Composition		Audio/video				Push buttons		Electronic expansion units					Installation					
2-module entrance panel	Number of calls							Name plates	LCD display	Alphanumeric keyboard	Access control keyboard	Transponder reader	Blank front ⁽⁴⁾	Mounting frame and cover plate	Boxes and accessories			
								41015 Name plates/ address number	41018	41019	41020	41017			Flush mounting			
Pixel		Pixel front modules						Pixel front modules					Pixel installation					
		 41006.1 With teleloop and wide-angle camera				 41010 10 buttons in a double row		 					 					
Pixel		 41105.yy⁽³⁾				 Buttons and blank module		 Buttons and blank module				 Pixel front modules						
		 Buttons and blank module				 41110 x 1 Single axial		 Buttons and blank module					 Pixel front modules					
		 Buttons and blank module				 41110 x 2 Single axial		 Buttons and blank module					 Pixel front modules					
		 Buttons and blank module				 41112 x 1 Double axial		 Buttons and blank module					 Pixel front modules					
		 Buttons and blank module				 41111 x 2 Single rocker		 Buttons and blank module					 Pixel front modules					
		 Buttons and blank module				 41110 (max 5) Single axial		 Buttons and blank module					 Pixel front modules					
		 Buttons and blank module				 41112 (max 2) Double axial		 Buttons and blank module					 Pixel front modules					
		 Buttons and blank module				 41111 (max 5) Single rocker		 Buttons and blank module					 Pixel front modules					
		 Buttons and blank module				 41114.y⁽³⁾ Double blank module		 Buttons and blank module					 Pixel front modules					
		 Buttons and blank module				 41113.y⁽³⁾ Single blank module		 Buttons and blank module					 Pixel front modules					
Pixel Heavy		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
Pixel Heavy		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					
Pixel Heavy		 Pixel Heavy front modules				 Pixel Heavy front modules		 Pixel Heavy front modules					 Pixel Heavy installation					

Pixel and Pixel Heavy series.

Pixel and Pixel Heavy series entrance panel composition table

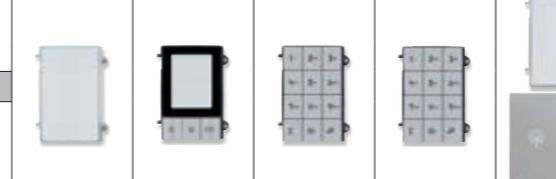Composition		Audio/video				Push buttons		Electronic expansion units					Installation																						
3-module entrance panel	Number of calls							Name plates	LCD display	Alphanumeric keyboard	Access control keyboard	Transponder reader	Blank front ⁽⁴⁾	Mounting frame and cover plate	Boxes and accessories																				
															Flush mounting																				
															Mounting boxes	Rain-proof frame (optional)																			
																																			
		41006.1 With teleloop and wide-angle camera				41010 10 buttons in a double row			41018	41019	41020	41017																							
Pixel		Buttons and blank module				Pixel front modules											Pixel installation																		
																	 3 modules Dim. 110x397x35.8 mm	 3 modules Dim. 110x397x70.6 mm																	
		41105.yy ⁽³⁾															 6 modules (2x3). Dim. 210x397x35.8 mm	 6 modules (2x3). Dim. 210x397x70.6 mm																	
		Buttons and blank module				Buttons and blank module											 Single axial	 Single axial	 Double axial	 Single rocker	 Single axial	 Double axial	 Single rocker							 3 modules Dim. 99.5x391 mm	 3 modules Dim. 98x365x50 mm	 9 modules (3x3). Dim. 310x397x35.8 mm	 9 modules (3x3). Dim. 310x397x70.6 mm		
		41114.yy ⁽³⁾ Double blank module				41113.yy ⁽³⁾⁽⁴⁾ (max 5) Single blank module											 Single blank module	 Double blank module	 Single blank module	 Double blank module							 3 modules Dim. 99.5x391 mm	 3 modules Dim. 98x365x50 mm	 9 modules (3x3). Dim. 310x397x35.8 mm	 9 modules (3x3). Dim. 310x397x70.6 mm					
		0 push b.				5 push b.											1 push b.	2 push b.	1 push b.	4 push b.	5 push b.	2 push b.	10 push b.												
Pixel Heavy		Pixel Heavy front modules				Pixel Heavy front modules											Pixel Heavy installation																		
																	 Blank front	 3 modules Dim. 99.6x393 mm	 3 modules Dim. 82.4x369x50 mm																
		41270				41271											 Blank front	 3 modules Dim. 99.6x393 mm	 3 modules Dim. 82.4x369x50 mm																
		0 push b.				41272											 Blank front	 3 modules Dim. 99.6x393 mm	 3 modules Dim. 82.4x369x50 mm																
		41274				41223											 Blank front	 3 modules Dim. 99.6x393 mm	 3 modules Dim. 82.4x369x50 mm																
		3 push b.				41225											 Blank front	 3 modules Dim. 99.6x393 mm	 3 modules Dim. 82.4x369x50 mm																
		5 push b.				41230											 Blank front	 3 modules Dim. 99.6x393 mm	 3 modules Dim. 82.4x369x50 mm																
		4 push b.				41229											 Blank front	 3 modules Dim. 99.6x393 mm	 3 modules Dim. 82.4x369x50 mm																
		1 push b.				41231											 Blank front	 3 modules Dim. 99.6x393 mm	 3 modules Dim. 82.4x369x50 mm																
		2 push b.				41232											 Blank front	 3 modules Dim. 99.6x393 mm	 3 modules Dim. 82.4x369x50 mm																
		4 push b.				41233											 Blank front	 3 modules Dim. 99.6x393 mm	 3 modules Dim. 82.4x369x50 mm		</td														

Pixel Up series: video entrance panels

Video entrance panels with audio/video electronic unit




ADDITIONAL INSTALLATION ACCESSORIES

To complete the installation of entrance panels with flush or surface mounting boxes and other accessories, see from page 81

Pixel and Pixel Heavy series: video entrance panels

Audio/video and expansion electronic units and accessories

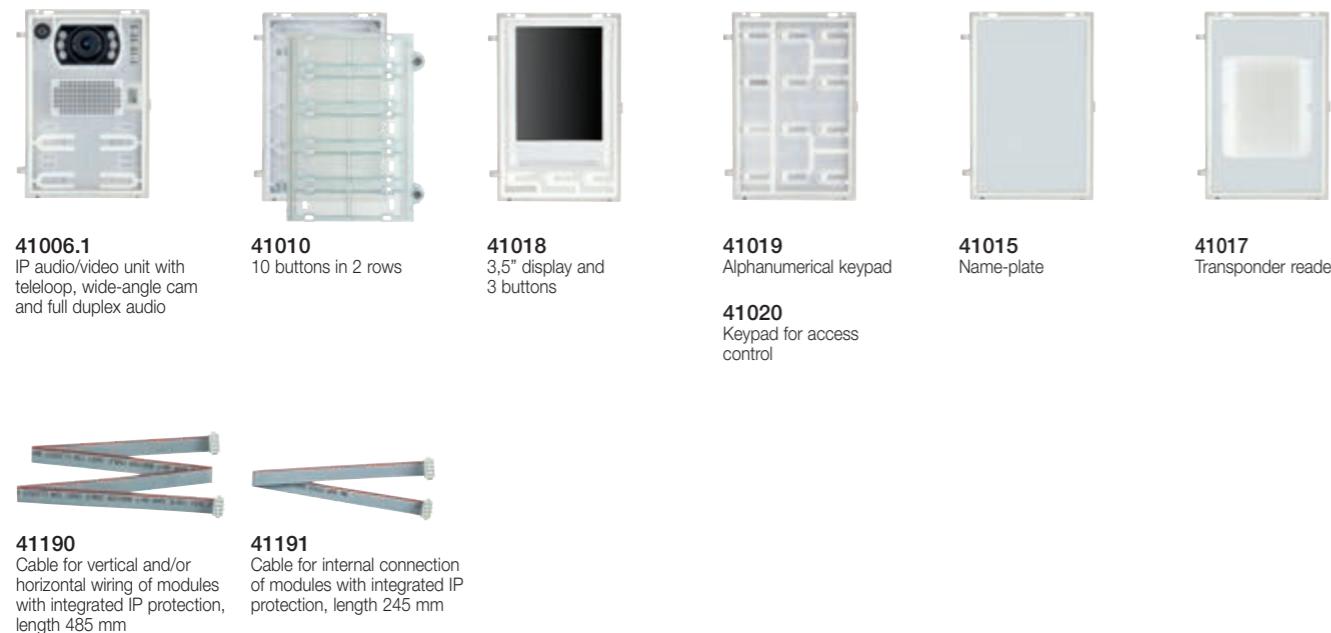

Pixel and Pixel Heavy series: video entrance panels

Pixel - Front modules



ADDITIONAL INSTALLATION ACCESSORIES

To complete the installation of entrance panels with flush or surface mounting boxes, rainproof frames, universal adapters and other accessories, see from page 83

Pixel and Pixel Heavy series: video entrance panels

Pixel Heavy - Front modules (IK09, IK10 and IP54)




ADDITIONAL INSTALLATION ACCESSORIES

To complete the installation of entrance panels with flush or surface mounting boxes, rainproof frames, universal adapters and other accessories, see from page 84

Tab series: video entryphones

Video entryphones and accessories

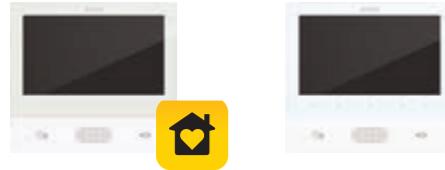

40607
Tab 7S IP, hands-free, integrated Wi-Fi, 7" LCD monitor, teleloop facility for hearing aids, white

40605
Tab 7 IP, hands-free, 7" LCD monitor, teleloop facility for hearing aids, white

40195
Desktop for Tab 7


 App **View** available on Apple and Google Play store

Additional devices

Devices for DIN (60715 TH35) rail installation and software license



40165
Riserless IP gateway



40166
Lift control device, 16 outputs 1A 24 Vdc



40636
2-input/output device, IP standard



40638
Device for the enabling optional services after activation of a license



40691
USB storage device for license activation for 1 IP porter switchboard station



40691.1W
Web license activation for 1 IP porter switchboard station



40692
USB storage device for 1 IP-Riserless license



40692.1W
1 IP-Riserless web license
40692.10W
As above, 10 licenses
40692.50W
As above, 50 licenses
40692.100W
As above, 100 licenses

IP - 1-family video entry system kits



K40607.01
Self-configuring kit, comprises:
- 1 1-module 1-button Pixel series entrance panel, grey (41131.01+41105.01);
- 1 audio/video colour wide-angle electronic unit (41006.1);
- 1 flush mounting box (9191);
- 1 Tab 7S IP hands-free video entryphone white, with integrated Wi-Fi for the remote control of the call on smartphone (40607)


 App **View** available on Apple and Google Play store



SIP (Session Initiation Protocol) is the most commonly used protocol in the VoIP telephony business market.

It is used to create audio or audio-video communication sessions between one or more participants. These sessions include Internet phone calls (VoIP).



Compatibility.

The range is compatible with the products of world leaders in the VoIP telephony sector.

Installation context.

Suited for solutions in any context where there is a SIP server.

Simple configuration.

Commissioning can be done simply from any browser, connecting to the WEB server of the device, without the need for specific software.

Call scenarios.

- Call to a SIP audio device.
- Call to a SIP audio/video device, with or without preview depending on the features.
- Output activation via DTMF.

Software licences.

- They enable calls from the entrance panel to one or more SIP audio devices.
- They enable calls from the entrance panel to one or more SIP audio/video devices.

Elvox IP video door entry system

The system guarantees the functions described using the articles in the catalogue for all the following cases, also in combination:

- installation with less than 200 connected devices, i.e. objects connected to the same LAN network via an RJ45 interface, do not calculate IP CCTV cameras and switch;
- System operating in combination with an SIP server;
- Licences for activating audio or audio/video calls to SIP devices;
- management of access control services with standard articles from the catalogue up to 500 users;

For all other cases and for the integration of third party products/systems, such as VoIP devices with SIP protocol, IP CCTV systems, advanced access control systems, please contact the sales network to consider customized solutions agreed with the system managers. The IP CCTV cameras can not be installed with the entrance panel to operate as call function service.

Switch for the Elvox IP video door entry system

The Elvox IP video door entry system should be completed with switch that manages the traffic of the LAN network. For a correct system operating, it is recommended the use of switch conform to the network characteristics of the current catalogue.


Installation of the passive network

To realize the infrastructure of passive network for the IP video door entry system, it is recommended to install the Vimar Netsafe structured cabling system with a wide range of products able to realize networks in 5e, 6 and 6A categories, shielded or unshielded in copper or fiber optic connections.

A system with great performances, offering versatile solutions for wide-ranging installations and assuring steady connections over time and for every kind of buildings, from the smallest in residential sector to the biggest to the tertiary sector.



For more information browse on the site www.vimar.com.

Network technical data	
Power supply from Ethernet network	PoE, class 0 (IEEE 802.3-2012)
Network interface	RJ45 Ethernet 10/100 Mps (certified)

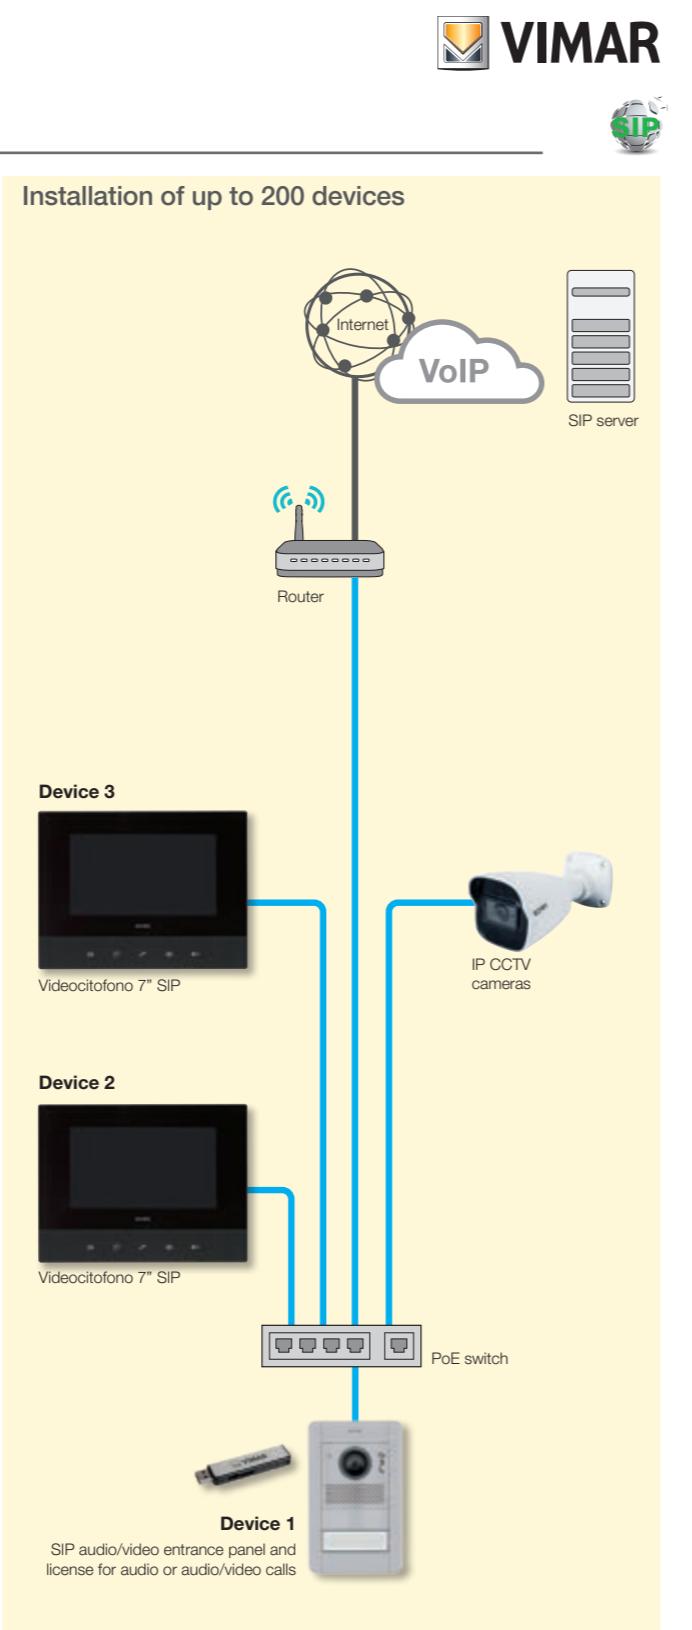**Audio and audio/video systems (SIP).**

Main devices:

- Outdoor stations and licenses for audio or audio/video calls.
- indoor stations.
- PoE switch.
- Router.

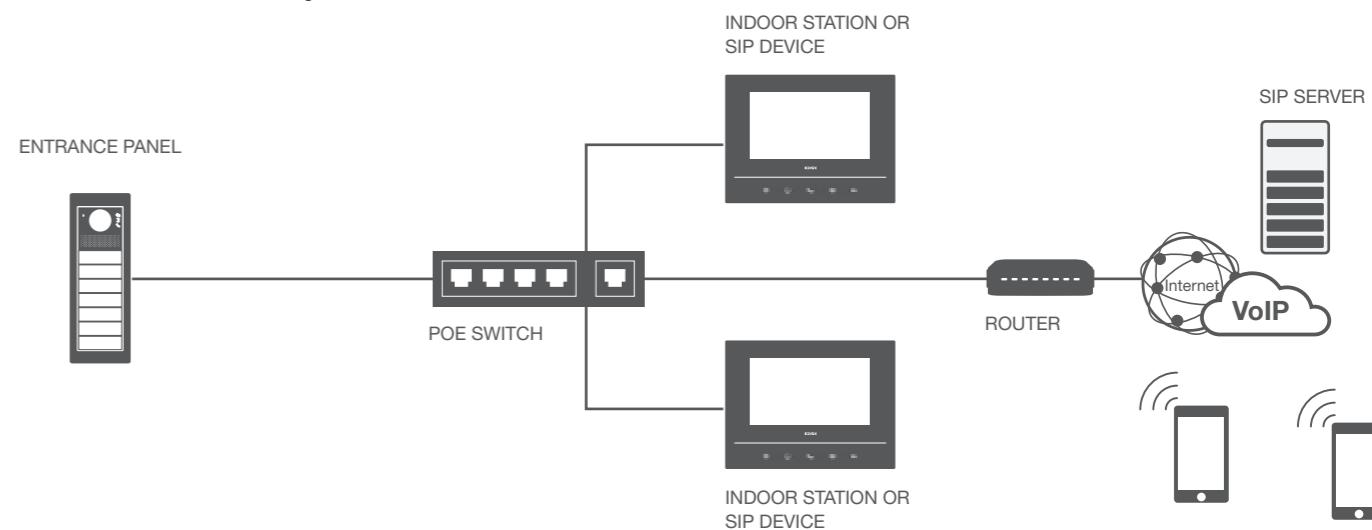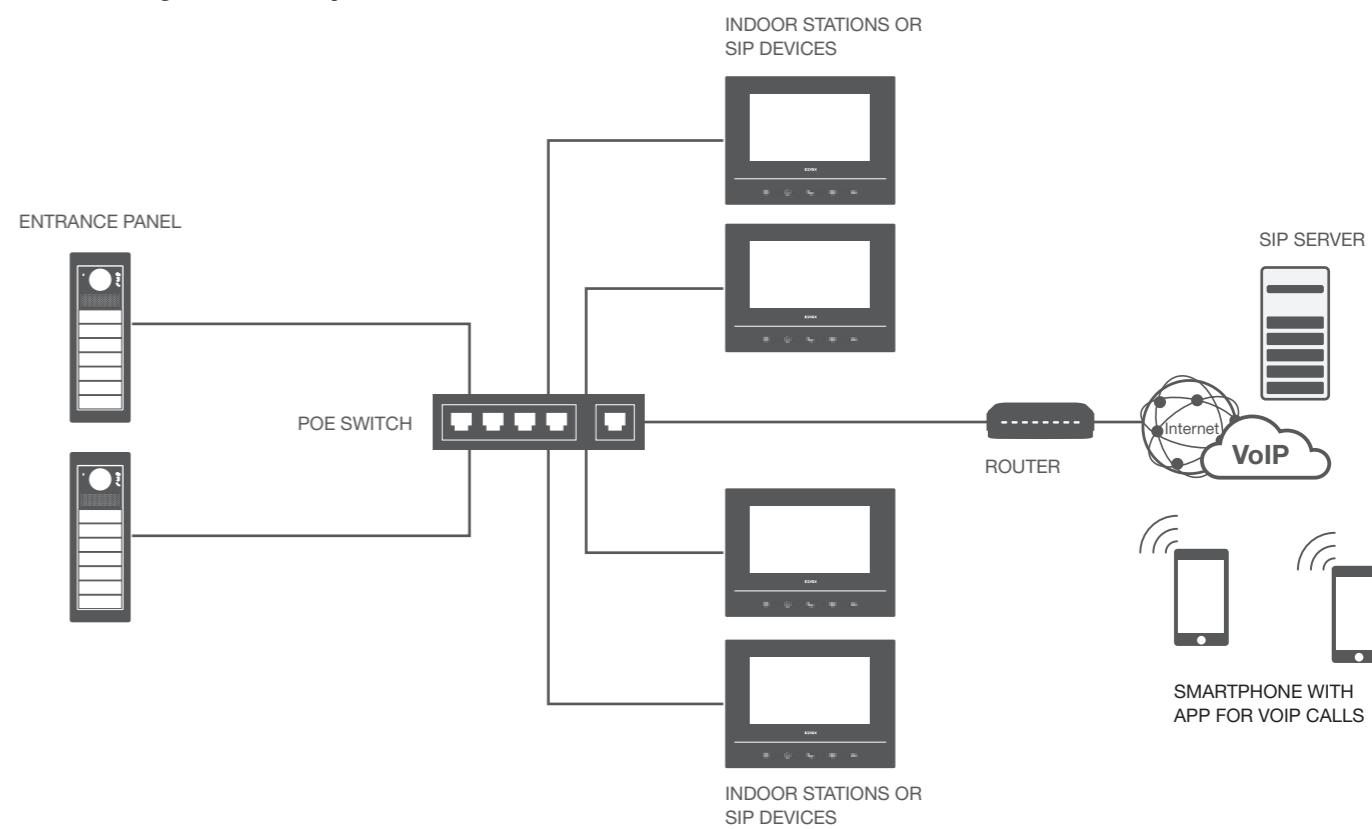With one entrance panel.**With many entrance panels.**

Residential complex with video door entry system with up to 200 devices.




Pixel entrance panel

Pixel entrance panel

Video entryphone 7" SIP

Smartphone with App for VoIP calls

Note: example of standard installation on dedicated video door entry system LAN network. The passive structured cabling and active components may vary depending on the type of network defined for each specific application.

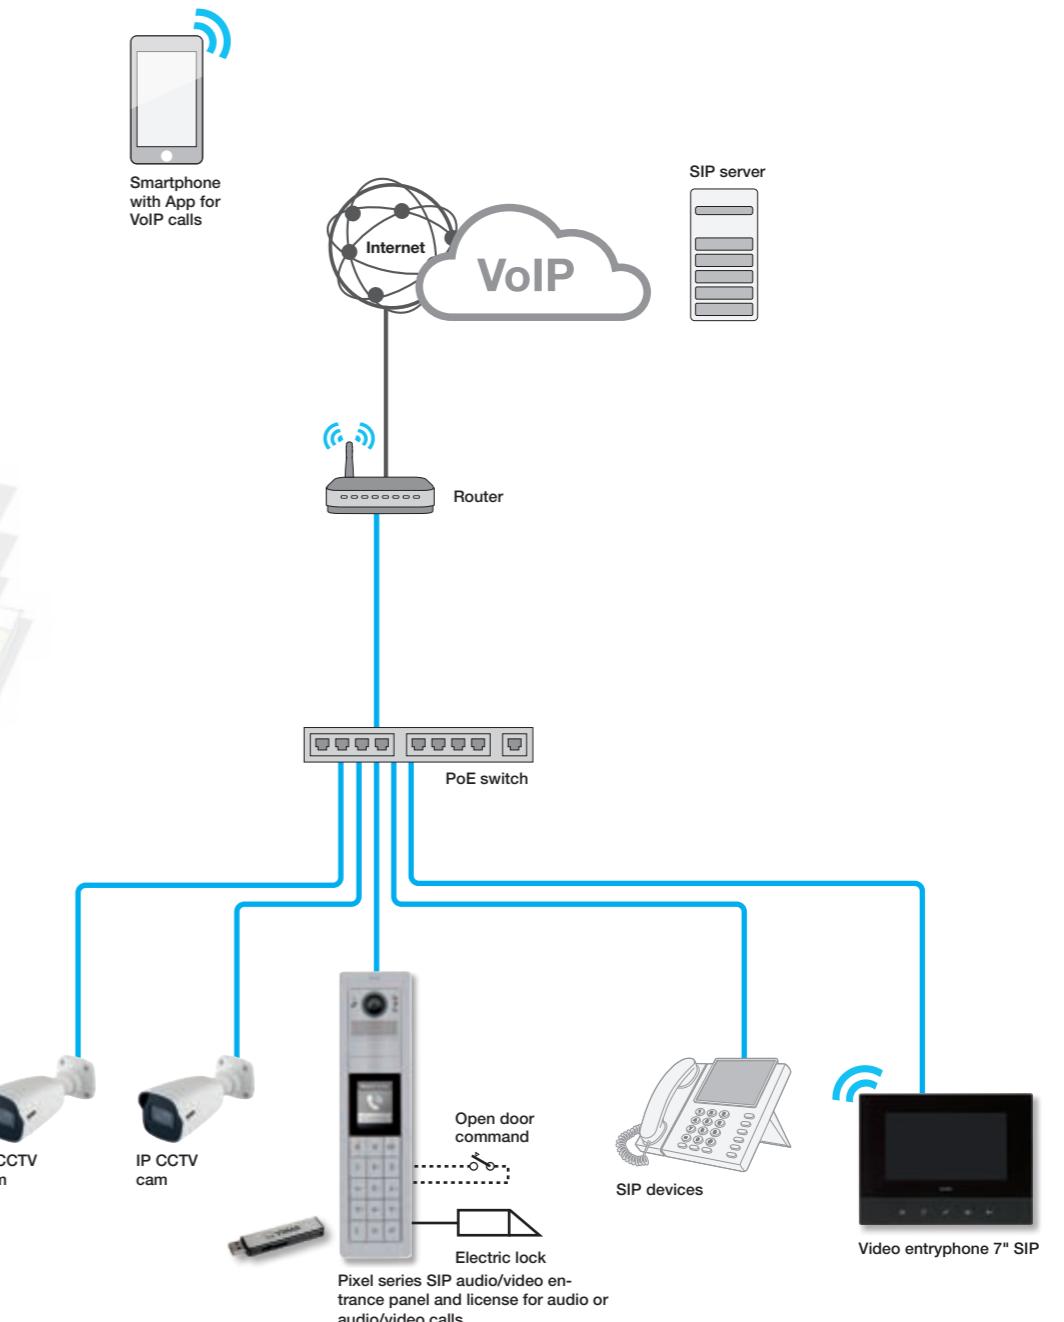

Pixel Up series: video entrance panels

Video entrance panels with audio/video electronic unit



40414.S
Audio/video
with 4x4 reader
hole,
stainless steel



40415.S
Audio/Video,
stainless steel

ADDITIONAL INSTALLATION ACCESSORIES

To complete the installation of entrance panels with flush or surface mounting boxes and other accessories, see from page 81



Pixel and Pixel Heavy series: video entrance panels

Audio/video and expansion electronic units and accessories



41007
SIP audio/video unit with
teleloop, wide-angle cam
and full duplex audio



41010
10 buttons in 2 rows



41018
3.5" display and
3 buttons



41019
Alphanumerical keypad



41015
Name-plate



41190
Cable for vertical and/or
horizontal wiring of modules
with integrated IP protection,
length 485 mm



41191
Cable for internal connection
of modules with integrated IP
protection, length 245 mm

Pixel - Front modules



41105.01
Audio/Video teleloop
for 41007 unit, grey
41105.02
As above, slate grey
41105.03
As above, white



41118.01
Display for 41018 unit,
grey
41118.02
As above, slate grey
41118.03
As above, white



41119.01
Keypad for 41019 and
41020 units, grey
41119.02
As above, slate grey
41119.03
As above, white



41121.01
Blank module,
grey
41121.02
As above, slate grey
41121.03
As above, white



41115
Name-plate
for 41015 unit



41110
Single axial button



41111
Single rocker button



41112
Double axial button



41113.01
Single blank button,
grey
41113.02
As above, slate grey
41113.03
As above, white



41114.01
Double blank button,
grey
41114.02
As above, slate grey
41114.03
As above, white


ADDITIONAL INSTALLATION ACCESSORIES

To complete the installation of entrance panels with flush or surface mounting boxes, rainproof frames, universal adapters and other accessories, see from page 83



Pixel and Pixel Heavy series: video entrance panels

Pixel Heavy - Front modules (IK09, IK10 and IP54)

**41270**
Audio/video for 41006.1 unit, no buttons, with teleloop**41271**
Audio/Video for 41006.1 unit, 1-button, with teleloop, IK10 and IP54 protection**41272**
Audio/Video for 41006.1 unit, 1-button, with teleloop, IK10 and IP54 protection**41274**
Audio/Video for 41006.1 unit, 2-button, with teleloop, IK10 and IP54 protection**41223**
For 41010 unit, 3-button**41225**
For 41010 unit, 5-button**41230**
For 41010 unit, 10-button in 2 rows**41218**
Display for 41018 unit, IK09**41219**
Keypad for 41019 and 41020 unit, IK09**41215**
Keypad for 41019 and 41020 unit, IK09**41221**
Name-plate for 41015 unit**41222**
Blank module

ADDITIONAL INSTALLATION ACCESSORIES

To complete the installation of entrance panels with flush or surface mounting boxes, rainproof frames, universal adapters and other accessories, see from page 84

Video entrance panels with audio/video electronic unit

**K41007.01**
Pixel audio/video entrance panel, with 1-button, flush mounting box and audio/video unit 41007**K41007.03**
Pixel Heavy audio/video entrance panel, with 1-button, flush mounting box and audio/video unit 41007**K41007.02**
As above, with 2-button**K41007.04**
As above, with 2-button

Video entryphones

Video entryphones and accessories

**40610.S**
Hands-free video entryphone, integrated Wi-Fi, 7" LCD touch screen monitor, PoE power supply, surface mounting, black**40597**
Table box for 7" SIP video entryphone

Software licenses

Software licenses for compatible SIP devices

**40690**
USB storage device for licence activation codes for 1 SIP audio/video call**40690.A**
USB storage device for licence activation codes for 1 SIP audio call**40690.1W**
Web licence activation codes for 1 SIP audio call**40690.10W**
Web licence activation codes for 10 SIP audio calls**40690.A10**
As above, 10 SIP audio/video calls**40690.A50**
As above, 50 SIP audio calls**40690.A100**
As above, 100 SIP audio calls**40690.100W**
As above, 100 SIP audio/video calls**40690.A200**
As above, 200 SIP audio calls**40690.200W**
As above, 200 SIP audio/video calls


Analogue technology with Sound System call system.

The Sound System call system uses different ringtones to instantly identify where the call received from the entryphone is coming from. When the signal arrives, the entryphone emits a different sound depending on where the call is coming from (entrance panel, landing, intercom). This allows you to know where the caller is even before you answer.


Up to 200 metres.

With analogue technology, 200 metres is the maximum distance between the various devices (entrance panels, entryphones and power supply units), without adding amplifiers.

Analogue technology with A.C. call system.

In the A.C. call system, calls to door entry systems are carried via a very low voltage alternate current signal. The kettledrum or buzzer ringtones in the door entry system are powered and triggered by the call signal itself.

Electronic units for 1300, 1200, reinforced 1200, 8000 and 8100 series

Audio electronic units

**0930/000.04**
Audio with 4+n wires connection. For Sound System and a.c. call**930C**
Audio with dual amplifier and 4+n wires connection. For a.c. call**930G**
Audio with dual amplifier and 4+n wires connection. For Sound System and a.c. call**930A**
As above, with the mobile microphone**930D**
Audio with dual amplifier and 1+n wires connection. For Sound System call**930B**
Audio with two-wire connection

1300 series: entrance panels

Audio reduced module entrance panels

**13K1**
1-button, entrance plate for surface and flush mounting, electropolished anodized aluminium

2- and 3-module entrance plates

**1321**
1-button and 3 blank covers, electropolished anodized aluminium**1331**
1-button and 7 blank covers, electropolished anodized aluminium

Accessories

**R130**
Blank module for 1300 entrance plate**R200**
Single button for entrance panels**0002/994**
Strip with 4 diodes for 1+n wires connection**R260**
Green LED module for name card

R260.B
As above, with white LED**R131**
Button for 1300 entrance plate

ADDITIONAL INSTALLATION ACCESSORIES

To complete the installation of entrance panels with flush or surface mounting boxes, rainproof frames, universal adapters and other accessories, see from page 87



1200 series: entrance panels

2-module audio

**1220**
No buttons, stainless steel**1221**
1-button, stainless steel**1222**
2-button, stainless steel**1223**
3-button, stainless steel**1224**
4-button, stainless steel

Reinforced 1200 series: audio entrance panels

2-module audio and additional entrance plates

**1220/35**
No buttons, IK10 protection, sable grey**1221/35**
1-button, IK10 protection, sable grey**1222/35**
2-button, IK10 protection, sable grey**1223/35**
3-button, IK10 protection, sable grey**1224/35**
4-button, IK10 protection, sable grey**1258/35**
Additional, 8-button, IK10 protection, sable grey**122D/35**
Alphanumeric keypad, IK10 protection, sable grey**122N/35**
Additional, name-plate, IK10 protection, sable grey

Accessories for 1200 and reinforced 1200 series

**R200**
Single button for entrance panels**0002/994**
Strip with 4 diodes for 1+n wires connection**R260**
Green LED module for name card**R200/50**
As above, in pack of 50 pieces**R260.B**
As above, with white LED

To complete the installation of entrance panels with flush or surface mounting boxes, rainproof frames, universal adapters and other accessories, see from page 88

8000 series: audio entrance panels

Standard modules for audio entrance panels

8010
Standard audio module, light grey8011
1-button standard audio module, light grey8012
2-button standard audio module, light grey8001
1-button, light grey8002
2-button, light grey8003
3-button, light grey8004
4-button, light grey8006
6-button, light grey8008
8-button, light grey800N
House number, light grey8000
Blank module, light grey8016
Keypad module for opening an encoded lock, light grey

Frames

8081
For 1 module, RAL 7035 grey8082
For 2 modules and for additional modules only, RAL 7035 grey8083
For 3 modules and for additional modules only, RAL 7035 grey

Rainproof covers

9211
1 module, light grey9212
2 modules, light grey9213
3 modules, light grey9221
2x1 modules, light grey9222
2x2 modules, light grey9223
2x3 modules, light grey9231
3x1 modules, light grey9232
3x2 modules, light grey9233
3x3 modules, light grey9242
4x2 modules, light grey9243
4x3 modules, light grey9191
1 module9192
2 modules9193
3 modules88T1
Audio with 1 button, for surface mounting, light grey88T2
As above, with 2 buttons8911
Audio with 1 button, for flush mounting, light grey891D
Audio with 2 buttons, for flush mounting, light grey921K
Rainproof cover for 891D, light grey931K
Surface mounting box for 891D, light grey8100
Without buttons, aluminium8101
With 1 button, aluminium8102
With 2 buttons, aluminium8103
With 3 buttons, aluminium8104
With 4 buttons, aluminium8154
Additional panel with 4 buttons, aluminium8155
Additional panel with 5 buttons, aluminium8156
Additional panel with 6 buttons, aluminium8157
Additional panel with 7 buttons, aluminium8101/19
As above, light grey8102/19
As above, light grey8103
With 4 buttons, aluminium8104
With 5 buttons, aluminium8154
Additional panel with 4 buttons, aluminium8155
Additional panel with 5 buttons, aluminium8156
Additional panel with 6 buttons, aluminium8157
Additional panel with 7 buttons, aluminium

8100 series: audio entrance panels

Audio entrance panels and additional panels for surface mounting



8000 and 8100 series: audio entrance panels

Accessories for 8000 and 8100 series

0002/994
Strip with 4 diodes for 1+1 wires connection

8000 series: audio entrance panels

Surface mounting boxes

9311
1 module, light grey9312
2 modules, light grey9313
3 modules, light grey9321
2x1 modules, light grey9322
2x2 modules, light grey9323
2x3 modules, light grey9331
3x1 modules, light grey9332
3x2 modules, light grey9333
3x3 modules, light grey9342
4x2 modules, light grey9343
4x3 modules, light grey

Audio entrance panels and boxes

88T1
Audio with 1 button, for surface mounting, light grey88T2
As above, with 2 buttons8911
Audio with 1 button, for flush mounting, light grey891D
Audio with 2 buttons, for flush mounting, light grey921K
Rainproof cover for 891D, light grey931K
Surface mounting box for 891D, light grey

1720 series: call button

Call button

1721
With 24 V 3 W lamp, for flush mounting

Sound System - Audio entry system kit



884G
1-family kit comprises:
- 1 1-button surface mounting 8000 series entrance panel (88T1);
- 1 electronic unit (930B);
- 1 surface mounting entryphone, white (8874);
- 1 supply unit (M832)



884G/S
1-family kit comprises:
- 1 1-button flush mounting 8000 series entrance panel (8911);
- 1 electronic unit (930B);
- 1 surface mounting entryphone, white (8874);
- 1 supply unit (M832)



88AG
1-family kit comprises:
- 1 1-button flush mounting 8000 series entrance panel (8911);
- 1 electronic unit (930A);
- 1 surface mounting entryphone, white (8875);
- 1 supply unit (0931)

884G/120
As above, with M832.120
120 V~ 50/60 Hz



K62K0.01
1-family kit comprises:
- 1 1-button surface mounting 8000 series entrance panel (8101/19);
- 1 electronic unit (930G);
- 1 surface mounting Petrarca series entryphone, white (62K0);
- 1 supply unit (40102)



K62K0.02
2-family kit comprises:
- 1 2-button surface mounting 8000 series entrance panel (8102/19);
- 1 electronic unit (930G);
- 2 surface mounting Petrarca series entryphones, white (62K0);
- 1 supply unit (40102)



K62K0.03
3-family kit comprises:
- 1 3-button surface mounting 8000 series entrance panel (8103/19);
- 1 electronic unit (930G);
- 3 surface mounting Petrarca series entryphones, white (62K0);
- 1 supply unit (40102)



K62K0.04
4-family kit comprises:
- 1 4-button surface mounting 8000 series entrance panel (8104/19);
- 1 electronic unit (930G);
- 4 surface mounting Petrarca series entryphones, white (62K0);
- 1 supply unit (40102)



K62K0.06
6-family kit comprises:
- 1 6-button surface mounting 8000 series entrance panel (8116/19);
- 1 electronic unit (930G);
- 6 surface mounting Petrarca series entryphones, white (62K0);
- 1 supply unit (40102)



K62K0.08
8-family kit comprises:
- 1 8-button surface mounting 8000 series entrance panel (8118/19);
- 1 electronic unit (930G);
- 8 surface mounting Petrarca series entryphones, white (62K0);
- 1 supply unit (40102)



K62K0.10
10-family kit comprises:
- 1 10-button surface mounting 8000 series entrance panel (8114/19+8166/19);
- 1 electronic unit (930G);
- 10 surface mounting Petrarca series entryphones, white (62K0);
- 1 supply unit (40102)



Sound System - Audio entry system kit



K62K0.12
12-family kit comprises:
- 1 12-button surface mounting 8000 series entrance panel (8116/19+8166/19);
- 1 electronic unit (930G);
- 12 surface mounting Petrarca series entryphones, white (62K0);
- 1 supply unit (40102)



K62K0.14
14-family kit comprises:
- 1 14-button surface mounting 8000 series entrance panel (8116/19+8168/19);
- 1 electronic unit (930G);
- 14 surface mounting Petrarca series entryphones, white (62K0);
- 1 supply unit (40102)



K62K0.16
16-family kit comprises:
- 1 16-button surface mounting 8000 series entrance panel (8118/19+8168/19);
- 1 electronic unit (930G);
- 16 surface mounting Petrarca series entryphones, white (62K0);
- 1 supply unit (40102)

CA 4+n conductors - Pre-programmed audio entry system kit



885E
2-family kit comprises:
- 1 2-button surface mounting 8000 series entrance panel (88T2);
- 1 electronic unit (930C);
- 2 surface mounting entryphones, white (8870);
- 1 supply unit (M832)



885E/S
2-family kit comprises:
- 1 2-button flush mounting 8000 series entrance panel (8812);
- 1 electronic unit (930C);
- 2 surface mounting entryphones, white (8870);
- 1 supply unit (M832)



885G
1-family kit comprises:
- 1 1-button surface mounting 8000 series entrance panel (88TS);
- 1 electronic unit (930C);
- 1 surface mounting entryphone, white (8870);
- 1 supply unit (M832)




885G/240
As above,
240 V~ 50/60 Hz





One-family and two-family expandable **video door entry kits**.

Kits with touch screen monitor and Wi-Fi connection.

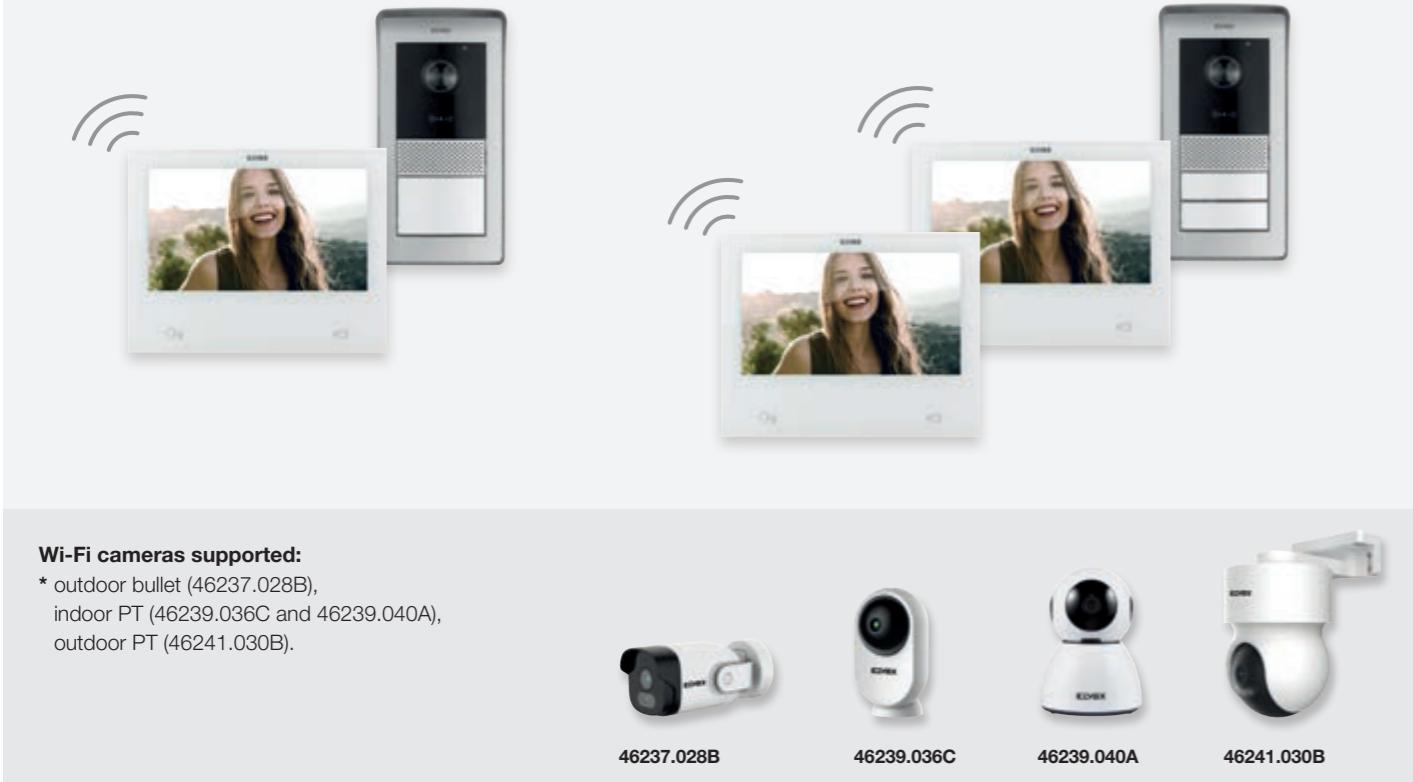

IP over 2 wires. High performance and simple wiring.

The performance of IP technology comes together with the simplicity of 2-wire wiring. High-performance and easy to install, with just 2 wires, the video door entry kits allow you to check who is ringing at your door, even when you're out. Thanks to the monitor with integrated Wi-Fi and to the View Door App, you can receive and manage video door entry calls directly from your smartphone or tablet. Our video door entry kits all boast Full-HD video quality (2 Mpx resolution), a wide recording angle and allow up to 3 calls to be made simultaneously, connect sensors and select the related scenarios, as well as use transponder cards. The one- or two-family kits are expandable, to create systems for up to four families, with 4 indoor stations per apartment, 4 outdoor stations, 8 cameras per apartment and 20 shared cameras, visible from all the apartments in the system.

Ready to use

No need for programming, simply connect the devices with just 2 wires.

Connection with just 2 wires

Just 2 wires are required to connect the outdoor station, the power supply unit and the indoor station.

Expandable

The system can be expanded by connecting up to 4 indoor stations for each home and 4 outdoor stations.

Intercom

Calls and conversations between indoor stations installed within the same system are possible, even between different homes.

Call repetition

Scenarios

Indoor stations with additional output for call repetition.

Multiple communications

4 scenarios available (at home, away, night, customised), with alert notification sending to be combined with the 8 indoor station inputs for sensors.

Access control

Access control via RFID card reader in the outdoor station (up to 10 different transponder keys).


Wi-Fi camera connection*

Up to 8 cameras per home and up to 20 shared cameras, visible from all the homes in the system.

2-wire system retrofits

When refurbishing existing 2-wire systems, the indoor and outdoor stations can simply be replaced, maintaining the same wiring.

Compact and solid panels, expandable up to 4 calls.

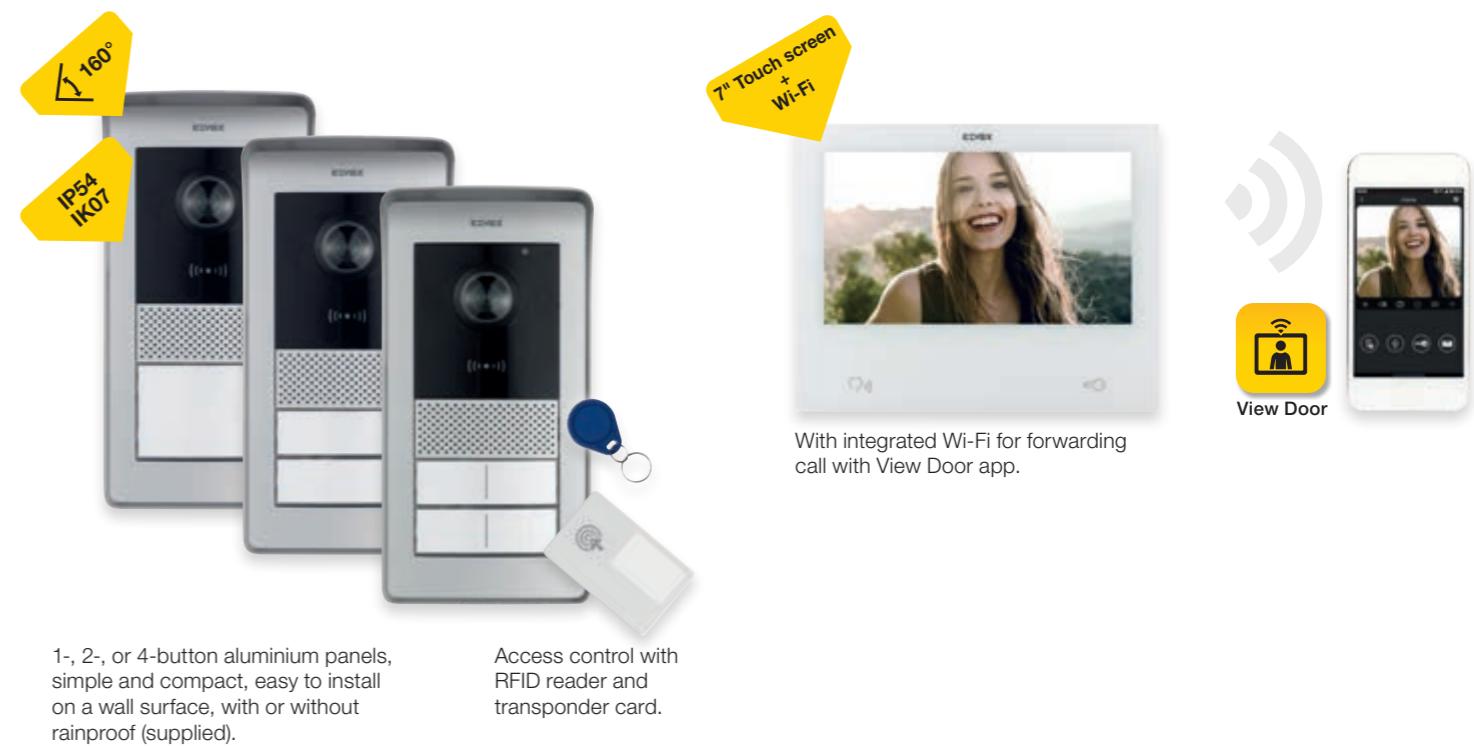

Monitor with integrated Wi-Fi.

Other kits - IP over 2 wires kits

IP over 2 wires - Stand alone video entry kit


K40980

Kit comprises:

- 1 audio/video entrance panel with rain-proof frame configurable for 1, 2 or 4 families with RFID reader (40980.P);
- 1 hands-free touch screen monitor, integrated Wi-Fi, 7" LCD colour display (40980.M);
- 5 Mifare coloured RFID cards (40169);
- 1 power supply unit (40105).

Complete with brackets for surface mounting


K40981

Kit comprises:

- 1 audio/video entrance panel with rain-proof frame configurable for 1, 2 or 4 families with RFID reader (40980.P);
- 2 hands-free touch screen monitors, integrated Wi-Fi, 7" LCD colour display (40980.M);
- 5 Mifare coloured RFID cards (40169);
- 1 power supply unit (40105).

Complete with brackets for surface mounting

Other kits - IP over 2 wires kits

IP over 2 wires - Stand alone video entry kit

Accessories


40980.M

Additional hands-free touch screen monitor, integrated Wi-Fi, 7" LCD colour display


40980.P

Additional audio/video entrance panel with rain-proof frame configurable for 1, 2 or 4 families with RFID reader


▲ 42920.F

Kit with frame, mounting frame, flush mounting box for flush mounting entrance panel 40980.P and 42920.P


42920.K

1-2-4 button kit for RFID Video kit entrance panel (40980.P and 42920.P)


40169

7 Mifare coloured RFID cards


01598

Programmable transponder card


01817
Mifare transponder card

40105
Supply unit 32 Vdc 4 A, 100-240 V~ 50/60 Hz


View Door app available for iOS and Android operating systems, downloadable from Apple and Google Play stores.



One-family and two-family expandable **video door entry kits**.

- Kits with touch screen monitor.
- Kits with touch screen monitor and Wi-Fi connection.



- Kits with monitor with capacitive keypad.

Video door entry kits. Expandable up to 4 housing units.

Video door entry kits for every living context even with wireless connection for remote call forwarding to mobile devices. Vimar offers a wide range of ready-to-use video door entry kits, 1 or 2-family expandable up to 4-family, with touch screen monitors or monitors with capacitive keypad. Kits with Wi-Fi connection are now available, to manage the videocall from smartphone or tablet by the View Door app.

Ready to use

It is not necessary the programmation because you have only to connect the entrance panel and the monitor with just 2 wires and the all it's done!

Quick connections

Only 2 wires are required to connect the external panel and monitors up to a maximum distance of 100 m.

Expandable

The system can be expanded connecting up to 3 monitors per each housing unit and 2 external entrance panels (max. 4 housing units).

Intercom

From any monitor it is possible to call and communicate with other monitors connected to the system in the same housing unit.

Connectable outdoor camera

An additional external CCTV camera can be connected to the entrance panel to extend the monitored area.

Metal entrance panel

The kits are supplied with aluminium entrance panels for surface-mounting installation with or without rainproof trim and 130° wide-angle camera.

Universal power supply

All kits are available with a multi-plug power supply (AU/EU/UK/US standard) or a power supply for DIN rail.

One-family and two-family video door entry kits with 3 monitor models:

- 7" LCD TFT colour monitor with capacitive keypad;

- 7" LCD TFT colour touch screen monitor. It is possible to install a micro SD memory from 8 to 32 GB in the monitor, to record images and messages from audio/video entrance panel;

- 7" LCD TFT colour touch screen monitor **and Wi-Fi connection for forwarding call to smartphone or tablet with View Door app.**

It is possible to install a micro SD memory from 8 to 32 GB in the monitor, to record images and messages from audio/video entrance panel.


Compact and solid panels, expandable up to 4 calls.



1-, 2-, or 4-button aluminium panels, simple and compact, easy to install on a wall surface, with or without rainproof (supplied).

Access control with RFID reader.

High-definition monitor also with integrated Wi-Fi.

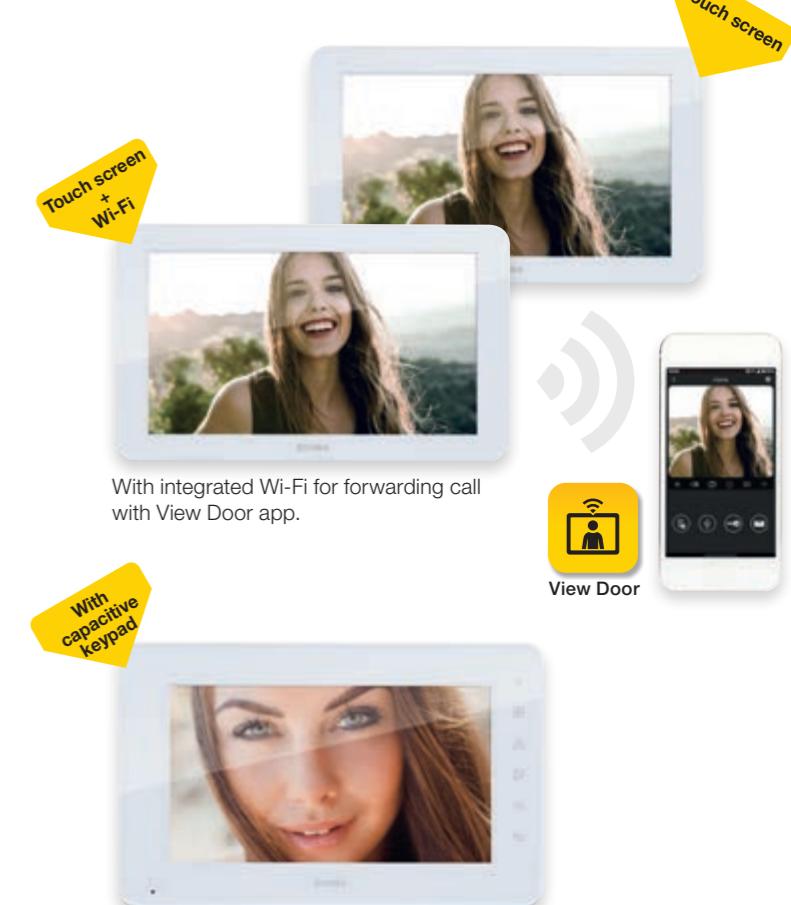

Other kits - Stand alone video entry kits

Stand alone video entry kit



K42945

Kit comprises:
 - 1 metal surface mounting entrance plate with rainproof cover and 1 button, grey;
 - 1 7" LCD touch screen video door entry with Wi-Fi connection, hands-free, with brackets for surface mounting, white;
 - 1 24 Vdc 1 A multi-plugs power supply for EU, UK, USA and AU standards.
 Complete with brackets for surface mounting

K42955

As above, with 1 DIN (60715 TH35) rail power supply 40103



K42915

Kit comprises:
 - 1 metal surface mounting entrance plate with rainproof cover and 1 button, grey;
 - 1 surface mounting hands-free video door entry with 7" touch screen LCD display, white;
 - 1 EU, BS, UK and AU multi-plugs power supply.
 Complete with brackets for surface mounting

K42935

As above, with 1 DIN (60715 TH35) rail power supply 40103



K42910

Kit comprises:
 - 1 metal surface mounting entrance plate with rainproof cover and 1 button, grey;
 - 1 surface mounting hands-free video door entry with 7" LCD display with capacitive keypad, white;
 - 1 EU, BS, UK and AU multi-plugs power supply.
 Complete with brackets for surface mounting

K42930

As above, with 1 DIN (60715 TH35) rail power supply 40103



K42946

Kit comprises:
 - 1 metal surface mounting entrance plate with rainproof cover and 2 buttons, grey;
 - 2 7" LCD touch screen video door entries with Wi-Fi connection, hands-free, with brackets for surface mounting, white;
 - 2 24 Vdc 1 A multi-plugs power supply for EU, UK, USA and AU standards;
 - 1 bus distributor with 4 outputs.
 Complete with brackets for surface mounting

K42956

As above, with 2 DIN (60715 TH35) rail power supplies 40103



K42916

Kit comprises:
 - 1 metal surface mounting entrance plate with rainproof cover and 2 buttons, grey;
 - 2 surface mounting hands-free video door entries with 7" touch screen LCD display, white;
 - 2 EU, BS, UK and AU multi-plugs power supplies;
 - 1 bus distributor with 4 outputs.
 Complete with brackets for surface mounting

K42936

As above, with 2 DIN (60715 TH35) rail power supplies 40103



K42911

Kit comprises:
 - 1 metal surface mounting entrance plate with rainproof cover and 2 buttons, grey;
 - 2 surface mounting hands-free video door entries with 7" LCD display with capacitive keypad, white;
 - 2 EU, BS, UK and AU multi-plugs power supplies;
 - 1 bus distributor with 4 outputs.
 Complete with brackets for surface mounting

K42931

As above, with 2 DIN (60715 TH35) rail power supplies 40103

Other kits - Stand alone video entry kits

Stand alone video entry kit

Accessories



K42947

Additional hands-free touch screen monitor, integrated Wi-Fi, 7" LCD colour display with 24 Vdc 1 A multi-plugs power supply for EU, UK, USA and AU standards

K42957

As above, with 1 DIN (60715 TH35) rail power supply 40103



K42917

Additional hands-free touch screen monitor, 7" LCD colour display with EU, BS, UK and AU multi-plugs power supply

K42937

As above, with 1 DIN (60715 TH35) rail power supply 40103



K42912

Additional hands-free monitor, 7" LCD colour display, capacitive keypad with EU, BS, UK and AU multi-plugs power supply

K42932

As above, with 1 DIN (60715 TH35) rail power supply 40103



42920.P

Additional audio/video entrance panel with rain-proof frame configurable for 1 or 2 families



▲ 42920.F

Kit with frame, mounting frame, flush mounting box for flush mounting entrance panel 40980.P and 42920.P



42920.K

1-2-4 button kit for RFID Video kit entrance panel (40980.P and 42920.P)



40169

7 Mifare coloured RFID cards



40104

24 Vdc 1 A multi-plugs power supply for EU, UK, USA and AU standards



40103

Power supply 120/230 V-50/60 Hz for DIN (60715 TH35) rail installation



42920.D

Bus distributor for Video RFID kit to be used to separate the bus into 4 lines



46CAM.136B.8

IR AHD Bullet outdoor camera, 1080p, 3,6 mm lens, CVBS



46902.010

12 Vdc 1 A power supply, integrated Europlug 2P plug



View Door app available for iOS and Android operating systems, downloadable from Apple and Google Play stores.

BC25014 EN 2507
8 0017352 792203

Energia Positiva. Insieme



Viale Vicenza, 14 36063 Marostica VI - Italy Tel. +39 0424 488 600 www.vimar.com