



Ω HOME®
ILLUMINAZIONE

IP 20

PANNELLI/PANELS

PANNELLO_LED 60X60
PANNELLO_LED 60X60 UGR<19
PANNELLO_LED 30X120
PANNELLO_LED 30X120 UGR<19

LAMPADA RICARICABILE RECHARGEABLE LAMP

3in1

INCASSI/DOWN LIGHTS

LEDSPOT_TRP1
LEDSPOT_MULTI-LIGHT

IP>44

INDUSTRIALE/INDUSTRIAL

STAGNA_IP65

SOFFITTO PARETE/CEILING WALL

ALLinONE_330
PLAFOLED_T_CCT
LUNA_T_EVO
LUNA_O_EVO
ORFEO_T
ORFEO_Q
EOS_T
EOS_Q
TILE 100
TILE 200
TILE 300
TILE 250



PROIETTORI/FLOOD LIGHTS

AKRON
LAMPO
PIKKO

TERRA/FLOOR

KANDO_T

PANNELLO_LED

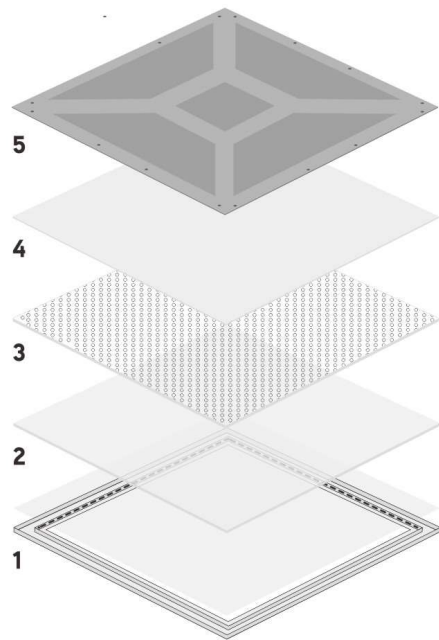


CORNICE ALLUMINIO CON STRISCE LED
 Profilo in alluminio da 290 gr concepito per una migliore dissipazione del calore e dotato di una struttura meccanicamente più stabile. Cornice di alluminio con striscia LED con chip 4014 ad alta efficienza anziché chip 2835 a bassa efficienza luminosa.

ALUMINIUM FRAME WITH LED STRIPS
 Aluminium frame with 290g structure provides a better heat dissipation and a more stable mechanical structure. Led strips high lumen efficiency 4014 chip instead of low efficiency 2835 chip.



DIFFUSORE
 Diffusore in PS da 1,2 mm garantisce l'uniformità dell'emissione ed il mantenimento della temperatura colore (°K). Non usiamo diffusori in PP che ingialliscono in breve tempo modificando la temperatura di colore.

DIFFUSER
 1,2 mm PS diffuser ensures light smoothness and colour temperature maintenance (°K) over time. We do not mount PP diffusers which turn yellowish and modify the colour temperature in a very short time



LGP
 In PMMA da 2,8 mm di qualità assicura un alto indice di mantenimento del flusso luminoso anziché PP o PS che causano un decadimento del flusso luminoso nel breve periodo.

LGP
 2,8 mm quality PMMA LGP ensures high luminous flux maintenance over time instead of PP or PS which cause a drastic lumen depreciation.



CARTA RIFLETTENTE
 Foglio PET a doppio rivestimento che migliora l'efficienza luminosa.

PAPER REFLECTOR
 Double coated PET sheet which improves light efficiency.



TAMPONAMENTO DI CHIUSURA

CLOSING SHEET




PANNELLI PANNELLO_LED 60X60 UGR<19



Apparecchio da incasso/
soffitto/sospensione LED integrato
Corpo in alluminio verniciato
LGP in PMMA
Diffusore in PS
Driver incluso

Recessed/ceiling/suspension fitting
with built-in LED
Painted aluminium body
PMMA LGP
PS Diffuser
Driver included
L80B30_50000hrs




42538
cornice per montaggio cartongesso /
frame for recessed mounting
620x620




42539
accessorio soffitto H mm.43



11622/2
accessorio sospensione H mt.2 /
suspension accessory H mt.2




Sorgente luminosa sostituibile
solo da tecnico abilitato
Replaceable light source by
a professional




Driver sostituibile solo da
tecnico abilitato
Replaceable control gear by
a professional

PANNELLI PANNELLO_LED 60X60



Apparecchio da incasso/
soffitto/sospensione LED integrato
Corpo in alluminio verniciato
LGP in PMMA
Diffusore in PS
Driver incluso

Recessed/ceiling/suspension fitting
with built-in LED
Painted aluminium body
PMMA LGP
PS Diffuser
Driver included
L80B30_50000hrs




42538
cornice per montaggio cartongesso /
frame for recessed mounting
620x620




42539
accessorio soffitto H mm.43



11622/2
accessorio sospensione H mt.2 /
suspension accessory H mt.2



Sorgente luminosa sostituibile
solo da tecnico abilitato
Replaceable light source by
a professional



Driver sostituibile solo da
tecnico abilitato
Replaceable control gear by
a professional


CODICE / CODE	41649	41650
BEAM	110	110
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	3600	4000
Sorgente luminosa W / Light Source W:	36W	36W
Sorgente luminosa / Light Source lumen:	4600	4600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	230V 50/60Hz	230V 50/60Hz
DRIVER	1000mA/25-40V flicker-free	1000mA/25-40V flicker-free
KG	2,3	2,3
PCS	5	5
DIMENSIONI / DIMENSIONS		
a	595	595
b	8,5	8,5

ACCESSORI	42683 Driver ONE4ALL 220-240V 12-42V 650-1110mA Dali, Push, I-10V	listino prezzi Logica/Logica pricelist
ACCESSORIES	40314 Driver 110-277V 14-42V 400-1100mA I-10V	
	12551 Emergenza/Emergency 30%- 90min MAX 40W	listino prezzi Logica/Logica pricelist

CODICE / CODE	41653	41654
BEAM	110	110
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	3600	4000
Sorgente luminosa W / Light Source W:	36W	36W
Sorgente luminosa / Light Source lumen:	4600	4600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	230V 50/60Hz	230V 50/60Hz
DRIVER	1000mA/25-40V flicker-free	1000mA/25-40V flicker-free
KG	2,6	2,6
PCS	5	5
DIMENSIONI / DIMENSIONS		
a	595	595
b	9	9


ACCESSORI	42683 Driver ONE4ALL 220-240V 12-42V 650-1110mA Dali, Push, I-10V	listino prezzi Logica/Logica pricelist
ACCESSORIES	40314 Driver 110-277V 14-42V 400-1100mA I-10V	
	12551 Emergenza/Emergency 30%- 90min MAX 40W	listino prezzi Logica/Logica pricelist

PANNELLI PANNELLO_LED 30X120



Apparecchio da incasso/
soffitto/sospensione LED integrato
Corpo in alluminio verniciato
LGP in PMMA
Diffusore in PS
Driver incluso


Recessed/ceiling/suspension fitting
with built-in LED
Painted aluminium body
PMMA LGP
PS Diffuser
Driver included
L80B30_50000hrs



42542
cornice per montaggio cartongesso /
frame for recessed mounting
320x1220



42540
accessorio soffitto H mm 43/
ceiling accessory H mm 43



11622/3
accessorio sospensione H mt.2 /
suspension accessory H mt.2

Sorgente luminosa sostituibile
solo da tecnico abilitato
Replaceable light source by
a professional

Driver sostituibile solo da
tecnico abilitato
Replaceable control gear by
a professional



CODICE / CODE	41651	41652
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	3600	4000
Sorgente luminosa W / Light Source W:	36W	36W
Sorgente luminosa / Light Source lumen:	4600	4600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	230V 50/60Hz	230V 50/60Hz
DRIVER	1000mA/25-40V flicker-free	1000mA/25-40V flicker-free
KG	2,6	2,6
PCS	5	5

DIMENSIONI / DIMENSIONS		
a	1195	1195
b	295	295
c	9	9


ACCESSORI	42683	Driver ONE4ALL 220-240V 12-42V 650-1110mA Dali, Push, I-10V	listino prezzi Logica/Logica pricelist
ACCESSORIES	40314	Driver 110-277V 14-42V 400-1100mA I-10V	
	12551	Emergenza/Emergency 30%- 90min MAX 40W	listino prezzi Logica/Logica pricelist

PANNELLI PANNELLO_LED 30X120 UGR<19



Apparecchio da incasso/
soffitto/sospensione LED integrato
Corpo in alluminio verniciato
LGP in PMMA
Diffusore in PS
Driver incluso

Recessed/ceiling/suspension fitting
with built-in LED
Painted aluminium body
PMMA LGP
PS Diffuser
Driver included
L80B30_50000hrs



42542
cornice per montaggio cartongesso /
frame for recessed mounting
320x1220



42540
accessorio soffitto H mm 43/
ceiling accessory H mm 43



11622/3
accessorio sospensione H mt.2 /
suspension accessory H mt.2

Sorgente luminosa sostituibile
solo da tecnico abilitato
Replaceable light source by
a professional

Driver sostituibile solo da
tecnico abilitato
Replaceable control gear by
a professional



CODICE / CODE	41655	41656
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	3600	4000
Sorgente luminosa W / Light Source W:	36W	36W
Sorgente luminosa / Light Source lumen:	4600	4600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	230V 50/60Hz	230V 50/60Hz
DRIVER	1000mA/25-40V flicker-free	1000mA/25-40V flicker-free
KG	2,6	2,6
PCS	5	5

DIMENSIONI / DIMENSIONS		
a	1195	1195
b	295	295
c	9	9

ACCESSORI	42683	Driver ONE4ALL 220-240V 12-42V 650-1110mA Dali, Push, I-10V	listino prezzi Logica/Logica pricelist
ACCESSORIES	40314	Driver 110-277V 14-42V 400-1100mA I-10V	
	12551	Emergenza/Emergency 30%- 90min MAX 40W	listino prezzi Logica/Logica pricelist

3in1 LAMPADA RICARICABILE



Lampada ricaricabile wireless dimmerabile e multifunzione:



- Lampada Tavolo
- Base magnetica per installazione parete
- Lampada con clip

3 temperature colore selezionabili
Corpo in ABS

Wireless, rechargeable, dimmable, multi-function lamp

- Table Lamp
- Magnetic base for wall installation
- Clip lamp

3 selectable colour temperatures
ABS plastic body

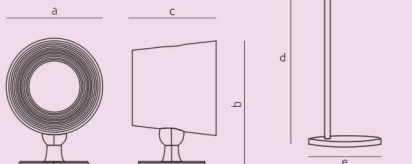

CODICE / CODE	42533	42534
COLORE / COLOUR	bianco/white	nero/black
COLORE LUCE / COLOR T	3000K/4000K/6000K	3000K/4000K/6000K
LUMEN	120	120
Sorgente luminosa W / Light Source W:	2W	2W
Sorgente luminosa / Light Source lumen:	210	210
Class Energetica/Energy Class:	F	F
CRI	>80	>80
LED	BMTC	BMTC
WATT	2W	2W
PF	>0.7	>0.7
SUPPLY	DC 5V	DC 5V
KG	0.85	0.85
PCS	10	10
DIMENSIONI / DIMENSIONS		
a	∅85	∅85
b	110	110
c	75	75
d	355	355
e	120	120




Interruttore Switch



Base magnetica Magnetic Base



Regolazioni Rotation angle

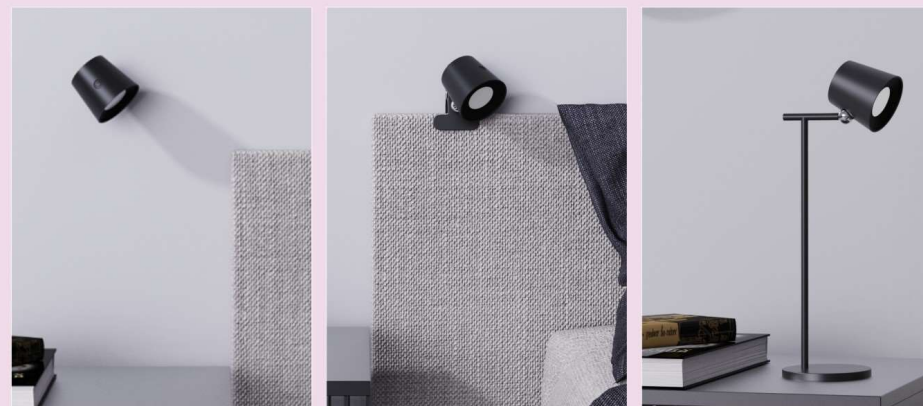

INCASSI LEDSPOT_TRP1



Incasso LED integrato
Corpo in TRP
Diffusore in PC opale
Driver integrato

Recessed fitting with built-in LED
TRP body
Opal PC diffuser
Built-in driver



CODICE / CODE	40517	40518
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	243 l	2487
Sorgente luminosa W / Light Source W:	30W	30W
Sorgente luminosa / Light Source lumen:	3300	3600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	Epistar	Epistar
WATT	30W	30W
PF	>0.9	>0.9
SUPPLY	230V 50/60Hz	230V 50/60Hz
FORO / HOLE	200	200
KG	0,45	0,45
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	Ø230	Ø230
b	60	60



IP20

INCASSI LEDSPOT_MULTI-LIGHT



Incasso LED integrato
Corpo in TRP
Diffusore in PC opale
Driver integrato
Temperatura colore selezionabile

Recessed fitting with built-in LED
TRP body
Opal PC diffuser
Built-in driver
Selectable colour temperature



CODICE / CODE	40581
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	1962/2040/2088
Sorgente luminosa W / Light Source W:	24W
Sorgente luminosa / Light Source lumen:	2852/3152/3182
Class Energetica/Energy Class:	E
CRI	>80
LED	Epistar
WATT	24W
PF	>0.5
SUPPLY	230V 50/60Hz
FORO / HOLE	190
KG	0,14
PCS	40
DIMENSIONI / DIMENSIONS	
a	Ø220
b	25,5

IP20



INDUSTRIALE STAGNA_IP65



Corpo in ABS e diffusore in PS
 Base struttura interna in metallo
 600mm 4 clips di chiusura
 1200mm 10 clips di chiusura
 1500mm 12 clips di chiusura
 Collegamento diretto tensione di rete
 Solo per tubi LED 230V

ABS body + PS diffuser
 Internal tray in plated iron
 600mm 4 latches
 1200mm 10 latches
 1500mm 12 latches
 Direct connection to mains voltage
 Only for LED tubes 230V




CODICE / CODE	41555	41556	41557	41558	41559	41560
	Mono	Mono	Mono	Bi	Bi	Bi
KG	0,53	0,90	1,19	0,67	1,22	1,57
PCS	12	12	8	8	4	4
DIMENSIONI / DIMENSIONS						
a	655	1263	1564	655	1263	1564
b	66	66	66	106	106	106
c	90	90	90	90	90	90

SOFFITTO/PARETE ALLinONE_330




Apparecchio LED integrato
Corpo in TRP
Driver integrato

Built-in LED fitting
TRP body
Built-in driver



CODICE / CODE	40151	40151	40151
BEAM	120°	120°	120°
COLORE / COLOUR	bianco/white	bianco/white	bianco/white
COLORE LUCE / COLOR T	2700K/3000K/4000K/5000K/6500K	2700K/3000K/4000K/5000K/6500K	2700K/3000K/4000K/5000K/6500K
LUMEN	1300/1350/1450/1450/1450	1700/1750/1900/1900/1900	2050/2100/2350/2350/2350
Sorgente luminosa W / Light Source W:	15W	20W	25W
Sorgente luminosa / Light Source lumen:	2300/2320/2380/2380/2380	3000/3050/3180/3180/3180	3500/3550/3800/3800/3800
Class Energetica/Energy Class:	D	D	D
CRI	>80	>80	>80
LED	HONGLI	HONGLI	HONGLI
WATT	15W	20W	25W
PF	>0,5	>0,5	>0,5
SUPPLY	220-240V_50/60Hz	220-240V_50/60Hz	220-240V_50/60Hz
KG	0,97	0,97	0,97
PCS	10	10	10
DIMENSIONI / DIMENSIONS			
a	Ø 330	Ø 330	Ø 330
b	70	70	70

Funzioni principali/Main functions

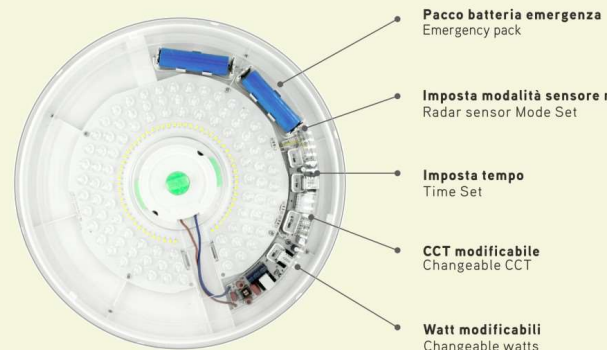

Pacco batteria emergenza
Emergency pack
300Lm 4Hrs(Charing time:24Hrs)

Imposta modalità sensore radar
Radar sensor Mode Set

- Normal
- Radar Sensor(Day and Night)
- Radar Sensor(Night)

Imposta tempo/Time Set

- 30S
- 60S
- 180S

CCT modificabile /Changeable CCT

- 2700K
- 3000K
- 4000K
- 5000K
- 6500K

Watt modificabili/Changeable watts

- 15 W
- 20 W
- 25 W

Sensore Radar /Radar sensor

Sensore
Sensor

Angolo/Angle

Modalità impostata
Mode Set

Normal

ON/OFF

Modalità impostata
Mode Set

Radar Sensor(Day and Night)

Alla luce del giorno o di notte la plafoniera si accenderà non appena si entra nell'area di rilevazione
In daylight or at night it will automatically light up as you enter the sensor area

Modalità impostata
Mode Set

Radar Sensor(Night)


Di notte la plafoniera si accenderà non appena si entra nell'area di rilevazione
At night it will automatically light up as you enter the sensor area

SOFFITTO/PARETE PLAFOLED_T_CCT



Apparecchio da soffitto LED integrato
Corpo in metallo verniciato
Diffusore in MS
Driver incluso


Ceiling fitting Painted metal body
MS diffuser
Driver included

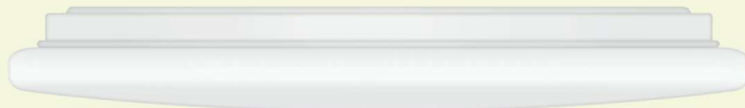


a



b



CODICE / CODE	41048	41049
BEAM	120°	120°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K	3000K/4000K/6000K
LUMEN	1938	2584
Sorgente luminosa W / Light Source W:	24W	32W
Sorgente luminosa / Light Source lumen:	2500	3400
Class Energetica/Energy Class:	F	F
CRI	>80	>80
LED	Nationstar	Nationstar
WATT	24W	32W
PF	0,7	0,7
SUPPLY	220-240V_50/60Hz	220-240V_50/60Hz
DRIVER	80mA/252V	200mA/144V
KG	0,7	0,5
PCS	10	10
DIMENSIONI / DIMENSIONS		
a	∅ 334	∅ 376
b	52	52

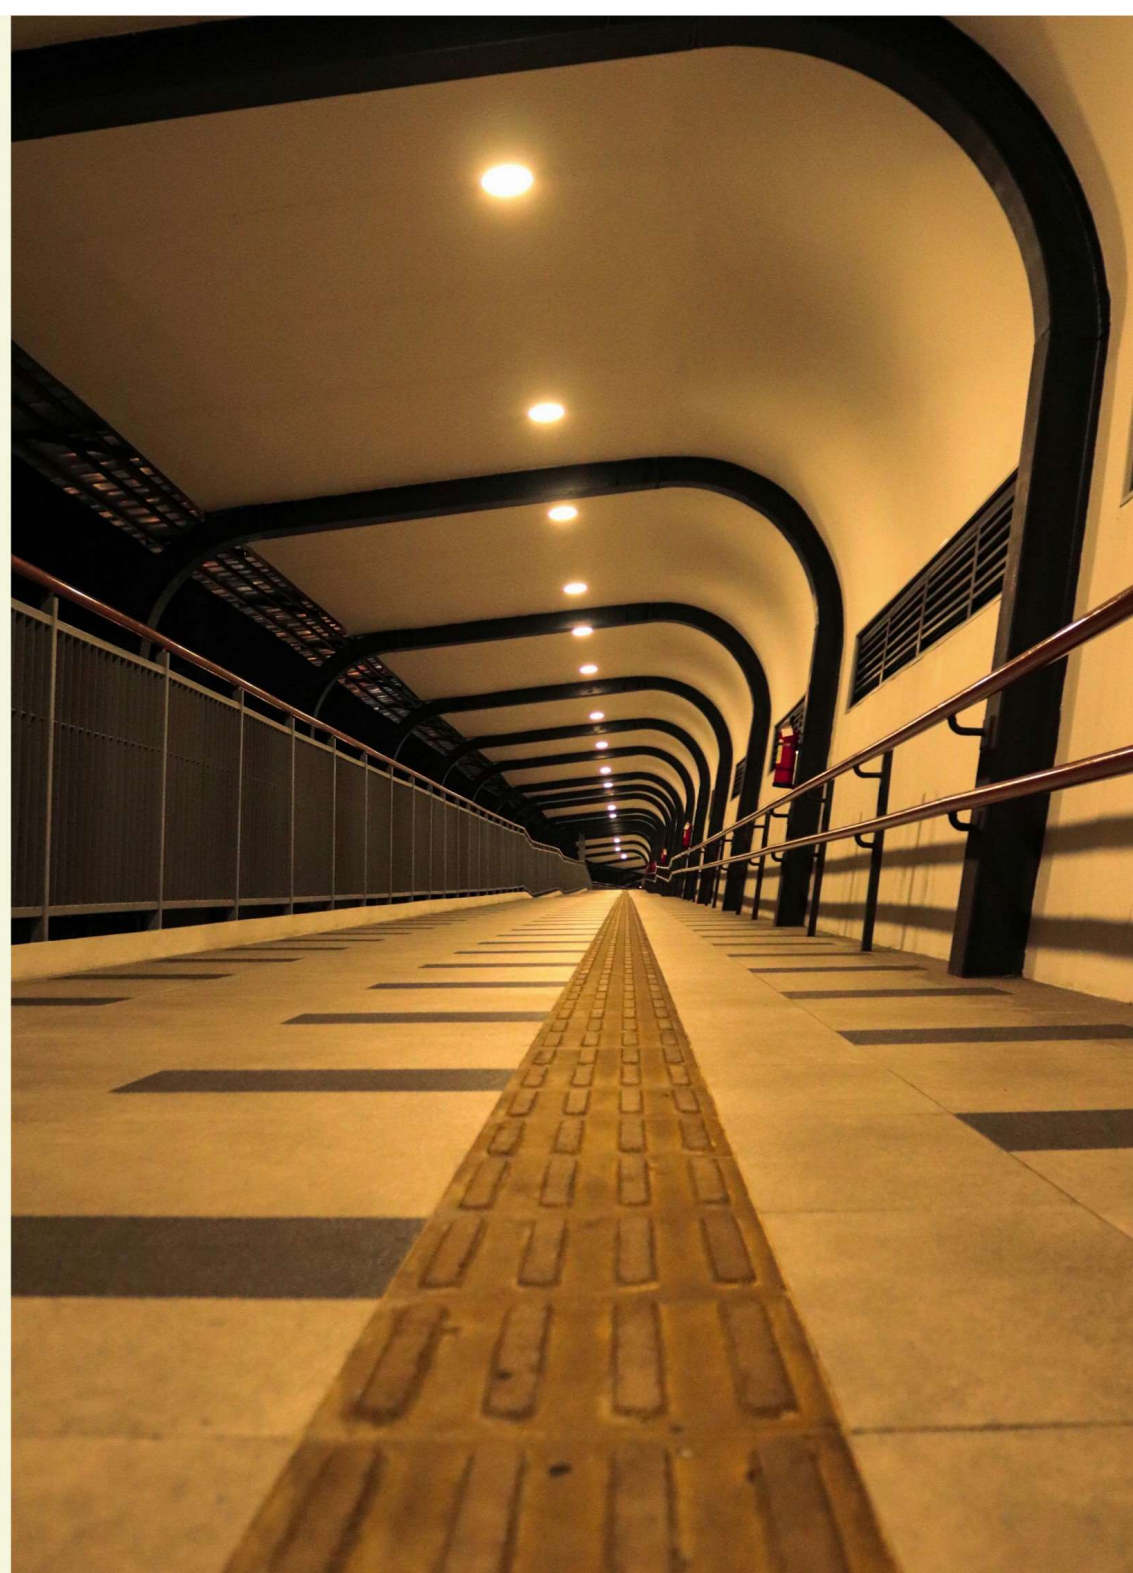


SOFFITTO LUNA_T_EVO




Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver



CCT modificabile
Changeable CCT

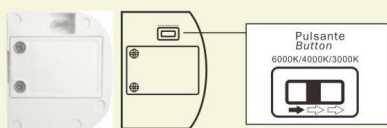

CODICE / CODE	41050	41051
BEAM	110°	110°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K	3000K/4000K/6000K
LUMEN	1250/1300/1350	1900/1950/2000
Sorgente luminosa W / Light Source W:	12W	18W
Sorgente luminosa / Light Source lumen:	1550/1580/1610	2350/2380/2410
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	Epistar	Epistar
WATT	12W	18W
PF	>0,5	>0,5
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,217	0,295
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	∅181	∅222
b	47	47

IP>44

SOFFITTO LUNA_O_EVO




Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver



CCT modificabile
Changeable CCT

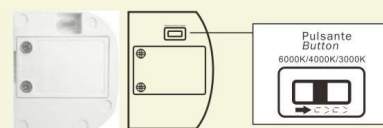

CODICE / CODE	41053	41054
BEAM	110°	110°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K	3000K/4000K/6000K
LUMEN	1250/1300/1350	1900/1950/2000
Sorgente luminosa W / Light Source W:	12W	18W
Sorgente luminosa / Light Source lumen:	1550/1580/1610	2350/2380/2410
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	Epistar	Epistar
WATT	12W	18W
PF	>0,5	>0,5
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,219	0,312
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	205	267
b	105	137
c	47	47



IP>44

PARETE ORFEO_T



Apparecchio LED integrato
Corpo in TRP
Schermo in PC satinato
Luce diretta ed indiretta
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Frosted PC screen
Direct and indirect lighting
Built-in driver
Selectable colour temperature





CODICE / CODE	43366
BEAM	60°
COLORE / COLOUR	nero/black
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	850+850/880+880/900+900
Sorgente luminosa W / Light Source W:	9+9W
Sorgente luminosa / Light Source lumen:	1100+1100/1150+1150/1200+1200
Class Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	9+9W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,316
PCS	20
DIMENSIONI / DIMENSIONS	
a	78
b	162
c	99

PARETE ORFEO_Q



Apparecchio LED integrato
Corpo in TRP
Schermo in PC satinato
Luce diretta ed indiretta
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Frosted PC screen
Direct and indirect lighting
Built-in driver
Selectable colour temperature

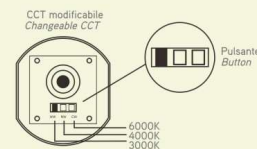



CODICE / CODE	43367
BEAM	60°
COLORE / COLOUR	nero/black
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	850+850/880+880/900+900
Sorgente luminosa W / Light Source W:	9+9W
Sorgente luminosa / Light Source lumen:	1100+1100/1150+1150/1200+1200
Class Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	9+9W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,344
PCS	20
DIMENSIONI / DIMENSIONS	
a	78
b	162
c	99

PARETE ORFEO_T



Apparecchio LED integrato
Corpo in TRP
Schermo in PC satinato
Luce diretta o indiretta
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Frosted PC screen
Direct or indirect lighting
Built-in driver
Selectable colour temperature





CODICE / CODE	43368
BEAM	60°
COLORE / COLOUR	nero/black
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	850/880/900
Sorgente luminosa W / Light Source W:	9W
Sorgente luminosa / Light Source lumen:	1100/1150/1200
Class Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	9W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,23
PCS	20
DIMENSIONI / DIMENSIONS	
a	78
b	117
c	99

PARETE ORFEO_Q



Apparecchio LED integrato
Corpo in TRP
Schermo in PC satinato
Luce diretta o indiretta
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Frosted PC screen
Direct or indirect lighting
Built-in driver
Selectable colour temperature

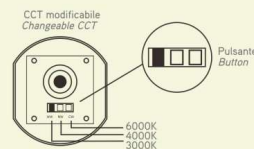


CODICE / CODE	43369
BEAM	60°
COLORE / COLOUR	nero/black
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	850/880/900
Sorgente luminosa W / Light Source W:	9W
Sorgente luminosa / Light Source lumen:	1100/1150/1200
Class Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	9W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,25
PCS	20
DIMENSIONI / DIMENSIONS	
a	78
b	117
c	99

PARETE EOS_T




Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature



Gabbia rimovibile
Black cage removable

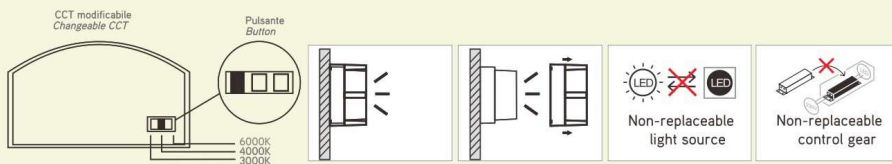


CODICE / CODE	43370
COLORE / COLOUR	nero/black
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	1200/1250/1300
Sorgente luminosa W / Light Source W:	15W
Sorgente luminosa / Light Source lumen:	1850/1900/1950
Class Energetica/Energy Class:	E
CRI	>80
LED	Epistar
WATT	15W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,373
PCS	20
DIMENSIONI / DIMENSIONS	
a	Ø170
b	110

PARETE EOS_Q





Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature

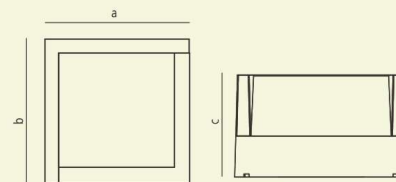

Gabbia rimovibile
Black cage removable

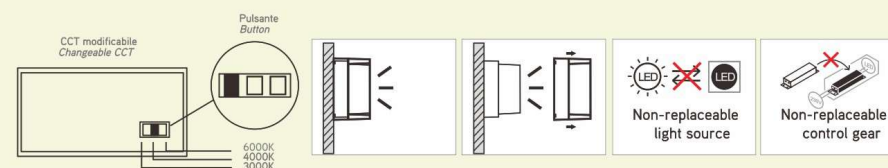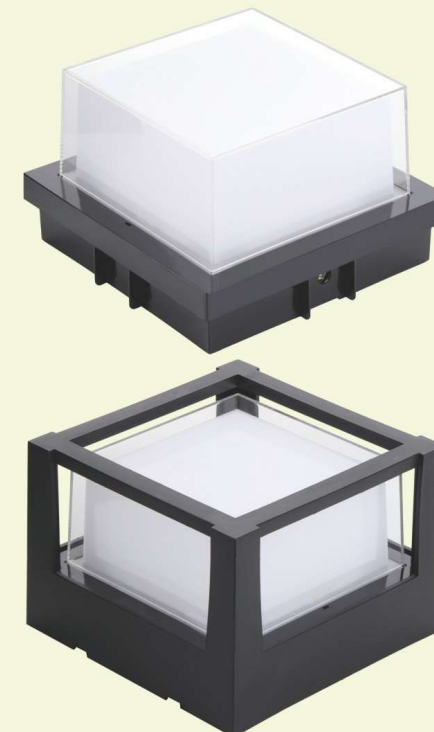



CODICE / CODE	43371
COLORE / COLOUR	nero/black
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	1200/1250/1300
Sorgente luminosa W / Light Source W:	15W
Sorgente luminosa / Light Source lumen:	1850/1900/1950
Class Energetica/Energy Class:	E
CRI	>80
LED	Epistar
WATT	15W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,415
PCS	20
DIMENSIONI / DIMENSIONS	
a	160
b	160
c	110

PARETE TILE 100



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature





CODICE / CODE	41275
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	600/620/640
Sorgente luminosa W / Light Source W:	5W
Sorgente luminosa / Light Source lumen:	740/760/780
Class Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	5W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,159
PCS	20
DIMENSIONI / DIMENSIONS	
a	100
b	100
c	75

PARETE TILE 200



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature





CODICE / CODE	41276
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	950/1000/1050
Sorgente luminosa W / Light Source W:	8W
Sorgente luminosa / Light Source lumen:	1200/1220/1240
Class Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	8W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,272
PCS	20
DIMENSIONI / DIMENSIONS	
a	100
b	200
c	75

PARETE TILE 300



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature





CODICE / CODE	41277
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	1700/1750/1800
Sorgente luminosa W / Light Source W:	15W
Sorgente luminosa / Light Source lumen:	2050/2100/2150
Class Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	15W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,369
PCS	20
DIMENSIONI / DIMENSIONS	
a	100
b	300
c	75

PARETE TILE 250



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature

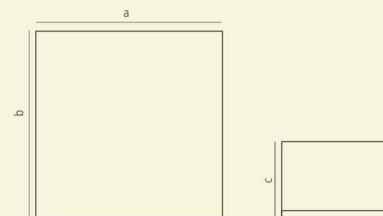


CODICE / CODE	41278
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	2300/2530/2400
Sorgente luminosa W / Light Source W:	20W
Sorgente luminosa / Light Source lumen:	2750/2850/2950
Class Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	20W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,415
PCS	20
DIMENSIONI / DIMENSIONS	
a	250
b	250
c	75

PROIETTORI AKRON



Proiettore LED integrato
Corpo in pressofusione di alluminio
Schermo in PC trasparente con lenti
Driver incluso

LED Floodlight
Die-cast aluminium body
Transparent PC diffuser with lenses
Built-in driver

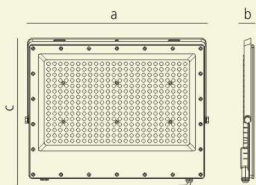

CODICE / CODE	41263	41264	41265	41266
BEAM	60°	60°	60°	60°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	3000K	3000K	3000K	3000K
LUMEN 360	4500	9500	19000	29000
LUMEN 90	4000	8200	16500	24800
Class Energetica/Energy Class:	F	F	F	F
CRI	>80	>80	>80	>80
LED	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835
WATT	50W	100W	200W	300W
PF	>0,9	>0,9	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,55	1	1,68	2,56
PCS	20	10	5	5
DIMENSIONI / DIMENSIONS				
a	234	282	383	433
b	24	24	26	31,5
c	178	222	295	340

CODICE / CODE	41267	41268	41269	41270
BEAM	60°	60°	60°	60°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	4000K	4000K	4000K	4000K
LUMEN 360	4550	9550	19050	29050
LUMEN 90	4050	8250	16550	24850
Class Energetica/Energy Class:	F	F	F	F
CRI	>80	>80	>80	>80
LED	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835
WATT	50W	100W	200W	300W
PF	>0,9	>0,9	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,55	1	1,68	2,56
PCS	20	10	5	5
DIMENSIONI / DIMENSIONS				
a	234	282	383	433
b	24	24	26	31,5
c	178	222	295	340



CODICE / CODE	41271	41272	41273	41274
BEAM	60°	60°	60°	60°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	6500K	6500K	6500K	6500K
LUMEN 360	4600	9600	19100	29100
LUMEN 90	4100	8300	16600	24900
Class Energetica/Energy Class:	F	F	F	F
CRI	>80	>80	>80	>80
LED	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835
WATT	50W	100W	200W	300W
PF	>0,9	>0,9	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,55	1	1,68	2,56
PCS	20	10	5	5
DIMENSIONI / DIMENSIONS				
a	234	282	383	433
b	24	24	26	31,5
c	178	222	295	340

PROIETTORI LAMPO_EVO_CCT



Proiettore LED integrato nero
Corpo in pressofusione di alluminio
Diffusore in vetro satinato e driver integrato

Black LED Floodlight
Die-cast aluminium body
Frosted glass diffuser
Built-in driver



CODICE / CODE	41929	41930
BEAM	120°	120°
COLORE / COLOUR	nero/black	nero/black
COLORE LUCE / COLOR T	3000K/4000K/6000K	3000K/4000K/6000K
LUMEN	850lm/900lm/870lm	1700lm/1800lm/1740lm
Sorgente luminosa W / Light Source W:	10W	20W
Sorgente luminosa / Light Source lumen:	1100lm/1150lm/1120lm	2200lm/2300lm/2240lm
Class Energetica/Energy Class:	E	E
CRI	>80	>80
WATT	10W	20W
PF	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0.187	0.212
PCS	40	40
DIMENSIONI / DIMENSIONS		
a	100	110
b	75	85
c	35	35


CODICE / CODE	41931	41932
BEAM	120°	120°
COLORE / COLOUR	nero/black	nero/black
COLORE LUCE / COLOR T	3000K/4000K/6000K	3000K/4000K/6000K
LUMEN	2550lm/2700lm/2610lm	4250lm/4500lm/4350lm
Sorgente luminosa W / Light Source W:	30W	50W
Sorgente luminosa / Light Source lumen:	3300lm/3450lm/3360lm	5500lm/5750lm/5600lm
Class Energetica/Energy Class:	E	E
CRI	>80	>80
WATT	30W	50W
PF	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0.255	0.435
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	132	180
b	108	130
c	35	35

PROIETTORI PIKKO



Proiettore E27 completo di lampada PAR IP65 3000K 40° I 15°
Corpo in materiale plastico

E27 outdoor fitting with IP65 3000K PAR 40° or I 15° included
Plastic body



F



- APPARECCHIO COMPLETO DI LAMPADA IP65
- FITTING WITH IP65 BULB INCLUDED



CODICE / CODE	41791	41792
BEAM	40°	115°
COLORE / COLOUR	nero/black	nero/black
COLORE LUCE / COLOR T	3000K	3000K
LAMP	E27	E27
WATT	6W	6W
LUMEN @ 360	550	550
LUMEN @ 120		520
LUMEN @ 90	530	
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,175	0,175
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	118	118
b	94	94
c	176	176
d	154	154

CODICE / CODE	41793	41794
BEAM	40°	115°
COLORE / COLOUR	nero/black	nero/black
COLORE LUCE / COLOR T	3000K	3000K
LAMP	E27	E27
WATT	10W	10W
LUMEN @ 360	900	900
LUMEN @ 120		860
LUMEN @ 90	870	
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,258	0,258
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	135	135
b	126	126
c	178	178
d	154	154

CODICE / CODE	41795	41796
BEAM	40°	115°
COLORE / COLOUR	nero/black	nero/black
COLORE LUCE / COLOR T	3000K	3000K
LAMP	E27	E27
WATT	15W	15W
LUMEN @ 360	1300	1300
LUMEN @ 120		1240
LUMEN @ 90	1250	
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,318	0,318
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	151	151
b	151	151
c	200	200
d	154	154

TERRA KANDO_T

LED HALO     IP67 IK10 CE

Incasso calpestabile
Corpo in pressofusione di alluminio
Anello in acciaio inox AISI 316
Vetro temperato trasparente
Cassaforma in PVC

Walk-over recessed fitting
Die-cast aluminium body
AISI 316 stainless steel ring
Transparent tempered glass
PVC frame-work



CODICE / CODE	40157
COLORE / COLOUR	INOX
LAMP	GU10
WATT	HALO Max 50W
SUPPLY	230V 50/60Hz
FORO / HOLE	Ø100
KG	0,7
PCS	20
DIMENSIONI / DIMENSIONS	
a	110
b	100
c	122
d	140

ACCESSORI 40015 Connettore IP67 una via
ACCESSORIES 40016 Connettore IP67 una via

