

IP 20

INCASSI/DOWN LIGHTS

LEDSPOT_MULTI-LIGHT

IP>44

INDUSTRIALE/INDUSTRIAL

STAGNA_IP65

SOFFITTO PARETE/CEILING WALL

ALLinONE_330

LUNA_T_EVO

LUNA_O_EVO

TILE 100

TILE 200

TILE 300

TILE 250

PROIETTORI/FLOOD LIGHTS

AKRON


LAMPO

TERRA/FLOOR



KANDO_T

Ω HOMEGA®
ILLUMINAZIONE


INCASSI LEDSPOT_MULTI-LIGHT



- Incasso LED integrato
- Corpo in TRP
- Diffusore in PC opale
- Driver integrato
- Temperatura colore selezionabile
- Recessed fitting with built-in LED
- TRP body
- Opal PC diffuser
- Built-in driver
- Selectable colour temperature




CODICE / CODE	4058 I
COLORE / COLOUR	Bianco/White
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	1962/2040/2088
Sorgente luminosa W / Light Source W:	24W
Sorgente luminosa / Light Source lumen:	2852/3152/3182
Class Energetica/Energy Class:	E
CRI	>80
LED	Epistar
WATT	24W
PF	>0.5
SUPPLY	230V 50/60Hz
FORO / HOLE	190
KG	0.14
PCS	40
DIMENSIONI / DIMENSIONS	
a	Ø 220
b	25.5

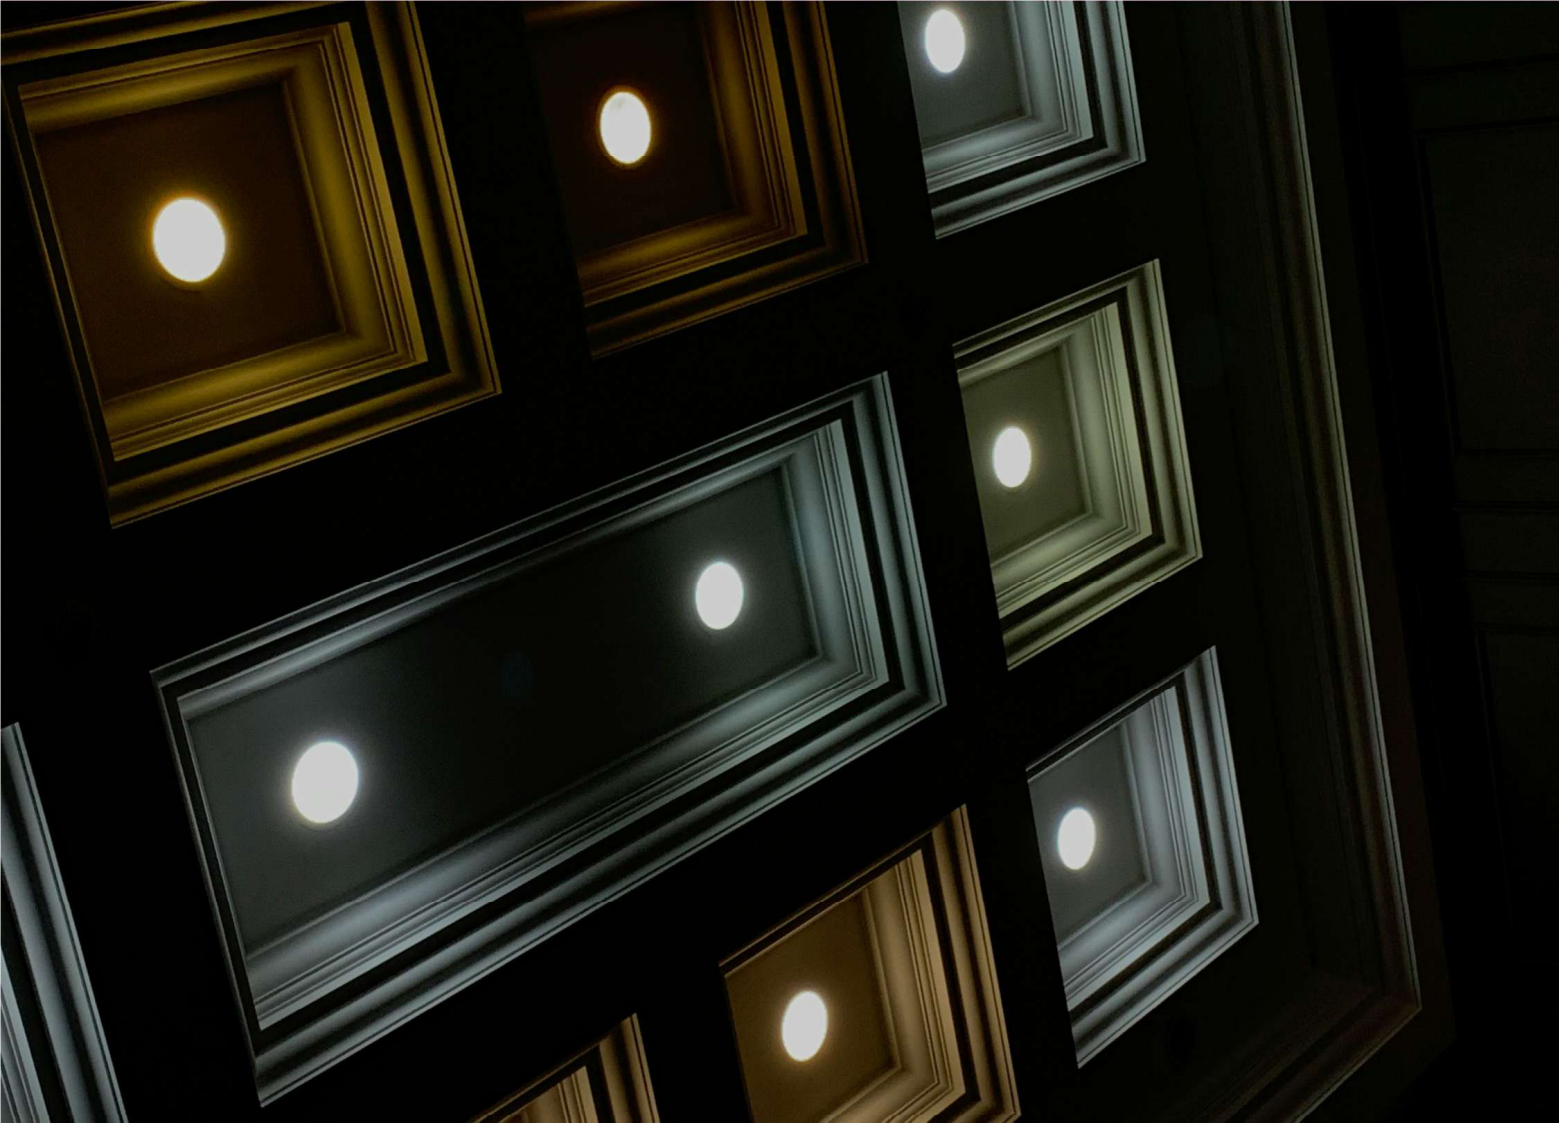


INDUSTRIALE

STAGNA_IP65



Corpo in ABS e diffusore in PS
Base struttura interna in metallo
600mm 4 clips di chiusura
1200mm 10 clips di chiusura
1500mm 12 clips di chiusura
Collegamento diretto tensione di rete
Solo per tubi LED 230V

ABS body + PS diffuser
Internal tray in plated iron
600mm 4 latches
1200mm 10 latches
1500mm 12 latches
Direct connection to mains voltage
Only for LED tubes 230V



CODICE / CODE	41555	41556	41557	41558	41559	41560
	Mono	Mono	Mono	Bi	Bi	Bi
KG	0.53	0.90	1.19	0.67	1.22	1.57
PCS	12	12	8	8	4	4
DIMENSIONI / DIMENSIONS						
a	655	1263	1564	655	1263	1564
b	66	66	90	106	106	106
c	90	90	90	90	90	90



IP>44

SOFFITTO/PARETE ALLinONE_330



Apparecchio LED integrato
Corpo in TRP
Driver integrato

Built-in LED fitting
TRP body
Built-in driver



CODICE / CODE	40151	40151	40151
BEAM	120°	120°	120°
COLORE / COLOUR	bianco/white	bianco/white	bianco/white
COLORE LUCE / COLOR T	2700K/3000K/4000K/5000K/6500K	2700K/3000K/4000K/5000K/6500K	2700K/3000K/4000K/5000K/6500K
LUMEN	1300/1350/1450/1450/1450	1700/1750/1900/1900/1900	2050/2100/2350/2350/2350
Sorgente luminosa W / Light Source W:	15W	20W	25W
Sorgente luminosa / Light Source lumen:	2300/2320/2380/2380/2380	3000/3050/3180/3180/3180	3500/3550/3800/3800/3800
Class Energetical/Energy Class:	D	D	D
CRI	>80	>80	>80
LED	HONGLI	HONGLI	HONGLI
WATT	15W	20W	25W
PF	>0,5	>0,5	>0,5
SUPPLY	220-240V_50/60Hz	220-240V_50/60Hz	220-240V_50/60Hz
KG	0,97	0,97	0,97
PCS	10	10	10
DIMENSIONI / DIMENSIONS			
a	Ø 330	Ø 330	Ø 330
b	70	70	70

Funzioni principali/Main functions

Pacco batteria emergenza
Emergency pack
300Lm 4Hrs(Charing time:24Hrs)

Imposta modalità sensore radar
Radar sensor Mode Set

- Normal
- Radar Sensor(Day and Night)
- Radar Sensor(Night)

Imposta tempo
Time Set

- 30S
- 60S
- 180S

CCT modificabile
Changeable CCT

- 2700K
- 3000K
- 4000K
- 5000K
- 6500K

Watt modificabili
Changeable watts

- 15W
- 20W
- 25W

Sensore Radar /Radar sensor

Sensore
Sensor

Angolo/Angle

Modalità impostata
Mode Set

Normal

Modalità impostata
Mode Set

Radar Sensor(Day and Night)

Modalità impostata
Mode Set

Radar Sensor(Night)

ON/OFF

Di notte la plafoniera si accenderà non appena si entra nell'area di rilevazione.
At night it will automatically light up as you enter the sensor area

Alla luce del giorno o di notte la plafoniera si accenderà non appena si entra nell'area di rilevazione.
In daylight or at night it will automatically light up as you enter the sensor area

SOFFITTO LUNA_T_EVO



IK08 IP65



Apparecchio LED integrato

Corpo in TRP

Schermo in PC opale

Driver integrato

Built-in LED fitting

TRP body

Opal PC screen

Built-in driver




a



b

CCT modificabile
Changeable CCT



SOFFITTO LUNA_O_EVO



IK08 IP65



Apparecchio LED integrato

Corpo in TRP

Schermo in PC opale

Driver integrato

Built-in LED fitting

TRP body

Opal PC screen

Built-in driver



a



c

CCT modificabile
Changeable CCT





CODICE / CODE	41050	41051
BEAM	110°	110°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K	3000K/4000K/6000K
LUMEN	1250/1300/1350	1900/1950/2000
Sorgente luminosa W / Light Source W:	12W	18W
Sorgente luminosa / Light Source lumen:	1550/1580/1610	2350/2380/2410
Class Energetical/Energy Class:	E	E
CRI	>80	>80
LED	Epistar	Epistar
WATT	12W	18W
PF	>0.5	>0.5
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0.217	0.295
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	Ø181	Ø222
b	47	47

CODICE / CODE	41053	41054
BEAM	110°	110°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K	3000K/4000K/6000K
LUMEN	1250/1300/1350	1900/1950/2000
Sorgente luminosa W / Light Source W:	12W	18W
Sorgente luminosa / Light Source lumen:	1550/1580/1610	2350/2380/2410
Class Energetical/Energy Class:	E	E
CRI	>80	>80
LED	Epistar	Epistar
WATT	12W	18W
PF	>0.5	>0.5
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0.219	0.312
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	205	267
b	105	137
c	47	47

PARETE TILE 100







- Apparecchio LED integrato
- Corpo in TRP
- Schermo in PC opale
- Driver integrato
- Temperatura colore selezionabile
- Built-in LED fitting
- TRP body
- Opal PC screen
- Built-in driver
- Selectable colour temperature



PARETE TILE 200



- Apparecchio LED integrato
- Corpo in TRP
- Schermo in PC opale
- Driver integrato
- Temperatura colore selezionabile
- Built-in LED fitting
- TRP body
- Opal PC screen
- Built-in driver
- Selectable colour temperature

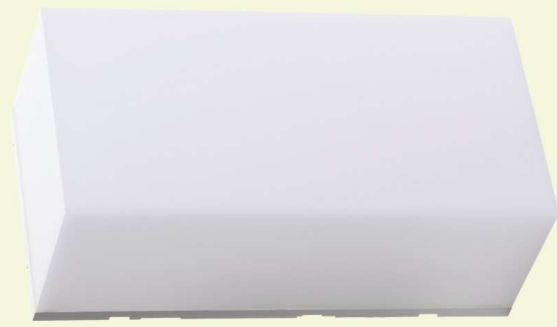

CODICE / CODE	41275
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	400/620/640
Sorgente luminosa W / Light Source W:	5W
Sorgente luminosa / Light Source lumen:	740/760/780
Class Energetical/Energy Class:	D
CRI	>80
LED	Epistar
WATT	5W
PF	>0.5
SUPPLY	220-240V 50/60Hz
KG	0.159
PCS	20
DIMENSIONI / DIMENSIONS	
a	100
b	100
c	75



CODICE / CODE	41276
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	950/1000/1050
Sorgente luminosa W / Light Source W:	8W
Sorgente luminosa / Light Source lumen:	1200/1220/1240
Class Energetical/Energy Class:	D
CRI	>80
LED	Epistar
WATT	8W
PF	>0.5
SUPPLY	220-240V 50/60Hz
KG	0.272
PCS	20
DIMENSIONI / DIMENSIONS	
a	100
b	200
c	75

PARETE TILE 300




CE

- Apparecchio LED integrato
- Corpo in TRP
- Schermo in PC opale
- Driver integrato
- Temperatura colore selezionabile
- Built-in LED fitting
- TRP body
- Opal PC screen
- Built-in driver
- Selectable colour temperature





IP > 44

PARETE TILE 250



CE

- Apparecchio LED integrato
- Corpo in TRP
- Schermo in PC opale
- Driver integrato
- Temperatura colore selezionabile
- Built-in LED fitting
- TRP body
- Opal PC screen
- Built-in driver
- Selectable colour temperature

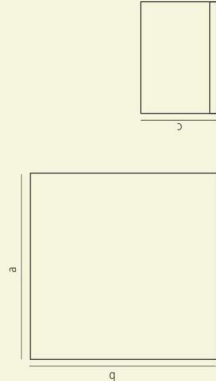


CODICE / CODE	41277
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	1700/1750/1800
Sorgente luminosa W / Light Source W:	15W
Sorgente luminosa / Light Source lumen:	2050/2100/2150
Class Energetical/Energy Class:	D
CRI	>80
LED	Epistar
WATT	15W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,369
PCS	20
DIMENSIONI / DIMENSIONS	
a	100
b	300
c	75

CODICE / CODE	41278
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	2300/2530/2400
Sorgente luminosa W / Light Source W:	20W
Sorgente luminosa / Light Source lumen:	2750/2850/2950
Class Energetical/Energy Class:	D
CRI	>80
LED	Epistar
WATT	20W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,415
PCS	10
DIMENSIONI / DIMENSIONS	
a	250
b	250
c	75


IP > 44

PROIETTORI AKRON



Proiettore LED integrato
Corpo in pressofusione di alluminio
Schermo in PC trasparente con lenti
Driver incluso

LED Floodlight
Die-cast aluminium body
Transparent PC diffuser with lenses
Built-in driver



Non-replaceable
light source



Non-replaceable
control gear

CODICE / CODE	41263	41264	41265	41266
BEAM	60°	60°	60°	60°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	3000K	3000K	3000K	3000K
LUMEN 360	4500	9500	19000	29000
LUMEN 90	4000	8200	16500	24800
Class Energetical/Energy Class:	F	F	F	F
CRI	>80	>80	>80	>80
LED	SZMTC	SZMTC	SZMTC	SZMTC
	SMD 2835	SMD 2835	SMD 2835	SMD 2835
WATT	50W	100W	200W	300W
PF	>0,9	>0,9	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,55	1	1,68	2,56
PCS	20	10	5	5
DIMENSIONI / DIMENSIONS				
a	234	282	383	433
b	24	24	26	31,5
c	178	222	295	340



CODICE / CODE	41267	41268	41269	41270
BEAM	60°	60°	60°	60°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	4000K	4000K	4000K	4000K
LUMEN 360	4550	9550	19050	29050
LUMEN 90	4050	8250	16550	24850
Class Energetical/Energy Class:	F	F	F	F
CRI	>80	>80	>80	>80
LED	SZMTC	SZMTC	SZMTC	SZMTC
	SMD 2835	SMD 2835	SMD 2835	SMD 2835
WATT	50W	100W	200W	300W
PF	>0,9	>0,9	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,55	1	1,68	2,56
PCS	20	10	5	5
DIMENSIONI / DIMENSIONS				
a	234	282	383	433
b	24	24	26	31,5
c	178	222	295	340

CODICE / CODE	41271	41272	41273	41274
BEAM	60°	60°	60°	60°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	6500K	6500K	6500K	6500K
LUMEN 360	4600	9600	19100	29100
LUMEN 90	4100	8300	16600	24900
Class Energetical/Energy Class:	F	F	F	F
CRI	>80	>80	>80	>80
LED	SZMTC	SZMTC	SZMTC	SZMTC
	SMD 2835	SMD 2835	SMD 2835	SMD 2835
WATT	50W	100W	200W	300W
PF	>0,9	>0,9	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,55	1	1,68	2,56
PCS	20	10	5	5
DIMENSIONI / DIMENSIONS				
a	234	282	383	433
b	24	24	26	31,5
c	178	222	295	340



Proiettore LED integrato nero
Corpo in pressofusione di alluminio
Diffusore in vetro satinato e driver integrato

Black LED Floodlight
Die-cast aluminium body
Frosted glass diffuser
Built-in driver



ACCESSORI
ACCESSORIES

11074 Picchetto nero/Black spike

IP>44


CODICE / CODE	41929	41930
BEAM	120°	120°
COLORE / COLOUR	nero/black	nero/black
COLORE LUCE / COLOR T	3000K/4000K/6000K	3000K/4000K/6000K
LUMEN	950lm/900lm/970lm	1700lm/1800lm/1740lm
Sorgente luminosa W / Light Source W:	10W	20W
Sorgente luminosa / Light Source lumen:	1100lm/1150lm/120lm	2200lm/2300lm/2240lm
Class Energetical/Energy Class:	E	E
CRI	>80	>80
WATT	10W	20W
PF	>0.9	>0.9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0.187	0.212
PCS	40	40
DIMENSIONI / DIMENSIONS		
a	100	110
b	75	85
c	35	35

CODICE / CODE	41931
BEAM	120°
COLORE / COLOUR	nero/black
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	2550lm/2700lm/2610lm
Sorgente luminosa W / Light Source W:	30W
Sorgente luminosa / Light Source lumen:	3300lm/3450lm/3360lm
Class Energetical/Energy Class:	E
CRI	>80
WATT	30W
PF	>0.9
SUPPLY	220-240V 50/60Hz
KG	0.255
PCS	20
DIMENSIONI / DIMENSIONS	
a	132
b	108
c	35

TERRA KANDO_T



Incasto calpestabile
Corpo in pressofusione di alluminio
Anello in acciaio inox AISI 316
Vetro temperato trasparente
Cassaforma in PVC
Walk-over recessed fitting
Die-cast aluminium body
AISI 316 stainless steel ring
Transparent tempered glass
PVC frame-work



CODICE / CODE	40157
COLORE / COLOUR	INOX
LAMP	GU10
WATT	HALO Max 50W
SUPPLY	230V 50/60Hz
FORO / HOLE	Ø100
KG	0,7
PCS	20
DIMENSIONI / DIMENSIONS	
a	110
b	100
c	122
d	140
ACCESSORI	
40015	Connettore IP67 una via
40016	Connettore IP67 una via

