


The Power Stripelite is a fitting which is designed to be comfortable but still withstand violence, the product is widely used in environments which are sensitive for molest. The Power Stripelite is mainly used as the main lighting in tunnels, underpasses and canopies. With the Power Stripelite it is possible to achieve a vandal-resistant line of light.

CE

IP65

IK16

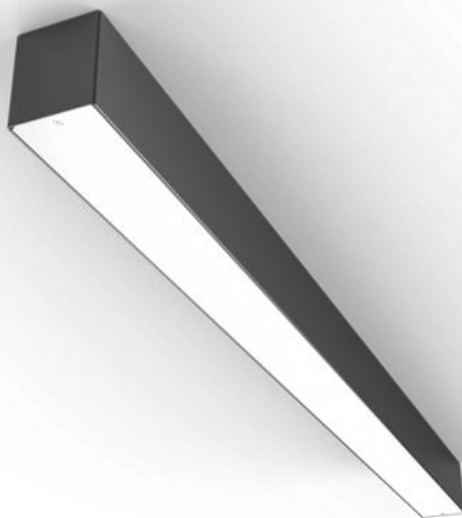

### Specifications

|                  |                         |
|------------------|-------------------------|
| Housing material | Stainless steel         |
| Surface finish   | Powder coated           |
| Cover material   | Acrylic opal (75% lt.)  |
| LED type         | Bridgelux 2835 LED      |
| CRI              | ≥ 90                    |
| Voltage          | 230 V                   |
| Lifetime fixture | 30 years                |
| Lifetime LED     | L90B10 @ 100.000h, 25°C |
| Dimmable         | DALI                    |
| Future proof     | Yes                     |
| Net efficiency   | 148 Lumen/Watt          |



# LIGHT

INTERNATIONAL

| Typenumber   | Dimensions   | Lumen      | Load  | Weight |
|--------------|--------------|------------|-------|--------|
| PSL6 1 3K B  | 625x61x73mm  | 1.155 lm   | 7.8W  | 4kg    |
| PSL6 R 3K B  | 625 x61x73mm | On request |       | 4kg    |
| PSL9 2 3K B  | 925x61x73mm  | 1.740 lm   | 12W   | 6kg    |
| PSL9 R 3K B  | 925x61x73mm  | On request |       | 6kg    |
| PSL12 3 3K B | 1225x61x73mm | 2.260 lm   | 15.9W | 8kg    |
| PSL12 R 3K B | 1225x61x73mm | On request |       | 8kg    |
| PSL15 4 3K B | 1525x61x73mm | 2.940 lm   | 20W   | 10kg   |
| PSL15 R 3K B | 1525x61x73mm | On request |       | 10kg   |

Colour black (RAL 9005) Standard (B)

Colour white (RAL 9016) Replace B for W

Colour grey (RAL 7035) Replace B for G

LED Colour temperature Replace 3K for 4K

Warranty 10 years

Country of origin The Netherlands

SROI > 25% of our production



Latest development 08/01/2024

LDT/IES file Download via website




**LIGHT**  
INTERNATIONAL

Armatuur



RVS Montage profiel

L + 6 mm



B + 4 mm

