


SIRENA

SIGNALING SOLUTIONS FOR QUEUE MANAGEMENT




Whatever device you choose...

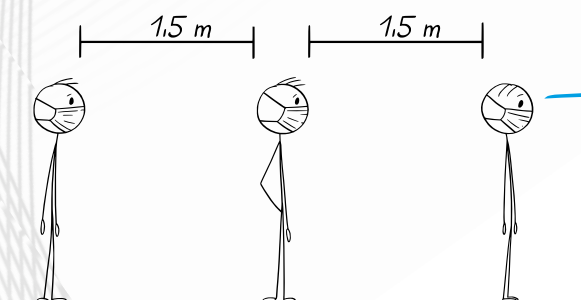

Keep the distance and look at the color!



SMART-Q

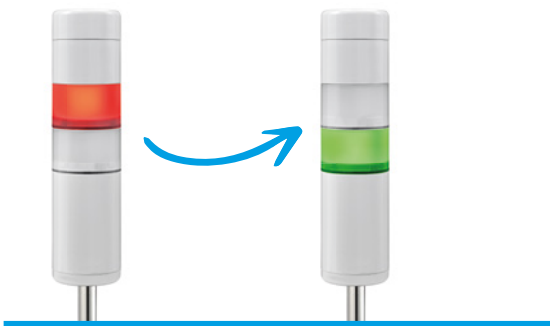

SMART-Q is a luminous-acoustic signaling device for queue management. The configuration consists of a **steady green light with “beep” sound and flashing red light** mounted on extension and support base. The operation is through the **battery** (positioned in the base) or by **mains power** (230Vac/50Hz).

SMART-Q allows two modes of operation:

- **automatic**: the red module of the device flashes; by pressing the button “A” of the remote control the green module lights up with “beep” sound for the time set* and then return red flashing again;
- **manual**: by pressing the “B” button of the radio control the device passes from flashing red to

fixed green with “beep” sound and remains in this state until a new press of the button “B”.

* In automatic mode the green light turn-on time can be selected from 2 to 12 seconds.

SMART-Q:

- **Battery** power: **8 hours** of continuous operation
- **Mains** power supply: **230Vac/50Hz**
- **Remote control** for automatic control (green light turn-on time: 2 to 12 sec.) or **manual**
- Height: 135 cm



EOS



EOS is also available in other configurations and voltages

EOS is a LED modular stacklight with steady light. Configuration **36901** is made up of a **wiring module (12/24VACDC)**, **2 luminous module** with opaline clear lens (red + green colored LED) and closure top cap; configuration **36903** has **in addition the acoustic module**, multisound with a sound intensity of 75 dB(A)1m. Accessories for every installation need are available.

EOS:

- Diameter **70mm** - Height **208mm (36901)**
- Diameter **70mm** - Height **248mm (36903)**
- Voltage: **12/24VACDC** or **110/240VAC**. Versions **36901 and 36903: 12/24VACDC**
- **Steady** light (other effects via PLC)
- **Direct installation** on a flat surface or by means of **accessories** for surface or side mounting



- *5 = L10 CM
- *6 = L20 CM
- *7 = L40 CM



XLF S



XLF S + DEEP
90153 + 90368



XLF S + DEEP
90154 + 90368

XLF S is also with **allCOLOR** lens available (colored lens and light source) and in Proximity version (opaline lens for near signalization) and it is possible to match it with other bases for different type of mounting and/or voltages)

XLF S is a **multifunctional** LED beacon that allows **three light effects** (steady light, flashing, strobe) thanks to the multichannel technology. This version is provided with **allCLEAR** lens (clear lens with colored light source) in Directional version (Fresnel lens for long-distance signalization). The luminous device is combined

with **DEEP** base (12/24VACDC) for flat surface mounting.

XLF S:

- Diameter **92mm** - Height **83mm** (with **DEEP** base **90368**)
- Voltage according to the installed base: 12/24VACDC, 40/80VACDC or 120/240VAC. **With DEEP base 90368: 12/24VACDC**
- **Steady light, flashing light (1F), strobe effect (5F)**
- Installation according to the base



XLF RGB



XLF RGB + DEEP
90156 + 90368

XLF RGB is also with in Proximity version available (opaline lens for near signalization) and it is possible to match it with other bases for different type of mounting and/or voltages

XLF RGB is a **multicolor** LED beacon that allows **three separate levels of alarm**, for each level **eight different colors and five light effects** (steady light, single flash, double flash, 4x strobe effect or random effect) can be selected via the two switches on the circuit. This version is provided with **Directional lens** (Fresnel lens for long-distance signalization). The luminous device is combined with **DEEP** base (12/24VACDC) for flat surface mounting.

XLF RGB:

- Diameter **92mm** - Height **83mm** (with **DEEP** base **90368**)
- Voltage according to the installed base: 12/24VACDC, 40/80VACDC or 120/240VAC. **With DEEP base 90368: 12/24VACDC**
- **Multicolor: 8 different colors**
- **Steady light, flashing (1F-2F-4F), random effect**
- Installation according to the base



DEEP
90368*

*12/24VACDC
other voltages and colors available



SHALLOW
90367*

*12/24VACDC
other voltages and colors available



WALL
90370*

*12/24VACDC
other voltages and colors available



DOUBLE
90372*

*12/24VACDC
other voltages and colors available



TLINE



TLINE
69786



WALL
BRACKET
69784



KIT SS
2776*

*5 = L10 CM
*6 = L20 CM
*7 = L40 CM

+
69785

TLINE is also in other configurations and voltages available or with **allCLEAR** lens (clear lens with colored light source)

TLINE is a **LED traffic light with steady, flashing or strobe light**. This configuration is made up of wiring base for **2 XLF S** (24VACDC) modules with **allCOLOR** lens (colored lens and light source), in **Directional** version (Fresnel lens for long-distance signalization). Accessories for every installation need are available.

TLINE:

- Width **120mm** - Height **231mm (69786)**
- Voltage according to the installed base: 24VACDC or 120/240VAC. **Version 69786: 24VACDC**
- **Steady** light, **flashing (1F)**, **strobe effect (5F)**
- **Direct wall mount**. By means of accessories: swivel wall or surface mounting with adapter



E-LITE



E-LITE LED CABLE
28253



E-LITE LED CABLE
28254

E-LITE is also with **QC M12** connector available

E-LITE is a **LED steady light beacon** equipped with **1m cable**. The clear opaline lens and the vertically lined refractor allow a perfect light distribution over 360° and the clear distinction between the ON and OFF status of the device.

E-LITE:

- Diameter **70mm** - Height **56mm** (excluding the cable gland)
- Voltage 24VDC
- **Steady** light
- Surface mount