



**Ω HOME GA<sup>®</sup>**  
ILLUMINAZIONE

# INTERNO/INDOOR

## PANNELLI/PANELS

PANNELLO\_LED 60X60  
PANNELLO\_LED 60X60 UGR<19  
PANNELLO\_LED 30X120  
PANNELLO\_LED 30X120 UGR<19

## LAMPADA RICARICABILE RECHARGEABLE LAMP

# 3in1

## INCASSI/DOWN LIGHTS

LEDSPOT\_TRP1  
LEDSPOT\_MULTI-LIGHT

## SOFFITTO · PARETE/CEILING · WALL

PLAFOLED\_T\_CCT

## INDUSTRIALE/INDUSTRIAL

STAGNA\_IP65

# ESTERNO/OUTDOOR

## PROIETTORI/FLOOD LIGHTS



AKRON  
LAMPO  
PIKKO

## SOFFITTO/CEILING

LUNA\_T\_EVO  
LUNA\_O\_EVO  
ORFEO\_T  
ORFEO\_Q  
EOS\_T  
EOS\_Q  
TILE 100  
TILE 200  
TILE 300  
TILE 250  
KANDO\_T

## TRANSFORMATORI ED ACCESSORI TRANSFORMERS & ACCESSORIES

# PANNELLO\_LED

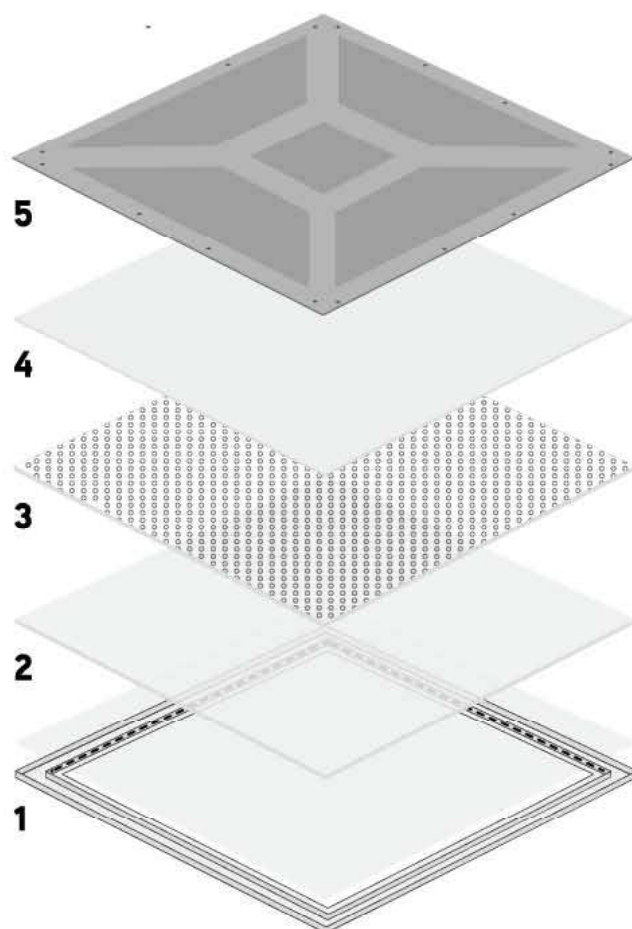

**CORNICE ALLUMINIO CON STRISCE LED**  
 Profilo in alluminio da 290 gr concepito per una migliore dissipazione del calore e dotato di una struttura meccanicamente più stabile. Cornice di alluminio con striscia LED con chip 4014 ad alta efficienza anziché chip 2835 a bassa efficienza luminosa.

**ALUMINIUM FRAME WITH LED STRIPS**  
 Aluminium frame with 290g structure provides a better heat dissipation and a more stable mechanical structure. Led strips high lumen efficiency 4014 chip instead of low efficiency 2835 chip.

**DIFFUSORE**  
 Diffusore in PS da 1,2 mm garantisce l'uniformità dell'emissione ed il mantenimento della temperatura colore (°K). Non usiamo diffusori in PP che ingialliscono in breve tempo modificando la temperatura di colore.

**DIFFUSER**  
 1,2 mm PS diffuser ensures light smoothness and colour temperature maintenance (°K) over time. We do not mount PP diffusers which turn yellowish and modify the colour temperature in a very short time

**LGP**  
 In PMMA da 2,8 mm di qualità assicura un alto indice di mantenimento del flusso luminoso anziché PP o PS che causano un decadimento del flusso luminoso nel breve periodo.

**LGP**  
 2,8 mm quality PMMA LGP ensures high luminous flux maintenance over time instead of PP or PS which cause a drastic lumen depreciation.

**CARTA RIFLETTENTE**  
 Foglio PET a doppio rivestimento che migliora l'efficienza luminosa.

**PAPER REFLECTOR**  
 Double coated PET sheet which improves light efficiency.

**TAMPONAMENTO DI CHIUSURA**  
 CLOSING SHEET







# PANNELLI PANNELLO\_LED 60X60



Apparecchio da incasso/  
soffitto/sospensione LED integrato  
Corpo in alluminio verniciato  
LGP in PMMA  
Diffusore in PS  
Driver incluso

Recessed/ceiling/suspension fitting  
with built-in LED  
Painted aluminium body  
PMMA LGP  
PS Diffuser  
Driver included  
L80B30\_50000hrs

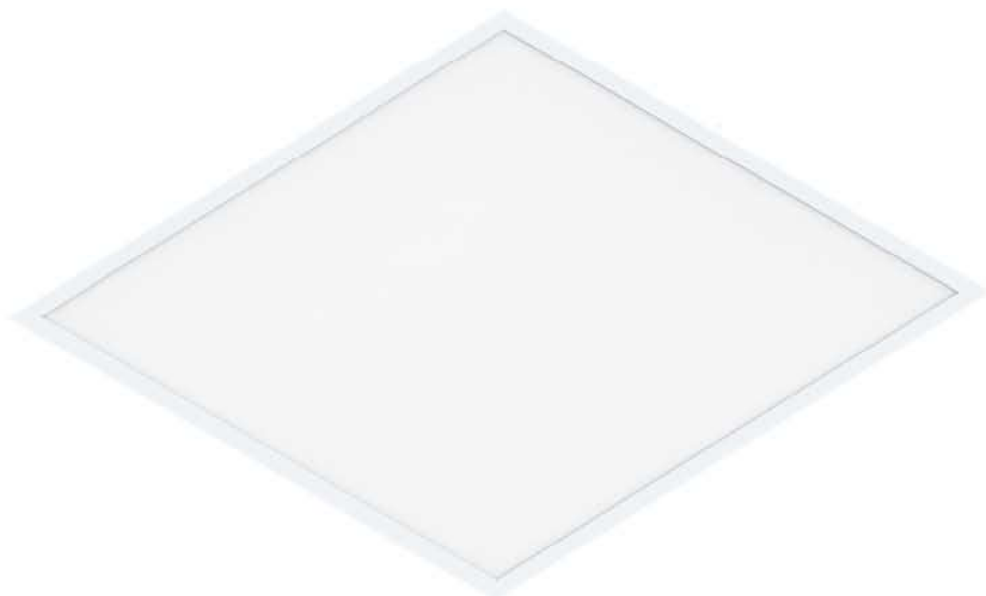

**42538**  
cornice per montaggio cartongesso /  
frame for recessed mounting  
620x620



**42539**  
accessorio soffitto H mm.43/  
ceiling accessory H mm.43



**11622/2**  
accessorio sospensione H mt.2 /  
suspension accessory H mt.2



Sorgente luminosa sostituibile  
solo da tecnico abilitato  
Replaceable light source by  
a professional



Driver sostituibile solo da  
tecnico abilitato  
Replaceable control gear by  
a professional



CODICE / CODE	41649	41650
BEAM	110	110
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	3600	4000
Sorgente luminosa W / Light Source W:	36W	36W
Sorgente luminosa / Light Source lumen:	4600	4600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	230V 50/60Hz	230V 50/60Hz
DRIVER	1000mA/25-40V flicker-free	1000mA/25-40V flicker-free
KG	2,3	2,3
PCS	5	5
DIMENSIONI / DIMENSIONS		
a	595	595
b	8,5	8,5

ACCESSORI	42683	Driver ONE4ALL 220-240V 12-42V 650-1110mA Dali, Push, I-10V	listino prezzi Logica/Logica pricelist
ACCESSORIES	40314	Driver 110-277V 14-42V 400-1100mA I-10V	
	12551	Emergenza/Emergency 30%- 90min MAX 40W	listino prezzi Logica/Logica pricelist




# PANNELLI PANNELLO\_LED 30X120



Apparecchio da incasso/  
soffitto/sospensione LED integrato  
Corpo in alluminio verniciato  
LGP in PMMA  
Diffusore in PS  
Driver incluso

Recessed/ceiling/suspension fitting  
with built-in LED  
Painted aluminium body  
PMMA LGP  
PS Diffuser  
Driver included  
L80B30\_50000hrs



**42542**  
cornice per montaggio cartongesso /  
frame for recessed mounting  
320x1220



**42540**  
accessorio soffitto H mm 43/  
ceiling accessory H mm 43



**11622/3**  
accessorio sospensione H mt.2 /  
suspension accessory H mt.2



Sorgente luminosa sostituibile  
solo da tecnico abilitato  
Replaceable light source by  
a professional



Driver sostituibile solo da  
tecnico abilitato  
Replaceable control gear by  
a professional



CODICE / CODE	41651	41652
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	3600	4000
Sorgente luminosa W / Light Source W:	36W	36W
Sorgente luminosa / Light Source lumen:	4600	4600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	230V 50/60Hz	230V 50/60Hz
DRIVER	1000mA/25-40V flicker-free	1000mA/25-40V flicker-free
KG	2,6	2,6
PCS	5	5
<b>DIMENSIONI / DIMENSIONS</b>		
a	1195	1195
b	295	295
c	9	9

ACCESSORI	42683	Driver ONE4ALL 220-240V 12-42V 650-1110mA Dali, Push, I-10V	listino prezzi Logica/Logica pricelist
ACCESSORIES	40314	Driver 110-277V 14-42V 400-1100mA I-10V	
	12551	Emergenza/Emergency 30%- 90min MAX 40W	listino prezzi Logica/Logica pricelist

# PANNELLI PANNELLO\_LED 30X120 UGR<19



Apparecchio da incasso/  
soffitto/sospensione LED integrato  
Corpo in alluminio verniciato  
LGP in PMMA  
Diffusore in PS  
Driver incluso

Recessed/ceiling/suspension fitting  
with built-in LED  
Painted aluminium body  
PMMA LGP  
PS Diffuser  
Driver included  
L80B30\_50000hrs



**42542**  
cornice per montaggio cartongesso /  
frame for recessed mounting  
320x1220



**42540**  
accessorio soffitto H mm 43/  
ceiling accessory H mm 43



**11622/3**  
accessorio sospensione H mt.2 /  
suspension accessory H mt.2




CODICE / CODE	41655	41656
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	3600	4000
Sorgente luminosa W / Light Source W:	36W	36W
Sorgente luminosa / Light Source lumen:	4600	4600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	230V 50/60Hz	230V 50/60Hz
DRIVER	1000mA/25-40V flicker-free	1000mA/25-40V flicker-free
KG	2,6	2,6
PCS	5	5
<b>DIMENSIONI / DIMENSIONS</b>		
a	1195	1195
b	295	295
c	9	9

<b>ACCESSORI</b>	<b>42683</b> Driver ONE4ALL 220-240V 12-42V 650-1110mA Dali, Push, I-10V	listino prezzi Logica/Logica pricelist
<b>ACCESSORIES</b>	<b>40314</b> Driver 110-277V 14-42V 400-1100mA I-10V	
	<b>12551</b> Emergenza/Emergency 30%- 90min MAX 40W	listino prezzi Logica/Logica pricelist



# 3in1 LAMPADA RICARICABILE



Lampada ricaricabile wireless dimmerabile e multifunzione:

- Lampada Tavolo
- Base magnetica per installazione parete
- Lampada con clip

3 temperature colore selezionabili  
Corpo in ABS


Wireless, rechargeable, dimmable, multi-function lamp

- Table Lamp
- Magnetic base for wall installation
- Clip lamp




3 selectable colour temperatures  
ABS plastic body




Tempo di ricarica  
Charging time  
3H



Autonomia batteria  
Battery autonomy  
5-6H

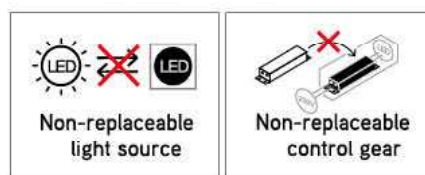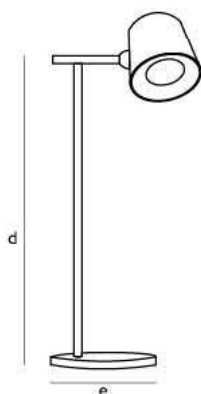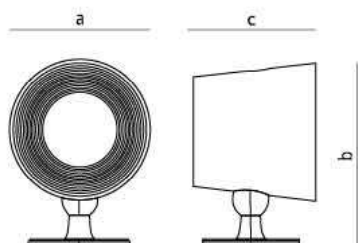

<b>CODICE / CODE</b>	42533	42534
<b>COLORE / COLOUR</b>	bianco/white	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K	3000K/4000K/6000K
<b>LUMEN</b>	120	120
<b>Sorgente luminosa W / Light Source W:</b>	2W	2W
<b>Sorgente luminosa / Light Source lumen:</b>	210	210
<b>Class Energetica/Energy Class:</b>	F	F
<b>CRI</b>	>80	>80
<b>LED</b>	BMTC	BMTC
<b>WATT</b>	2W	2W
<b>PF</b>	>0.7	>0.7
<b>SUPPLY</b>	DC 5V	DC 5V
<b>KG</b>	0.85	0.85
<b>PCS</b>	20	20
<b>DIMENSIONI / DIMENSIONS</b>		
<b>a</b>	Ø85	Ø85
<b>b</b>	110	110
<b>c</b>	75	75
<b>d</b>	355	355
<b>e</b>	120	120

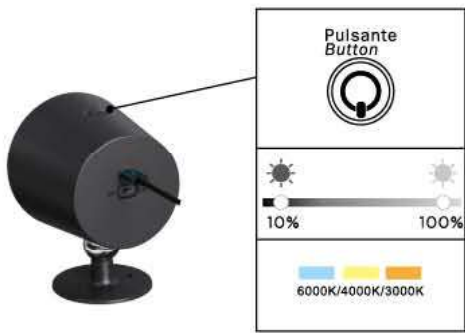

Dimmerabile  
*Dimmable*

CCT modificabile  
*Changeable CCT*



- Ricarica  
*Charging*
- Carica completa  
*Full charge*



Interuttore  
*Switch*



Base magnetica  
*Magnetic Base*



Regolazioni  
*Rotation angle*




# INCASSI LEDSPOT\_TRP1



Incasso LED integrato  
Corpo in TRP  
Diffusore in PC opale  
Driver integrato

Recessed fitting with built-in LED  
TRP body  
Opal PC diffuser  
Built-in driver

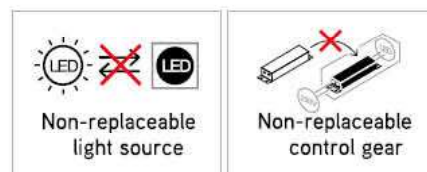




<b>CODICE / CODE</b>	<b>40517</b>	<b>40518</b>
<b>COLORE / COLOUR</b>	bianco/white	bianco/white
<b>COLORE LUCE / COLOR T</b>	3000K	4000K
<b>LUMEN</b>	2431	2487
<b>Sorgente luminosa W / Light Source W:</b>	30W	30W
<b>Sorgente luminosa / Light Source lumen:</b>	3300	3600
<b>Class Energetica/Energy Class:</b>	E	E
<b>CRI</b>	>80	>80
<b>LED</b>	Epistar	Epistar
<b>WATT</b>	30W	30W
<b>PF</b>	>0.9	>0.9
<b>SUPPLY</b>	230V 50/60Hz	230V 50/60Hz
<b>FORO / HOLE</b>	200	200
<b>KG</b>	0,45	0,45
<b>PCS</b>	20	20
<b>DIMENSIONI / DIMENSIONS</b>		
<b>a</b>	Ø230	Ø230
<b>b</b>	60	60

# INCASSI LEDSPOT\_MULTI-LIGHT



Incasso LED integrato  
Corpo in TRP  
Diffusore in PC opale  
Driver integrato  
Temperatura colore selezionabile

Recessed fitting with built-in LED  
TRP body  
Opal PC diffuser  
Built-in driver  
Selectable colour temperature

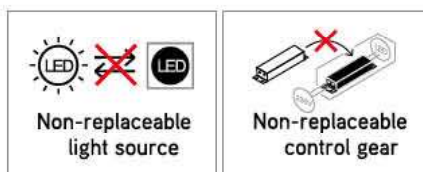

<b>CODICE / CODE</b>	4058 I
<b>COLORE / COLOUR</b>	bianco/white
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K
<b>LUMEN</b>	1962/2040/2088
<b>Sorgente luminosa W / Light Source W:</b>	24W
<b>Sorgente luminosa / Light Source lumen:</b>	2852/3152/3182
<b>Class Energetica/Energy Class:</b>	E
<b>CRI</b>	>80
<b>LED</b>	Epistar
<b>WATT</b>	24W
<b>PF</b>	>0.5
<b>SUPPLY</b>	230V 50/60Hz
<b>FORO / HOLE</b>	190
<b>KG</b>	0,14
<b>PCS</b>	40
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	Ø 220
<b>b</b>	25.5






# SOFFITTO/PARETE PLAFOLED\_T\_CCT




Apparecchio da soffitto LED integrato  
Corpo in metallo verniciato  
Diffusore in MS  
Driver incluso

Ceiling fitting Painted metal body  
MS diffuser  
Driver included

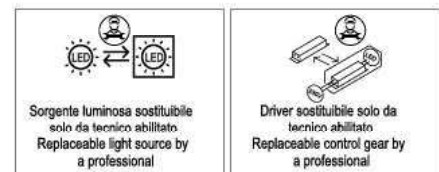


<b>CODICE / CODE</b>	<b>41048</b>	<b>41049</b>
<b>BEAM</b>	120°	120°
<b>COLORE / COLOUR</b>	bianco/white	bianco/white
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K	3000K/4000K/6000K
<b>LUMEN</b>	1938	2584
<b>Sorgente luminosa W / Light Source W:</b>	24W	32W
<b>Sorgente luminosa / Light Source lumen:</b>	2500	3400
<b>Class Energetica/Energy Class:</b>	F	F
<b>CRI</b>	>80	>80
<b>LED</b>	Nationstar	Nationstar
<b>WATT</b>	24W	32W
<b>PF</b>	0,7	0,7
<b>SUPPLY</b>	220-240V ,50/60Hz	220-240V ,50/60Hz
<b>DRIVER</b>	80mA/252V	200mA/144V
<b>KG</b>	0,7	0,5
<b>PCS</b>	10	10
<b>DIMENSIONI / DIMENSIONS</b>		
<b>a</b>	Ø 334	Ø 376
<b>b</b>	52	52

# INDUSTRIALE STAGNA\_IP65



Corpo in ABS e diffusore in PS  
 Base struttura interna in metallo  
 600mm 4 clips di chiusura  
 1200mm 10 clips di chiusura  
 1500mm 12 clips di chiusura  
 Collegamento diretto tensione di rete  
 Solo per tubi LED 230V

ABS body + PS diffuser  
 Internal tray in plated iron  
 600mm 4 latches  
 1200mm 10 latches  
 1500mm 12 latches  
 Direct connection to mains voltage  
 Only for LED tubes 230V





<b>CODICE / CODE</b>	<b>41555</b>	<b>41556</b>	<b>41557</b>	<b>41558</b>	<b>41559</b>	<b>41560</b>
	Mono	Mono	Mono	Bi	Bi	Bi
<b>KG</b>	0,53	0,90	1,19	0,67	1,22	1,57
<b>PCS</b>	12	12	8	8	4	4
<b>DIMENSIONI / DIMENSIONS</b>						
<b>a</b>	655	1263	1564	655	1263	1564
<b>b</b>	66	66	66	106	106	106
<b>c</b>	90	90	90	90	90	90

# PROIETTORI AKRON



Proiettore LED integrato  
Corpo in pressofusione di alluminio  
Schermo in PC trasparente con lenti  
Driver incluso

LED Floodlight  
Die-cast aluminium body  
Transparent PC diffuser with lenses  
Built-in driver

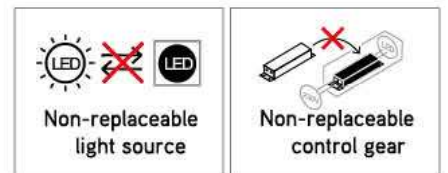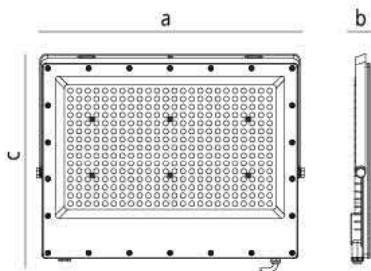

<b>CODICE / CODE</b>	<b>41263</b>	<b>41264</b>	<b>41265</b>	<b>41266</b>
<b>BEAM</b>	60°	60°	60°	60°
<b>COLORE / COLOUR</b>	nero/black	nero/black	nero/black	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K	3000K	3000K	3000K
<b>LUMEN 360</b>	4500	9500	19000	29000
<b>LUMEN 90</b>	4000	8200	16500	24800
<b>Class Energetica/Energy Class:</b>	F	F	F	F
<b>CRI</b>	>80	>80	>80	>80
<b>LED</b>	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835
<b>WATT</b>	50W	100W	200W	300W
<b>PF</b>	>0,9	>0,9	>0,9	>0,9
<b>SUPPLY</b>	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
<b>KG</b>	0,55	1	1,68	2,56
<b>PCS</b>	20	10	5	5
<b>DIMENSIONI / DIMENSIONS</b>				
<b>a</b>	234	282	383	433
<b>b</b>	24	24	26	31,5
<b>c</b>	178	222	295	340

<b>CODICE / CODE</b>	<b>41267</b>	<b>41268</b>	<b>41269</b>	<b>41270</b>
<b>BEAM</b>	60°	60°	60°	60°
<b>COLORE / COLOUR</b>	nero/black	nero/black	nero/black	nero/black
<b>COLORE LUCE / COLOR T</b>	4000K	4000K	4000K	4000K
<b>LUMEN 360</b>	4550	9550	19050	29050
<b>LUMEN 90</b>	4050	8250	16550	24850
<b>Class Energetica/Energy Class:</b>	F	F	F	F
<b>CRI</b>	>80	>80	>80	>80
<b>LED</b>	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835
<b>WATT</b>	50W	100W	200W	300W
<b>PF</b>	>0,9	>0,9	>0,9	>0,9
<b>SUPPLY</b>	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
<b>KG</b>	0,55	1	1,68	2,56
<b>PCS</b>	20	10	5	5
<b>DIMENSIONI / DIMENSIONS</b>				
<b>a</b>	234	282	383	433
<b>b</b>	24	24	26	31,5
<b>c</b>	178	222	295	340

<b>CODICE / CODE</b>	<b>41271</b>	<b>41272</b>	<b>41273</b>	<b>41274</b>
<b>BEAM</b>	60°	60°	60°	60°
<b>COLORE / COLOUR</b>	nero/black	nero/black	nero/black	nero/black
<b>COLORE LUCE / COLOR T</b>	6500K	6500K	6500K	6500K
<b>LUMEN 360</b>	4600	9600	19100	29100
<b>LUMEN 90</b>	4100	8300	16600	24900
<b>Class Energetica/Energy Class:</b>	F	F	F	F
<b>CRI</b>	>80	>80	>80	>80
<b>LED</b>	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835
<b>WATT</b>	50W	100W	200W	300W
<b>PF</b>	>0,9	>0,9	>0,9	>0,9
<b>SUPPLY</b>	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
<b>KG</b>	0,55	1	1,68	2,56
<b>PCS</b>	20	10	5	5
<b>DIMENSIONI / DIMENSIONS</b>				
<b>a</b>	234	282	383	433
<b>b</b>	24	24	26	31,5
<b>c</b>	178	222	295	340






# PROIETTORI LAMPO\_EVO\_CCT



Proiettore LED integrato nero  
Corpo in pressofusione di alluminio  
Diffusore in vetro satinato e driver integrato

Black LED Floodlight  
Die-cast aluminium body  
Frosted glass diffuser  
Built-in driver



**ACCESSORI  
ACCESSORIES**

**I 1074** Picchetto nero/Black spike



<b>CODICE / CODE</b>	<b>41929</b>	<b>41930</b>
<b>BEAM</b>	120°	120°
<b>COLORE / COLOUR</b>	nero/black	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K	3000K/4000K/6000K
<b>LUMEN</b>	850lm/900lm/870lm	1700lm/1800lm/1740lm
<b>Sorgente luminosa W / Light Source W:</b>	10W	20W
<b>Sorgente luminosa / Light Source lumen:</b>	1100lm/1150lm/1120lm	2200lm/2300lm/2240lm
<b>Class Energetica/Energy Class:</b>	E	E
<b>CRI</b>	>80	>80
<b>WATT</b>	10W	20W
<b>PF</b>	>0,9	>0,9
<b>SUPPLY</b>	220-240V 50/60Hz	220-240V 50/60Hz
<b>KG</b>	0.187	0.212
<b>PCS</b>	40	40
<b>DIMENSIONI / DIMENSIONS</b>		
<b>a</b>	100	110
<b>b</b>	75	85
<b>c</b>	35	35


<b>CODICE / CODE</b>	<b>41931</b>	<b>41932</b>
<b>BEAM</b>	120°	120°
<b>COLORE / COLOUR</b>	nero/black	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K	3000K/4000K/6000K
<b>LUMEN</b>	2550lm/2700lm/2610lm	4250lm/4500lm/4350lm
<b>Sorgente luminosa W / Light Source W:</b>	30W	50W
<b>Sorgente luminosa / Light Source lumen:</b>	3300lm/3450lm/3360lm	5500lm/5750lm/5600lm
<b>Class Energetica/Energy Class:</b>	E	E
<b>CRI</b>	>80	>80
<b>WATT</b>	30W	50W
<b>PF</b>	>0,9	>0,9
<b>SUPPLY</b>	220-240V 50/60Hz	220-240V 50/60Hz
<b>KG</b>	0.255	0.435
<b>PCS</b>	20	20
<b>DIMENSIONI / DIMENSIONS</b>		
<b>a</b>	132	180
<b>b</b>	108	130
<b>c</b>	35	35

# PROIETTORI PIKKO




Proiettore E27 completo di lampada PAR IP65 3000K 40° | 15°  
Corpo in materiale plastico

E27 outdoor fitting with IP65 3000K PAR 40° or | 15° included  
Plastic body



- APPARECCHIO COMPLETO DI LAMPADA IP65
- FITTING WITH IP65 BULB INCLUDED



<b>CODICE / CODE</b>	<b>41791</b>	<b>41792</b>
<b>BEAM</b>	40°	115°
<b>COLORE / COLOUR</b>	nero/black	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K	3000K
<b>LAMP</b>	E27	E27
<b>WATT</b>	6W	6W
<b>LUMEN Ø 360</b>	550	550
<b>LUMEN Ø 120</b>		520
<b>LUMEN Ø 90</b>	530	
<b>SUPPLY</b>	220-240V 50/60Hz	220-240V 50/60Hz
<b>KG</b>	0,175	0,175
<b>PCS</b>	20	20
<b>DIMENSIONI / DIMENSIONS</b>		
<b>a</b>	118	118
<b>b</b>	94	94
<b>c</b>	176	176
<b>d</b>	154	154

<b>CODICE / CODE</b>	<b>41793</b>	<b>41794</b>
<b>BEAM</b>	40°	115°
<b>COLORE / COLOUR</b>	nero/black	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K	3000K
<b>LAMP</b>	E27	E27
<b>WATT</b>	10W	10W
<b>LUMEN Ø 360</b>	900	900
<b>LUMEN Ø 120</b>		860
<b>LUMEN Ø 90</b>	870	
<b>SUPPLY</b>	220-240V 50/60Hz	220-240V 50/60Hz
<b>KG</b>	0,258	0,258
<b>PCS</b>	20	20
<b>DIMENSIONI / DIMENSIONS</b>		
<b>a</b>	135	135
<b>b</b>	126	126
<b>c</b>	178	178
<b>d</b>	154	154

<b>CODICE / CODE</b>	<b>41795</b>	<b>41796</b>
<b>BEAM</b>	40°	115°
<b>COLORE / COLOUR</b>	nero/black	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K	3000K
<b>LAMP</b>	E27	E27
<b>WATT</b>	15W	15W
<b>LUMEN Ø 360</b>	1300	1300
<b>LUMEN Ø 120</b>		1240
<b>LUMEN Ø 90</b>	1250	
<b>SUPPLY</b>	220-240V 50/60Hz	220-240V 50/60Hz
<b>KG</b>	0,318	0,318
<b>PCS</b>	20	20
<b>DIMENSIONI / DIMENSIONS</b>		
<b>a</b>	151	151
<b>b</b>	151	151
<b>c</b>	200	200
<b>d</b>	154	154



# SOFFITTO LUNA\_T\_EVO





Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC opale  
Driver integrato

Built-in LED fitting  
TRP body  
Opal PC screen  
Built-in driver



CCT modificabile  
Changeable CCT

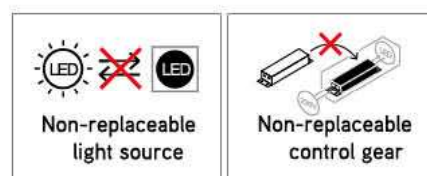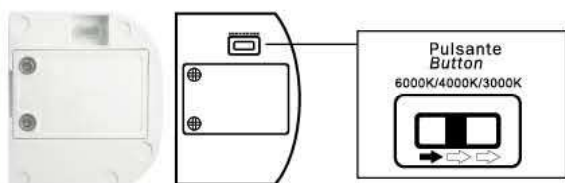

CODICE / CODE	41050	41051
<b>BEAM</b>	110°	110°
<b>COLORE / COLOUR</b>	bianco/white	bianco/white
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K	3000K/4000K/6000K
<b>LUMEN</b>	1250/1300/1350	1900/1950/2000
<b>Sorgente luminosa W / Light Source W:</b>	12W	18W
<b>Sorgente luminosa / Light Source lumen:</b>	1550/1580/1610	2350/2380/2410
<b>Class Energetica/Energy Class:</b>	E	E
<b>CRI</b>	>80	>80
<b>LED</b>	Epistar	Epistar
<b>WATT</b>	12W	18W
<b>PF</b>	>0,5	>0,5
<b>SUPPLY</b>	220-240V 50/60Hz	220-240V 50/60Hz
<b>KG</b>	0,217	0,295
<b>PCS</b>	20	20
<b>DIMENSIONI / DIMENSIONS</b>		
<b>a</b>	Ø181	Ø222
<b>b</b>	47	47

# SOFFITTO LUNA\_O\_EVO






Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC opale  
Driver integrato

Built-in LED fitting  
TRP body  
Opal PC screen  
Built-in driver




CCT modificabile  
Changeable CCT

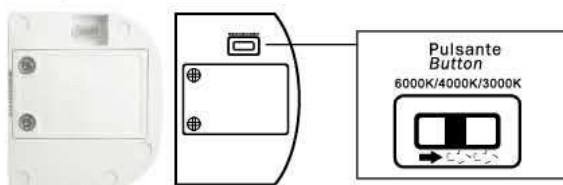




CODICE / CODE	41053	41054
<b>BEAM</b>	110°	110°
<b>COLORE / COLOUR</b>	bianco/white	bianco/white
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K	3000K/4000K/6000K
<b>LUMEN</b>	1250/1300/1350	1900/1950/2000
<b>Sorgente luminosa W / Light Source W:</b>	12W	18W
<b>Sorgente luminosa / Light Source lumen:</b>	1550/1580/1610	2350/2380/2410
<b>Class Energetica/Energy Class:</b>	E	E
<b>CRI</b>	>80	>80
<b>LED</b>	Epistar	Epistar
<b>WATT</b>	12W	18W
<b>PF</b>	>0,5	>0,5
<b>SUPPLY</b>	220-240V 50/60Hz	220-240V 50/60Hz
<b>KG</b>	0,219	0,312
<b>PCS</b>	20	20
<b>DIMENSIONI / DIMENSIONS</b>		
<b>a</b>	205	267
<b>b</b>	105	137
<b>c</b>	47	47

# PARETE ORFEO\_T




Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC satinato  
Luce diretta ed indiretta  
Driver integrato  
Temperatura colore selezionabile

Built-in LED fitting  
TRP body  
Frosted PC screen  
Direct and indirect lighting  
Built-in driver  
Selectable colour temperature

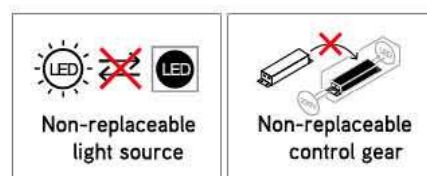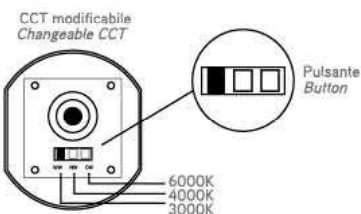




<b>CODICE / CODE</b>	43366
<b>BEAM</b>	60°
<b>COLORE / COLOUR</b>	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K
<b>LUMEN</b>	850+850/880+880/900+900
<b>Sorgente luminosa W / Light Source W:</b>	9+9W
<b>Sorgente luminosa / Light Source lumen:</b>	1100+1100/1150+1150/1200+1200
<b>Class Energetica/Energy Class:</b>	D
<b>CRI</b>	>80
<b>LED</b>	Epistar
<b>WATT</b>	9+9W
<b>PF</b>	>0,5
<b>SUPPLY</b>	220-240V 50/60Hz
<b>KG</b>	0,316
<b>PCS</b>	20
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	78
<b>b</b>	162
<b>c</b>	99

# PARETE ORFEO\_Q



Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC satinato  
Luce diretta ed indiretta  
Driver integrato  
Temperatura colore selezionabile

Built-in LED fitting  
TRP body  
Frosted PC screen  
Direct and indirect lighting  
Built-in driver  
Selectable colour temperature

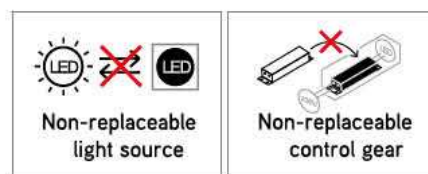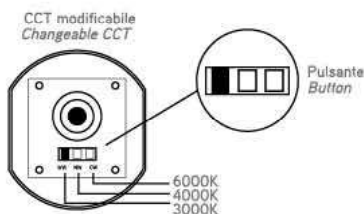

<b>CODICE / CODE</b>	43367
<b>BEAM</b>	60°
<b>COLORE / COLOUR</b>	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K
<b>LUMEN</b>	850+850/880+880/900+900
<b>Sorgente luminosa W / Light Source W:</b>	9+9W
<b>Sorgente luminosa / Light Source lumen:</b>	1100+1100/1150+1150/1200+1200
<b>Class Energetica/Energy Class:</b>	D
<b>CRI</b>	>80
<b>LED</b>	Epistar
<b>WATT</b>	9+9W
<b>PF</b>	>0,5
<b>SUPPLY</b>	220-240V 50/60Hz
<b>KG</b>	0,344
<b>PCS</b>	20
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	78
<b>b</b>	162
<b>c</b>	99






# PARETE ORFEO\_T



Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC satinato  
Luce diretta ed indiretta  
Driver integrato  
Temperatura colore selezionabile

Built-in LED fitting  
TRP body  
Frosted PC screen  
Direct and indirect lighting  
Built-in driver  
Selectable colour temperature

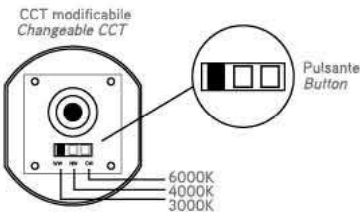




<b>CODICE / CODE</b>	43368
<b>BEAM</b>	60°
<b>COLORE / COLOUR</b>	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K
<b>LUMEN</b>	850/880/900
<b>Sorgente luminosa W / Light Source W:</b>	9W
<b>Sorgente luminosa / Light Source lumen:</b>	1100/1150/1200
<b>Class Energetica/Energy Class:</b>	D
<b>CRI</b>	>80
<b>LED</b>	Epistar
<b>WATT</b>	9W
<b>PF</b>	>0.5
<b>SUPPLY</b>	220-240V 50/60Hz
<b>KG</b>	0,23
<b>PCS</b>	20
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	78
<b>b</b>	117
<b>c</b>	99

# PARETE ORFEO\_Q



Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC satinato  
Luce diretta ed indiretta  
Driver integrato  
Temperatura colore selezionabile

Built-in LED fitting  
TRP body  
Frosted PC screen  
Direct and indirect lighting  
Built-in driver  
Selectable colour temperature

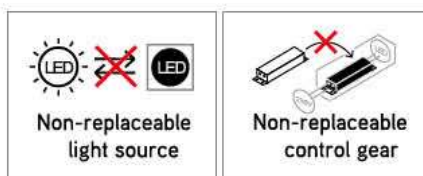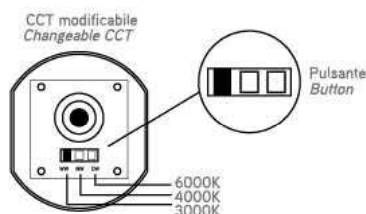

<b>CODICE / CODE</b>	43369
<b>BEAM</b>	60°
<b>COLORE / COLOUR</b>	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K
<b>LUMEN</b>	850/880/900
<b>Sorgente luminosa W / Light Source W:</b>	9W
<b>Sorgente luminosa / Light Source lumen:</b>	1100/1150/1200
<b>Class Energetica/Energy Class:</b>	D
<b>CRI</b>	>80
<b>LED</b>	Epistar
<b>WATT</b>	9W
<b>PF</b>	>0,5
<b>SUPPLY</b>	220-240V 50/60Hz
<b>KG</b>	0,25
<b>PCS</b>	20
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	78
<b>b</b>	117
<b>c</b>	99






# PARETE EOS\_T



Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC opale  
Driver integrato  
Temperatura colore selezionabile

Built-in LED fitting  
TRP body  
Opal PC screen  
Built-in driver  
Selectable colour temperature

Gabbia rimovibile  
Black cage removable

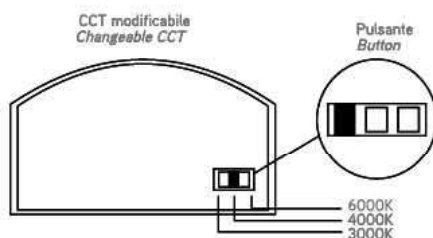

<b>CODICE / CODE</b>	43370
<b>COLORE / COLOUR</b>	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K
<b>LUMEN</b>	1200/1250/1300
<b>Sorgente luminosa W / Light Source W:</b>	15W
<b>Sorgente luminosa / Light Source lumen:</b>	1850/1900/1950
<b>Class Energetica/Energy Class:</b>	E
<b>CRI</b>	>80
<b>LED</b>	Epistar
<b>WATT</b>	15W
<b>PF</b>	>0,5
<b>SUPPLY</b>	220-240V 50/60Hz
<b>KG</b>	0,373
<b>PCS</b>	20
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	Ø170
<b>b</b>	110



# PARETE EOS\_Q

Gabbia rimovibile  
Black cage removable



Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC opale  
Driver integrato  
Temperatura colore selezionabile


Built-in LED fitting  
TRP body  
Opal PC screen  
Built-in driver  
Selectable colour temperature

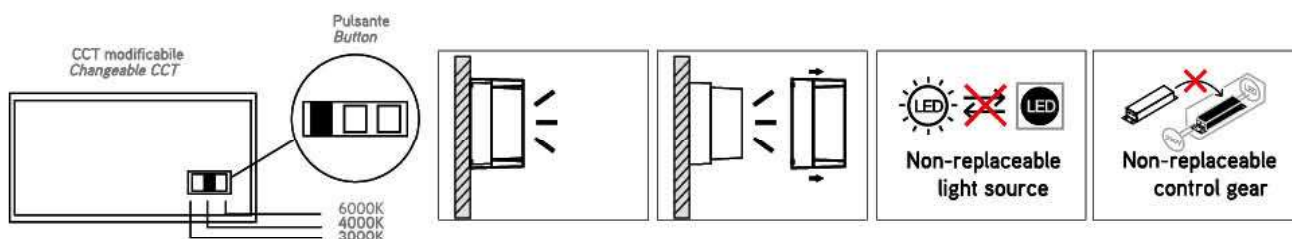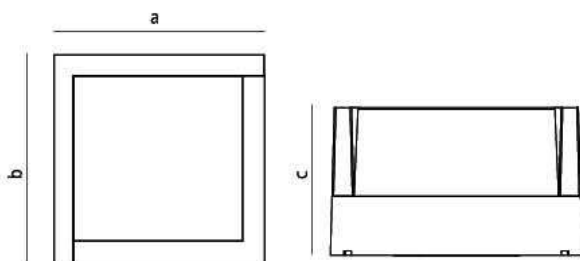

<b>CODICE / CODE</b>	43371
<b>COLORE / COLOUR</b>	nero/black
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K
<b>LUMEN</b>	1200/1250/1300
<b>Sorgente luminosa W / Light Source W:</b>	15W
<b>Sorgente luminosa / Light Source lumen:</b>	1850/1900/1950
<b>Class Energetica/Energy Class:</b>	E
<b>CRI</b>	>80
<b>LED</b>	Epistar
<b>WATT</b>	15W
<b>PF</b>	>0,5
<b>SUPPLY</b>	220-240V 50/60Hz
<b>KG</b>	0,415
<b>PCS</b>	20
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	160
<b>b</b>	160
<b>c</b>	110







# PARETE TILE 100




Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC opale  
Driver integrato  
Temperatura colore selezionabile

Built-in LED fitting  
TRP body  
Opal PC screen  
Built-in driver  
Selectable colour temperature

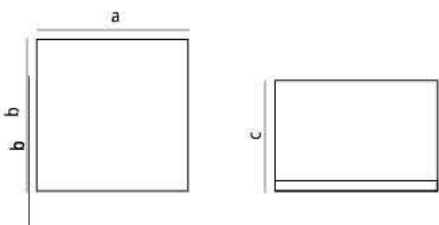




<b>CODICE / CODE</b>	41275
<b>COLORE / COLOUR</b>	bianco/white
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K
<b>LUMEN</b>	600/620/640
<b>Sorgente luminosa W / Light Source W:</b>	5W
<b>Sorgente luminosa / Light Source lumen:</b>	740/760/780
<b>Class Energetica/Energy Class:</b>	D
<b>CRI</b>	>80
<b>LED</b>	Epistar
<b>WATT</b>	5W
<b>PF</b>	>0,5
<b>SUPPLY</b>	220-240V 50/60Hz
<b>KG</b>	0,159
<b>PCS</b>	20
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	100
<b>b</b>	100
<b>c</b>	75

# PARETE TILE 200




Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC opale  
Driver integrato  
Temperatura colore selezionabile

Built-in LED fitting  
TRP body  
Opal PC screen  
Built-in driver  
Selectable colour temperature

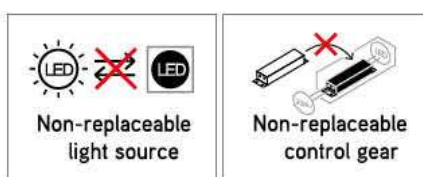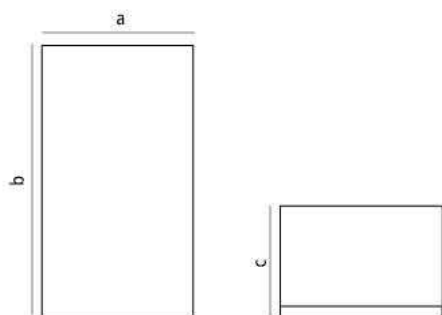




<b>CODICE / CODE</b>	41276
<b>COLORE / COLOUR</b>	bianco/white
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K
<b>LUMEN</b>	950/1000/1050
<b>Sorgente luminosa W / Light Source W:</b>	8W
<b>Sorgente luminosa / Light Source lumen:</b>	1200/1220/1240
<b>Class Energetica/Energy Class:</b>	D
<b>CRI</b>	>80
<b>LED</b>	Epistar
<b>WATT</b>	8W
<b>PF</b>	>0,5
<b>SUPPLY</b>	220-240V 50/60Hz
<b>KG</b>	0,272
<b>PCS</b>	20
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	100
<b>b</b>	200
<b>c</b>	75

# PARETE TILE 300




Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC opale  
Driver integrato  
Temperatura colore selezionabile

Built-in LED fitting  
TRP body  
Opal PC screen  
Built-in driver  
Selectable colour temperature

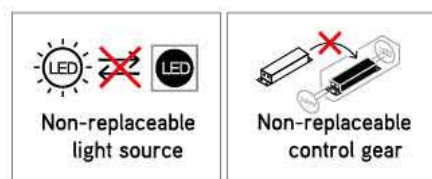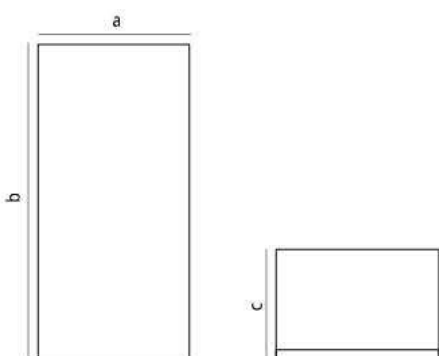




<b>CODICE / CODE</b>	41277
<b>COLORE / COLOUR</b>	bianco/white
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K
<b>LUMEN</b>	1700/1750/1800
<b>Sorgente luminosa W / Light Source W:</b>	15W
<b>Sorgente luminosa / Light Source lumen:</b>	2050/2100/2150
<b>Class Energetica/Energy Class:</b>	D
<b>CRI</b>	>80
<b>LED</b>	Epistar
<b>WATT</b>	15W
<b>PF</b>	>0,5
<b>SUPPLY</b>	220-240V 50/60Hz
<b>KG</b>	0,369
<b>PCS</b>	20
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	100
<b>b</b>	300
<b>c</b>	75

# PARETE TILE 250



Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC opale  
Driver integrato  
Temperatura colore selezionabile

Built-in LED fitting  
TRP body  
Opal PC screen  
Built-in driver  
Selectable colour temperature

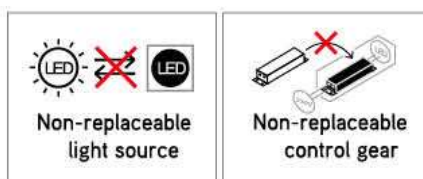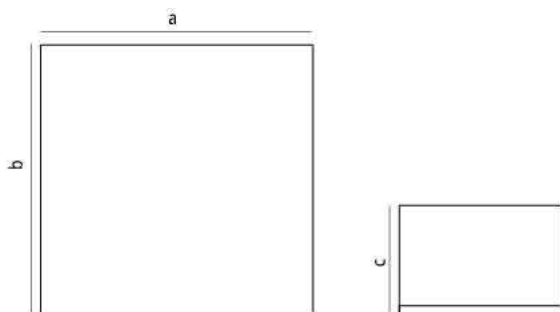

<b>CODICE / CODE</b>	41278
<b>COLORE / COLOUR</b>	bianco/white
<b>COLORE LUCE / COLOR T</b>	3000K/4000K/6000K
<b>LUMEN</b>	2300/2530/2400
<b>Sorgente luminosa W / Light Source W:</b>	20W
<b>Sorgente luminosa / Light Source lumen:</b>	2750/2850/2950
<b>Class Energetica/Energy Class:</b>	D
<b>CRI</b>	>80
<b>LED</b>	Epistar
<b>WATT</b>	20W
<b>PF</b>	>0,5
<b>SUPPLY</b>	220-240V 50/60Hz
<b>KG</b>	0,415
<b>PCS</b>	20
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	250
<b>b</b>	250
<b>c</b>	75




# TERRA KANDO\_T



Incasso calpestabile  
Corpo in pressofusione di alluminio  
Anello in acciaio inox AISI 316  
Vetro temperato trasparente  
Cassaforma in PVC

Walk-over recessed fitting  
Die-cast aluminium body  
AISI 316 stainless steel ring  
Transparent tempered glass  
PVC frame-work



<b>CODICE / CODE</b>	40157
<b>COLORE / COLOUR</b>	INOX
<b>LAMP</b>	GU10
<b>WATT</b>	HALO Max 50W
<b>SUPPLY</b>	230V 50/60Hz
<b>FORO / HOLE</b>	Ø100
<b>KG</b>	0,7
<b>PCS</b>	20
<b>DIMENSIONI / DIMENSIONS</b>	
a	105
b	100
c	115
d	140

**ACCESSORI**  
**ACCESSORIES**

**40015** Connettore IP67 una via  
**40016** Connettore IP67 una via







## TRASFORMATORI ELETTRONICI

Trasformatore elettronico LED 12V

LED electronic transformer 12V



<b>CODICE / CODE</b>	<b>22918</b>
	220-240V AC/50Hz
	Collegare max 4/5 lampadine LED
	Connect max 4/5 LED bulbs
<b>PRIMARIO / MAINS</b>	
<b>SECONDARIO / SECONDARY</b>	12V
<b>W</b>	2-50W
<b>IP</b>	20
<b>DIMENSIONS</b>	117 x 32 x H20

# KIT GU10/GZ10

Kit GU10/GZ 10      code.  
-40482









## CONDIZIONI GENERALI DI VENDITA ITALIA

- Porto franco: Euro 500,00
- Gli ordini di importo inferiore saranno gravati di Euro 20,00 in fattura a titolo di contributo spese
- Ordine minimo accettabile: Euro 250,00
- Imballo: gratis
- Tutti gli ordini si intendono sempre soggetti a conferma da parte della Società.
- La merce si intende resa franco ns. magazzini di San Marino e viaggio a rischio e pericolo del committente anche se spedita in porto franco. Eventuali reclami relativi al ricevimento della merce dovranno essere subito appuntati quali riserva sul d.d.t ed in ogni caso dovranno esserci segnalati in forma scritta entro e non oltre 8 giorni dal ricevimento della merce stessa, pena la loro inammissibilità.
- Non si assume impegno per la totale evasione dell'ordine e la mancanza di alcuni articoli commissionati non dà diritto a cliente di pretendere la rimanenza sospendendo il pagamento di quanto già ricevuto.
- Le modalità ed i tempi di pagamento convenuti nell'ordine dovranno essere tassativamente osservati ed in caso di ritardo si applicheranno gli interessi di mora.
- Per ogni controversia sarà competente il Foro della Repubblica di San Marino e si applicherà la Legge sammarinese.

I dati tecnici riportati nel presente catalogo possono essere modificati senza preavviso per una migliore sicurezza e funzionalità degli apparecchi.  
*The technical data shown in this catalogue may be modified without notice to increase the safety and functionality of the products.*

**MARINO CRISTAL SPA**

Via Guardia del Consiglio, 31  
47899 - Serravalle  
REP. DI SAN MARINO

TEL +378 0549 901188

FAX +378 0549 900612

[www.marinocristal.com](http://www.marinocristal.com)

[marinocristal@marinocristal.com](mailto:marinocristal@marinocristal.com)